

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
2 May 2002 (02.05.2002)

PCT

(10) International Publication Number
WO 02/35441 A2(51) International Patent Classification⁷: G06F 19/00

(21) International Application Number: PCT/US01/26297

(22) International Filing Date: 22 August 2001 (22.08.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

60/226,999	22 August 2000 (22.08.2000)	US
60/286,578	26 April 2001 (26.04.2001)	US
09/682,071	17 July 2001 (17.07.2001)	US
09/682,074	17 July 2001 (17.07.2001)	US
09/682,076	17 July 2001 (17.07.2001)	US

CA 95135 (US). WEINER, Nathan, K. [US/US]; 71 Walters Way, Stoughton, MA 02072 (US). MCKENZIE, Eric, E. [US/US]; 22 Bartlett Street, Malden, MA 02148 (US). STEPHENS, John, C. [US/US]; 625 Manzanita Avenue, Boulder Creek, CA 95006 (US). PATIL, Sangita, S. [IN/US]; 1701 Warburton Avenue, Santa Clara, CA 95050 (US).

(74) Agent: ZITKOVSKY, Ivan, D.; 6 Freeman Circle, Lexington, MA 02421-7713 (US).

(81) Designated States (*national*): AU, CA, JP, US.(84) Designated States (*regional*): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).

(71) Applicant (*for all designated States except US*): AFFYMETRIX, INC. [US/US]; 3380 Central Expressway, Santa Clara, CA 95051 (US).

Published:


— *without international search report and to be republished upon receipt of that report*

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): KAUSHIKKAR, Shantanu, V. [IN/US]; 3343 Ariel Joshua Court, San Jose,

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SYSTEM METHOD, AND COMPUTER SOFTWARE PRODUCT FOR CONTROLLING BIOLOGICAL MICROARRAY SCANNER

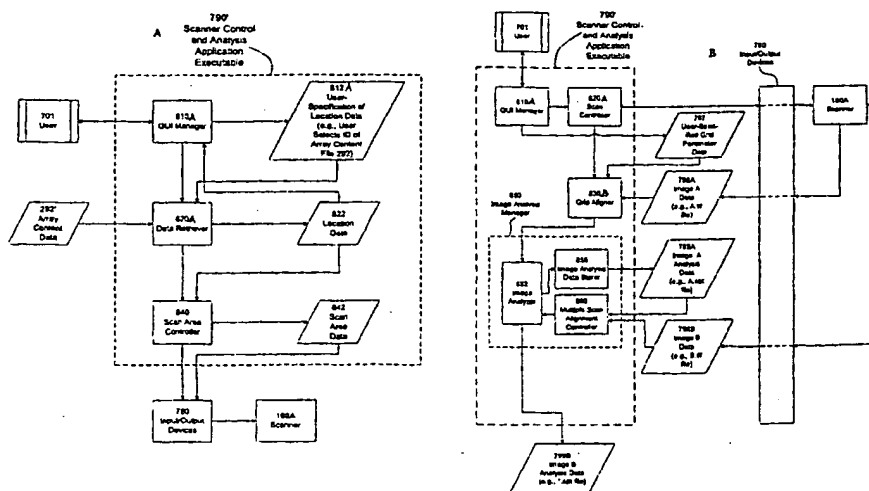

(57) Abstract: Systems, methods, and computer program products are described for adjusting the gain of a scanner. The scanner includes one or more excitation sources, an emission detector having a first gain, and a variable gain element having a second gain. One described method includes receiving a user-selected gain value, adjusting the first gain based on a first portion of the user-selected gain value, and adjusting the second gain based on a second portion of the user-selected gain value. Another described method includes selecting an auto-gain value, adjusting the first gain based on a first portion of the auto-gain value, adjusting the second gain based on a second portion of the auto-gain value; causing the scanner to collect sample-pixel intensity values, determining a comparison measure based on comparing the sample pixel intensity values to desired pixel intensity values, and adjusting the auto-gain value based on the comparison measure.

SYSTEM, METHOD, AND COMPUTER SOFTWARE PRODUCT FOR CONTROLLING BIOLOGICAL MICROARRAY SCANNER

5

RELATED APPLICATIONS

The present application relates to and claims priority from U.S. Provisional Patent Application Serial No. 60/226,999, titled "System, Method, and Product for Linked Window Interface," filed August 22, 2000, and U.S. Provisional Patent Application Serial No. 60/286,578, titled "System, Method, and Product for Scanning of Biological Materials," filed April 26, 2001, which are hereby incorporated herein by reference in their entireties for all purposes. The present application also relates to and claims priority from U.S. Patent Application 09/682,071 entitled "System, Method, And Computer Software Product For Controlling Biological Microarray Scanner," from U.S. Patent Application 09/682,074 entitled "System, Method, and Computer Program Product for Specifying a Scanning Area of a Substrate," and to U.S. Patent Application 09/682,076 entitled "System, Method, and Computer Software Product for Grid Alignment of Multiple Scanned Images," all of which were filed on July 17, 2001 and are hereby incorporated herein by reference in their entireties for all purposes.

20

BACKGROUND OF THE INVENTION

Field of the Invention:

The present invention relates to systems, methods, and products for scanning arrays of biological materials and, more particularly, for amplifying, analyzing, and displaying information obtained from scanning.

25

Related Art:

Synthesized probe arrays, such as Affymetrix® GeneChip® arrays, have been used to generate unprecedented amounts of information about biological systems. For example, a commercially available GeneChip® array set from Affymetrix, Inc. of Santa Clara, California, is capable of monitoring the expression levels of approximately 6,500 murine genes and expressed sequence tags (EST's). Experimenters can quickly design follow-on experiments with respect to genes, EST's, or other biological materials of interest by, for example, producing in their own laboratories microscope slides

containing dense arrays of probes using the Affymetrix® 417™ Arrayer or other spotting devices.

Analysis of data from experiments with synthesized and/or spotted probe arrays may lead to the development of new drugs and new diagnostic tools. In some conventional applications, this analysis begins with the capture of fluorescent signals indicating hybridization of labeled target samples with probes on synthesized or spotted probe arrays. The devices used to capture these signals often are referred to as scanners, an example of which is the Affymetrix® 428™ Scanner from Affymetrix, Inc. of Santa Clara, California.

There is a great demand in the art for methods for organizing, accessing and analyzing the vast amount of information collected by scanning microarrays. Computer-based systems and methods have been developed to assist a user to visualize the vast amounts of information generated by the scanners. These commercial and academic software applications typically provide such information as intensities of hybridization reactions or comparisons of hybridization reactions. This information may be displayed to a user in graphical form.

SUMMARY OF THE INVENTION

In general, the present invention is a scanning system, a method or a computer program product for scanning various types of arrays of biological material. There are numerous novel aspects associated with "smart," controlled scanning for examination of arrays.

According to one aspect, a scanning system, including an optical scanner controlled by a computer, is constructed and arranged to adjust emission based on a user-selected gain value by applying a gain to the emission signal.

In accordance with some embodiments, a provided computer program product is used to adjust the gain of a scanner. The scanner includes one or more excitation sources, an emission detector having a first gain, and a variable gain element having a second gain. The computer program product, when executed on a computer system, performs a method including: (a) providing a user interface that enables a user to select

a gain value; (b) receiving the user-selected gain value; (c) adjusting the first (or second) gain based, at least in part, on a first portion of the user-selected gain value; and (d) adjusting the second (or first) gain based, at least in part, on a second portion of the user-selected gain value. The word "adjusting" in this context includes increasing, decreasing, or leaving unchanged. The word "gain" includes amplification of a signal (i.e., a positive gain) and reduction of a signal (i.e., a negative gain).

In some implementations of these embodiments, the adjusting (c) includes (i) determining the first portion to be equal to a no-change value when the user-selected gain value is equal to or less than a threshold value, and (ii) determining the first portion to be equal to an excess of the user-selected gain value over the threshold value, when the user-selected gain value is greater than the threshold value. Also in these implementations, the adjusting (d) includes (i) determining the second portion to be equal to the user-selected gain value when the user-selected gain value is equal to or less than a threshold value, and (ii) determining the second portion to be equal to the threshold value when the user-selected gain value is equal to or greater than the threshold value. The term "no-change value" means a value indicating that no change should be made to the associated gain, i.e., the first gain in these implementations. The threshold value may be predetermined.

One advantage of using this computer program product is that the user simply provides a gain value, which may be a single value, and the product allocates the user-selected gain between the emission detector and the variable gain element. That is, in some implementations, this allocation may be made without user involvement. In addition to simplifying the procedure for the user, this arrangement provides the user-selected gain while optimizing the signal to noise ratio achieved at all gain settings. For example, this optimization may be achieved because the program allocates gain based on the operational characteristics of the emission detector. In some emission detectors, for instance, the signal to noise ratio may be good at low gain settings but decline at higher gains. In such circumstances, the computer program product may allocate a first portion of a user-selected gain to be implemented by the variable gain element, such as a variable gain amplifier, that has good signal to noise performance over this first range

of gains. If the user selects a gain that requires amplification outside of this first range, the computer program product allocates the additional portion of the user-selected gain (e.g., an amount greater than a threshold value based on the upper limit of the first range) to be implemented by the emission detector. The signal to noise ratio of the emission detector thus remains high because the detector is not pushed into its less desirable higher-gain range of operations. In typical applications, the performance characteristics of the emission detector and the variable gain element with respect to signal to noise at various gains are known by the scanner manufacturer. In these applications, the threshold level at which the computer program product allocates additional gain to be delivered by the emission detector may be a predetermined level, i.e., determined by the computer program product based on a data value in a look up table or in accordance with another conventional technique. In alternative implementations, the user may select the threshold value.

In some implementations, the method performed by the computer program product may further include (e) receiving a calibration gain for a first of the one or more excitation sources. The calibration gain may be based, at least in part, on an output of the emission detector responsive to the first excitation source exciting a calibration source. In these implementations, the method also includes (f) adjusting the first gain, the second gain, or both based, at least in part, on the calibration gain.

In yet other implementations, the user interface further enables the user to associate the user-selected gain value with a first of one or more emission labels. The receiving (b) in these implementations includes receiving from the user interface the association of the user-selected gain value with the first emission label. The adjusting (c) and (d) are done when the first emission label is excited in a scanning operation. The method also includes, in other implementations, the additional act of (e) providing a second user interface that enables a user to initiate a scanning operation. In these implementations, the receiving (b) includes (i) receiving the user-selected gain value from the first user interface and storing the user-selected gain value in a memory storage unit, and (ii) retrieving the user-selected gain value from the memory storage unit responsive to the user initiating a scanning operation. The first and second user

interfaces may be the same interface, or may be included as elements of a common, i.e., the same, user interface.

According to other embodiments, a computer program product for adjusting the gain of a scanner is described that, when executed on a computer system, performs a method including (a) receiving one or more user-selected gain values from one or more ranges of gain values (e.g., from one or more slide bars or other user-selectable graphical elements); (b) adjusting the gain of an emission detector of the scanner based, at least in part, on a first of the one or more user-selected gain values (e.g., a slide bar for control of the emission detector gain); and (c) adjusting the gain of a variable gain element of the scanner based, at least in part, on a second of the one or more user-selected gain values (e.g., a slide bar for control of the gain of the variable gain element). The method may also include (d) receiving a calibration gain for a first of the one or more excitation sources, wherein the calibration gain is based, at least in part, on an output of the emission detector responsive to the first excitation source exciting a calibration source; and (e) adjusting the first gain, the second gain, or both based, at least in part, on the calibration gain.


A gain adjustment system in accordance with other embodiments is described. The system includes a scanner that has one or more excitation sources, an emission detector having a first gain, and a variable gain element having a second gain. Also included in the system is a computer-implemented user interface that enables a user to select a user-selected gain value. Also included in the system is scanner control and analysis control logic comprising (i) a user-selected gain data manager that receives the user-selected gain value, and a scan gain controller that adjusts the first gain based, at least in part, on a first portion of the user-selected gain value, and that adjusts the second gain based, at least in part, on a second portion of the user-selected gain value.

According to yet other embodiments, a method is described for adjusting the gain of a scanner. The method includes (a) receiving a user-selected gain value; (b) adjusting the gain of an emission detector of the scanner based, at least in part, on a first portion of the user-selected gain value; and (c) adjusting the gain of a variable gain

element of the scanner based, at least in part, on a second portion of the user-selected gain value.

Various embodiments are also described with respect to auto gain operation. In one such embodiment, a computer program product adjusts the gain of a scanner that
5 has one or more excitation sources, an emission detector having a first gain, and a variable gain element having a second gain. The computer program product, when executed on a computer system, performs a method including: (a) selecting an auto-gain value; (b) adjusting the first gain based, at least in part, on a first portion of the auto-gain value; c) adjusting the second gain based, at least in part, on a second portion of the
10 auto-gain value; (d) causing the scanner to collect a plurality of sample pixel intensity values using the adjusted first and second gains; (e) determining a comparison measure based on comparing one or more of the plurality of sample pixel intensity values to one or more of a plurality of desired pixel intensity values; and (f) adjusting the auto-gain value based on the comparison measure. In these embodiments, acts (b) through (f)
15 may be repeated until the comparison measure reaches an acceptance value or range, or until a number of repetitions exceeds an attempt number. In some implementations, the comparison measure may include a histogram of the plurality of sample pixel intensity values. The comparison measure may also, or alternatively, include a statistical measure.

20 A gain adjustment system is also described that includes a scanner having (i) one or more excitation sources, (ii) an emission detector having a first gain, and (iii) a variable gain element having a second gain. The system also includes scanner control and analysis control logic comprising a scan gain controller. The scan gain controller (i) selects an auto-gain value; (ii) adjusts the first gain based, at least in part, on a first
25 portion of the auto-gain value; (iii) adjusts the second gain based, at least in part, on a second portion of the auto-gain value; (iv) causes the scanner to collect a plurality of sample pixel intensity values using the adjusted first and second gains; (v) determines a comparison measure based on comparing one or more of the plurality of sample pixel intensity values to one or more of a plurality of desired pixel intensity values; and (vi)
30 adjusts the auto-gain value based on the comparison measure.

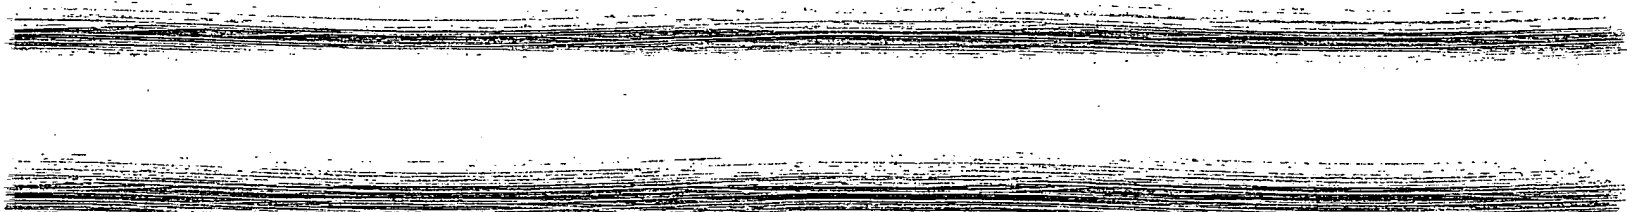

According to yet another embodiment, a method is described for adjusting the gain of a scanner having one or more excitation sources, an emission detector having a first gain, and a variable gain element having a second gain. The method includes (a) selecting an auto-gain value; (b) adjusting the first gain based, at least in part, on a first portion of the auto-gain value; (c) adjusting the second gain based, at least in part, on a second portion of the auto-gain value; (d) causing the scanner to collect a plurality of sample pixel intensity values using the adjusted first and second gains; (e) determining a comparison measure based on comparing one or more of the plurality of sample pixel intensity values to one or more of a plurality of desired pixel intensity values; and (f) adjusting the auto-gain value based on the comparison measure.

Also described in accordance with some embodiments is a method including: (a) receiving a user-selected gain value; (b) applying a first gain to the emission signal based, at least in part, on a first portion of the user-selected gain value; and (c) applying a second gain to the emission signal based, at least in part, on a second portion of the user-selected gain value. A further embodiment is a method for adjusting an emission signal including: (a) selecting an auto-gain value; (b) applying a first gain to the emission signal based, at least in part, on a first portion of the auto-gain value; (c) applying a second gain to the emission signal based, at least in part, on a second portion of the auto-gain value; (d) determining a plurality of sample pixel intensity values based on the emission signal having applied to it the first and second gains; (e) determining a comparison measure based on comparing one or more of the plurality of sample pixel intensity values to one or more of a plurality of desired pixel intensity values; and (f) adjusting the auto-gain value based on the comparison measure.

Also, a computer program product is described in some embodiments that includes a gain-value receiver that receives a user-selected gain value; a first gain controller that applies a first gain to the emission signal based, at least in part, on a first portion of the user-selected gain value; and a second gain controller that applies a second gain to the emission signal based, at least in part, on a second portion of the user-selected gain value. In other embodiments, a computer program product includes an auto-gain value selector; a first gain controller that applies a first gain to the emission

signal based, at least in part, on a first portion of the auto-gain value; a second gain controller that applies a second gain to the emission signal based, at least in part, on a second portion of the auto-gain value; an intensity manager that determines a plurality of sample pixel intensity values based on the emission signal having applied to it the first and second gains; a comparison manager that determines a comparison measure based on comparing one or more of the plurality of sample pixel intensity values to one or more of a plurality of desired pixel intensity values; and an auto-gain adjuster that adjusts the auto-gain value based on the comparison measure.

According to yet another embodiment, a gain adjustment system is described that includes a scanner having one or more excitation sources, an emission detector having a first gain, and a variable gain element having a second gain. The system also includes a scan gain controller that adjusts the first and second gains.

According to another important aspect, the described systems, methods, and computer program products are constructed and arranged for controlled scanning of a substrate area including biological material. According to an embodiment of this aspect, a scanning method includes receiving location data corresponding to a plurality of probe-feature locations on a substrate, storing the location data, accessing the location data, and scanning the substrate based on the accessed location data.

According to some embodiments, a computer program product includes an arrayer manager application and a scanner control application. The arrayer manager application receives and stores location data corresponding to a plurality of probe-feature locations on a substrate. The scanner control application accesses the location data and causes scanning of the substrate based, at least in part, on the accessed location data.

In some implementations, the arrayer manager application and the scanner control application may be separate computer programs, and they may be executed on separate computers. For example, the arrayer manager application may be executed on a first computer that controls an arrayer, and the scanner control application may be executed on a second computer that controls a scanner.

One advantage provided by the computer program product, whether executed on separate computers or a same computer, is that a user wishing to scan a probe array need not provide information regarding the locations of probes on the array's substrate. Rather, the scanner user simply specifies or selects a file or other data storage structure in which the location data has been stored. The user need not be the same user that caused the location data to be stored by specifying probe-feature locations on the substrate. Thus, for example, the scanner user need not be familiar with, or have knowledge of, the scheme for arraying probes on the substrate as determined by the arrayer user. One scanner user may scan arrays prepared by numerous array users. More generally, the arraying and scanning operations may occur at separate places and times as well as involve separate personnel. This flexibility generally simplifies the scanning operation and reduces the possibilities of error in determining appropriate scanning areas on substrates.

In one embodiment, a computer program product is described that includes a user-interface manager. The user interface manager enables user specification of a plurality of probe-feature locations on a substrate, and provides location data corresponding to the probe-feature locations. The computer program product also includes a data storage manager that stores the location data in a memory unit. Yet another element of the product is an output manager enabled to provide the location data to a scanner control application. This scanner control application causes scanning of the substrate based, at least in part, on the accessed location data. The user interface manager may enable user specification of the probe-feature locations by specifying one or more spacing distances between probe features, by specifying one or more patterns of probe feature locations, and/or by specifying coordinates. The coordinates may include x and y coordinates.

In other embodiments, a computer program product is described that includes a data retriever that accesses location data corresponding to a plurality of probe-feature locations on a substrate. The product also has a scan-area controller that controls scanning of the substrate based, at least in part, on the accessed location data. This location data is stored in a memory unit of a first computer that, in some

implementations, controls an arrayer. The data retriever may provide a user interface that enables user selection of the location data, and may access the location data based, at least in part, on the user selection. The data retriever may receive the location data from the first computer and store the location data in a memory unit of a second
5 computer, which may control a scanner. In Some implementations, the probe-feature locations include locations of probes of a spotted array, or of a synthesized array.

In further embodiments, a method is described that includes (a) receiving location data corresponding to a plurality of probe-feature locations on a substrate; (b) storing the location data; (c) accessing the location data; and (d) scanning the substrate
10 based, at least in part, on the accessed location data. Step (a) may include providing a first user interface that enables user specification of the probe feature locations. Step (c) may include (i) providing a second user interface that enables user selection of the location data; and (ii) accessing the location data based, at least in part, on the user selection. In some implementations, step (b) includes storing the location data in an
15 array content file in a memory unit of a first computer, which may control an arrayer. Step (c) in these implementations may include (i) transferring the location data from the first computer to a memory unit of a second computer; (ii) providing a second user interface that enables user selection of the location data; and (iii) accessing the location data from the memory unit of the second computer based, at least in part, on the user
20 selection. The second computer may control a scanner.

According to another embodiment, a scanning method includes (a) accessing location data corresponding to a plurality of probe-feature locations on a substrate, wherein the location data is stored in a memory unit of a computer; and (b) scanning the substrate based, at least in part, on the accessed location data.

25 According to yet another embodiment, a scanning system includes a scanner and a computer program product. The product has a data retriever that accesses location data corresponding to a plurality of probe-feature locations on a substrate, and a scan-area controller that controls scanning by the scanner of the substrate based, at least in part, on the accessed location data.

According to yet another important aspect, the described systems, methods, and computer program products can align multiple images of arrays of biological material.

According to this aspect, an image alignment method includes (a) aligning a grid with a first image; (b) generating grid alignment data based on the alignment of the grid with the first image; (c) storing the grid alignment data in memory; (d) retrieving the grid alignment data responsive to an indication to align a second image; and (e) analyzing the second image based on the retrieved grid alignment data. In some implementations of these methods, the first and second images are generated by scanning a same probe array.

For example, the first image may be generated by scanning the probe array with a first excitation beam having a first wavelength; and the second image may be generated by scanning the probe array with a second excitation beam having a second, different, wavelength. The probe array may be a spotted array, synthesized array, or other type of parallel biological assay. The grid alignment data may be applied to multiple images in addition to the second image. For example, a user may specify that a probe array is to be scanned to provide N images. The grid alignment data is generated based on the alignment of a grid with a first of the N images, and this grid alignment data is applied to each of the other N images.

One advantage of this method in some embodiments is that grid alignment need not (although it may) be performed on images other than the first image. Also, grids need not (but may) be displayed for those other images. Rather, in some implementations, alignment data based on aligning a grid with a first image is stored and may be retrieved and applied to other images. This application to other images thus, in some aspects of these implementations, may take place without user involvement, or merely in accordance with a user indication to analyze the other images.

In some implementations, the methods may further include (f) receiving one or more user-selected grid aligning parameters. The user-selected grid aligning parameters may include a fixed algorithm shape with easy threshold, a fixed algorithm shape with tight threshold, a variable algorithm shape with easy threshold, a variable algorithm

shape with tight threshold, an estimated feature size, and/or any combination thereof. The estimated feature size may be based on a dimension of a depositing element.

Some implementations of these methods include receiving a user selection of a number of images to scan and scanning the user-selected number of images. Also, the method may include receiving a user selection of one or more parameters for scanning, such as a gain for one or more of the user-selected number of images, and/or an indicator of an excitation source for one or more of the user-selected number of images.

In accordance with other embodiments, a computer program product is described that includes a grid aligner that aligns a grid with a first image. The product also has an image analysis manager that has an image analyzer, an image analysis data storer, and a multiple scan alignment controller. The image analyzer generates grid alignment data based on the alignment of the grid with the first image. The image analysis data storer stores the grid alignment data in memory. The multiple scan alignment controller retrieves the grid alignment data responsive to an indication to analyze (or align) a second image. The image analyzer analyzes the second image based on the retrieved grid alignment data. This analysis typically involves identification and categorization of pixels for analysis based on the grid alignment data. In this sense, it may be said that the image analyzer applies a grid (based on analysis of the first image) to other images. The computer program product may also have a GUI manager that receives one or more user-selected grid aligning parameters.

In accordance with yet other embodiments, a scanning system is described that includes a scanner and a computer program product. The scanner scans a first probe array to generate first and second (or more) images. The computer program product includes a grid aligner that aligns a grid with the first image, and an image analysis manager. The image analysis manager has an image analyzer that generates grid alignment data based on the alignment of the grid with the first image, an image analysis data storer that stores the grid alignment data in memory, and a multiple scan alignment controller that retrieves the grid alignment data responsive to an indication to align the second image. The image analyzer analyzes the second image based on the

retrieved grid alignment data. The images may be collected from the same probe array or from different probe arrays.

The above aspects, embodiments and implementations are not necessarily inclusive or exclusive of each other and may be combined in any manner that is non-conflicting and otherwise possible, whether they be presented in association with a same, or a different, aspect of the invention. The description of one embodiment or implementation is not intended to be limiting with respect to other embodiments or implementations. Also, any one or more function, act, step, operation, or technique described elsewhere in this specification may, in alternative embodiments or implementations, be combined with any one or more function, step, operation, or technique described in the summary. Thus, the above embodiments and implementations are illustrative rather than limiting.

BRIEF DESCRIPTION OF THE DRAWINGS

The above and further features will be more clearly appreciated from the following detailed description when taken in conjunction with the accompanying drawings.

Figure 1 is a simplified schematic diagram of one embodiment of networked systems for generating, sharing, and processing probe array data among computers on a network, including an arrayer system for generating spotted probe arrays and scanner systems for scanning spotted and synthesized probe arrays.

Figure 2 is a functional block diagram of one embodiment of a user computer of the networked computers of Figure 1 suitable for controlling the arrayer of Figure 1 to produce spotted arrays.

Figure 3A is a graphical representation of data records in one embodiment of a data file suitable for storing data regarding spotted arrays produced in cooperation with the user computer of Figure 2 and the arrayer of Figure 1.

Figure 3B is a graphical representation of a microscope slide including illustrative embodiments of spotted arrays produced in cooperation with the user computer of Figure 2 and the arrayer of Figure 1.

Figure 4 is a simplified graphical representation of selected components of one embodiment of a scanner of Figure 1 suitable for scanning arrays.

Figure 5A is a perspective view of a simplified exemplary configuration of a scanning arm portion of the scanner of Figure 4.

5 Figure 5B is a top planar view of the scanning arm of Figure 5A as it scans biological features on one embodiment of a spotted array being moved by a translation stage under the arm's arcuate path.

Figure 6A is a graphical representation of one embodiment of a probe feature showing bi-directional scanning lines such as may be implemented using the scanning arm of Figures 5A and 5B.

10 Figure 6B is an illustrative plot of pixel clock pulses aligned with the scanned probe feature of Figure 6A to show illustrative radial position sampling points.

Figure 6C is an illustrative plot of sampled analog emission voltages aligned with the pixel clock pulses of Figure 6B.

15 Figure 6D is an illustrative plot of digital emission voltages corresponding to the analog emission voltages of Figure 6C, including saturated values.

Figure 7 is a functional block diagram of one embodiment of a scanner system of Figure 1.

Figure 8 is a simplified functional block diagram of selected elements of the scanner system of Figure 7 comprising illustrative gain adjustment systems.

20 Figure 8A is functional block diagram of one embodiment of a scanner control and analysis application (e.g., computer program product);

Figure 8B is functional block diagram of another embodiment of a scanner control and analysis application (e.g., computer program product).

25 Figure 9 is an illustrative implementation of one embodiment of a graphical user interface of the gain adjustment systems of Figure 8.

Figure 9A is an illustrative implementation of a graphical user interface employed in cooperation with the application of Figure 8A to retrieve probe-feature location data.

Figure 9B is another illustrative implementation of another graphical user interface employed in cooperation with the application of Figure 8A to retrieve probe-feature location data.

Figure 10 is a graphical representation of one embodiment of a distribution of calibration and user-selected gain controls applied to an emission detector and a variable gain element of the gain adjustment systems of Figure 8.

Figure 11 is a functional block diagram of one embodiment of a scanner control and analysis application of the gain adjustment systems of Figure 8.

Figure 11A is a flow diagram showing steps implemented by illustrative embodiments of the application of Figure 8A and an illustrative arrayer manager application of Figure 2.

Figures 12A, 12B, and 12C are flow charts of illustrative method steps for respectively storing calibration gain data, storing user-selected gain data, and implementing calibration and user-selected gain adjustments.

Figure 13 is a flow chart of illustrative method steps by which the gain adjustment systems of Figure 8 may determine, allocate, and apply gains.

Figure 14 is a flow chart showing in greater detail illustrative method steps directed to determining an automatic gain adjustment value, as generally shown in Figure 13.

Figure 15 is a functional block diagram of one embodiment of a scan gain controller by which the gain adjustment systems of Figure 8 may automatically determine, allocate, and apply gains.

Figure 16 is an illustrative implementation of another graphical user interface employed in cooperation with the application of Figure 8B to receive user commands to span N number of multiple images.

Figures 16A and 16B are graphical representations of scanned images showing the application of a grid and of user-specified grid parameter data.

Figure 16C is a flow diagram showing steps implemented by illustrative embodiments of the application of Figure 8B.

In the drawings, like reference numerals indicate like structures or method steps. In functional block diagrams, rectangles generally indicate functional elements, parallelograms generally indicate data, and rectangles with a pair of double borders generally indicate predefined functional elements. In method flow charts, rectangles
5 generally indicate method steps and diamond shapes generally indicate decision elements. All of these conventions, however, are intended to be typical or illustrative, rather than limiting.

DETAILED DESCRIPTION

Systems, methods, and software products to acquire, process, analyze, and/or
10 display data from experiments with synthesized and/or spotted arrays are described herein with respect to illustrative, non-limiting, implementations. Various other alternatives, modifications and equivalents are possible. For example, while certain systems, methods, and computer software products are described using exemplary embodiments with reference to spotted arrays analyzed using Affymetrix® scanners
15 and/or Affymetrix software, the systems, methods, and products of the present invention are not so limited. For example, they generally may be applied with respect to many other probe arrays, including many types of parallel biological assays.

Probe Arrays

For example, certain systems, methods, and computer software products are
20 described herein using exemplary implementations for acquiring, analyzing, and/or displaying data from arrays of biological materials produced by the Affymetrix® 417™ or 427™ Arrayer. Other illustrative implementations are referred to in relation to data from experiments with Affymetrix® GeneChip® arrays. However, these systems, methods, and products may be applied with respect to many other types of probe arrays
25 and, more generally, with respect to numerous parallel biological assays produced in accordance with other conventional technologies and/or produced in accordance with techniques that may be developed in the future. For example, aspects of the systems, methods, and products described herein may, in some implementations, be applied to parallel assays of nucleic acids, PCR products generated from cDNA clones, proteins,
30 antibodies, or many other biological materials. These materials may be disposed on

slides (as typically used for spotted arrays), on substrates employed for GeneChip® arrays, or on beads, optical fibers, or other substrates, supports, or media (all or any of which may hereafter generally and collectively be referred to as "substrates"). Some implementations of synthesized arrays, their preparation, substrates, and the like are
5 described in U.S. Patents Nos. 5,744,305 and 5,445,934, which are hereby incorporated herein by reference in their entireties for all purposes. Moreover, with respect to some implementations in which the context so indicates or allows, the probes need not be immobilized in or on a substrate, and, if immobilized, need not be disposed in regular patterns or arrays. For convenience, the term "probe array" will generally be used
10 broadly hereafter to refer to all of these types of arrays and parallel biological assays.

For convenience, an array made by depositing or positioning pre-synthesized or pre-selected probes on a substrate, or by depositing/positioning techniques that may be developed in the future, is hereafter referred to as a "spotted array." Typically, but not necessarily, spotted arrays are commercially fabricated on microscope slides. These
15 arrays often consist of liquid spots containing biological material of potentially varying compositions and concentrations. For instance, a spot in the array may include a few strands of short polymers, such as oligonucleotides in a water solution, or it may include a high concentration of long strands of polymers, such as complex proteins. The Affymetrix® 417™ and 427™ Arrayers, noted above, are devices that deposit densely
20 packed arrays of biological material on a microscope slide in accordance with these techniques. Aspects of these, and other, spot arrayers are described in U.S. Patents Nos. 6,121,048, 6,040,193 and 6,136,269, in PCT Applications Nos. PCT/US99/00730 (International Publication Number WO99/36760) and PCT/US 01/04285, in U.S. Patent Applications Serial Nos. 09/122,216, 09/501,099, and 09/862,177, and in U.S.
25 Provisional Patent Application Serial No. 60/288,403, all of which are hereby incorporated by reference in their entireties for all purposes. Other techniques for depositing or positioning biological probes on a substrate, *i.e.*, creating spotted arrays, also exist. For example, U.S. Patent No. 6,040,193 to Winkler, et al. is directed to processes for dispensing drops of biological material. The '193 patent, and U.S. Patent
30 No. 5,885,837 to Winkler, also describe separating reactive regions of a substrate from

each other by inert regions and spotting on the reactive regions. The '193 and '837 patents are hereby incorporated by reference in their entireties. Other techniques for producing spotted arrays are based on ejecting jets of biological material. Some implementations of the jetting technique use devices such as syringes or piezo electric pumps to propel the biological material.

Spotted arrays typically are used in conjunction with tagged biological samples such as cells, proteins, genes or EST's, other DNA sequences, or other biological elements. These samples, referred to herein as "targets," typically are processed so that they are spatially associated with certain probes in the probe array. In one non-limiting implementation, for example, one or more chemically tagged biological samples, i.e., the targets, are distributed over the probe array. Some targets hybridize with at least partially complementary probes and remain at the probe locations, while non-hybridized targets are washed away. These hybridized targets, with their "tags" or "labels," are thus spatially associated with the targets' complementary probes. The associated probe and target may sometimes be referred to as a "probe-target pair." Detection of these pairs can serve a variety of purposes, such as to determine whether a target nucleic acid has a nucleotide sequence identical to or different from a specific reference sequence. See, for example, U.S. Patent No. 5,837,832 to Chee, et al. Other uses include gene expression monitoring and evaluation (see, e.g., U.S. Patent No. 5,800,992 to Fodor, et al.; U.S. Patent No. 6,040,138 to Lockhart, et al.; and International App. No. PCT/US98/15151, published as WO99/05323, to Balaban, et al.), genotyping (U.S. Patent No. 5,856,092 to Dale, et al.), or other detection of nucleic acids. The '832, '992, '138, and '092 patents, and publication WO99/05323, are incorporated by reference herein in their entirety for all purposes.

To ensure proper interpretation of the term "probe" as used herein, it is noted that contradictory conventions exist in the relevant literature. The word "probe" is used in some contexts to refer not to the biological material that is deposited on a substrate, as described above, but to what has been referred to herein as the "target." To avoid confusion, the term "probe" is used herein to refer to compounds such as those deposited on a substrate to create spotted arrays.

Figure 1 is a simplified schematic diagram of illustrative systems for generating, sharing, and processing data derived from experiments using probe arrays (*i.e.*, spotted arrays and/or synthesized arrays). More particularly, an illustrative arrayer system 148 and illustrative scanner systems 150A and 150B (collectively, scanner systems 150) are shown. In this example, data may be communicated among user computer 100A of system 148, user computers 100B and 100C of systems 150, and Laboratory Information Management (LIMS) server 120 over network 125. LIMS server 120 and associated software generally provides data capturing, tracking, and analysis functions from a centralized infrastructure. Aspects of a LIMS are described in U.S. Provisional Patent Application Nos. 60/220,587 and 60/273,231, both of which are hereby incorporated by reference herein for all purposes. LIMS server 120 and network 125 are optional, and the systems in other implementations may include a scanner for spotted arrays and not synthesized arrays, or vice versa. Also, rather than employing separate user computers 100A and 100B to operate and process data from an arrayer and scanner, respectively, as in the illustrated implementation, a single computer may be used for all of these purposes in other implementations. More generally, a large variety of computer and/or network architectures and designs may be employed, and it will be understood by those of ordinary skill in the relevant art that many components of typical computer network systems are not shown in Figure 1 for sake of clarity.

20

Arrayer 120

The illustrative system of Figure 1 includes an arrayer 120 for producing spotted arrays, such as represented by spotted arrays 121. For example, arrayer 120 may be the Affymetrix® 417™ or 427™ Arrayer (commercially available from Affymetrix, Inc. of Santa Clara, California), elements of which are hereafter described to provide an example of how arrayer 120 may operate in a commercial embodiment. As noted above, however, numerous variations are possible in the technologies and structures that may be used to produce spotted arrays, and thus it will be understood that the following description of arrayer 120 is merely illustrative, and is non-limiting.

Arrayer 120 of the illustrated implementation deposits spots on substrates consisting of standard glass microscope slides. The slides are held on a flat platen or

30

cartridge (not shown) that registers the slides relative to a printing head (not shown) that is lowered and raised to effect spotting. The spotting elements of the printing head may include, for example, various numbers of Affymetrix® Pin-and-Ring™ mechanisms, as described, e.g., in U.S. Patent Application, Serial No. 09/862,177, or U.S. Provisional

5 Patent Application Serial No. 60/288,403, incorporated by reference above. For example, the printing head in illustrative implementations may accommodate 1, 4, 8, 12, 32 or 48 pairs of pin and ring elements to deposit the spots of biological material onto the slide. Arrayer 120 thus may in some implementations be capable of rapidly depositing many spots of biological fluids, such as would be useful in preparing large

10 numbers of DNA microarrays. The ring of the Pin-and-Ring™ mechanism in one implementation includes a circular ring section formed from a circular piece of metal. The ring is attached at the end of an arm section that extends from a cylinder. The pin in this example is a single, rod-like device having at one end a very narrow tip. During operation, the pin is inserted into and through the cylinder with the tip being capable of

15 moving freely through the opening of the ring.

In some implementations, fluids to be spotted onto the microscope slides may be stored in and retrieved from well plates (also commonly referred to as microtiter plates) having, for example a standard number of 96 or 348 wells. The well plates loaded with fluids may, in some implementations, be inserted by a user into a carousel included in

20 arrayer 120. Arrayer 120 may include a robotic system having an effector arm that, under computer control, may be instructed to retrieve a well plate from the carousel. Arrayer 120 may, in some implementations, be capable of automatically identifying well plates. For example, machine-readable indicators, e.g., bar codes, may be attached to the well plates and a bar code reader may be attached to the robotic system for

25 reading the bar codes. The robotic system pivots the retrieved well plate from the carousel to a well plate retainer on the platen. In other implementations, a user may manually place slides on the platen.


Arrayer 120 further includes a robotic system that may be instructed, under computer control, to position the printing head with respect to the well plate in the well

30 plate retainer in order to obtain fluids from the well plate for spotting. For example, as

described in U.S. Patent Application, Serial No. 09/862,177, referred to above, rings of the printing head may be lowered into the wells of the well plate while the pins of the printing head remain out of contact with the fluids. The ring section is then raised out of the fluids. Given the design of the rings, an amount of the fluid is retained within the
5 rings by the surface tension of the fluid and the surface activity of the inner walls of the rings. After the rings are raised out of the sample solution, the fluid held in each ring forms a convex meniscus that protrudes from the bottom opening of the ring. The printing head, including the rings with fluids, can then be positioned at a location above a substrate (i.e., microscope slide in this example) onto which a fraction of the fluid in
10 each ring is to be deposited. The fluid volume in the ring is sufficient to deposit or spot more than one fraction. In fact, several hundred to a thousand or more fractions can be deposited from a single fluid volume retained in a ring. The number of fractions will depend on the desired volume of each fraction, the dimensions of the pin and the viscosity of the fluid.

15 Once the pin and ring mechanism is position over the desired location on the substrate, the tip of the pin is then lowered into, through and out of the fluid retained in the ring. The surface tension of the fluid retains the fluid within the ring while the pin penetrates into and moves through and out of the fluid. A fraction of the fluid is retained on the tip of the pin forming a meniscus. The portion of the pin that passes
20 through the ring has a diameter that typically is small compared to the diameter of the ring, enabling the pin to pierce the fluid without breaking the meniscus and causing the fluid to leave the ring.

 The pin with the fluid on the tip is lowered toward the surface of the substrate until the meniscus of the fluid on the end of the pin makes initial contact with the
25 surface of the substrate. During typical operation, the pin contacts the substrate without damaging force. The fluid then adheres via surface tension to the surface of the substrate, and as the pin is raised, the fluid is transferred to the surface of the substrate by surface tension and gravity. The pin is moved back through and above the fluid in the ring. The process of sample deposition can then be repeated by repositioning the pin

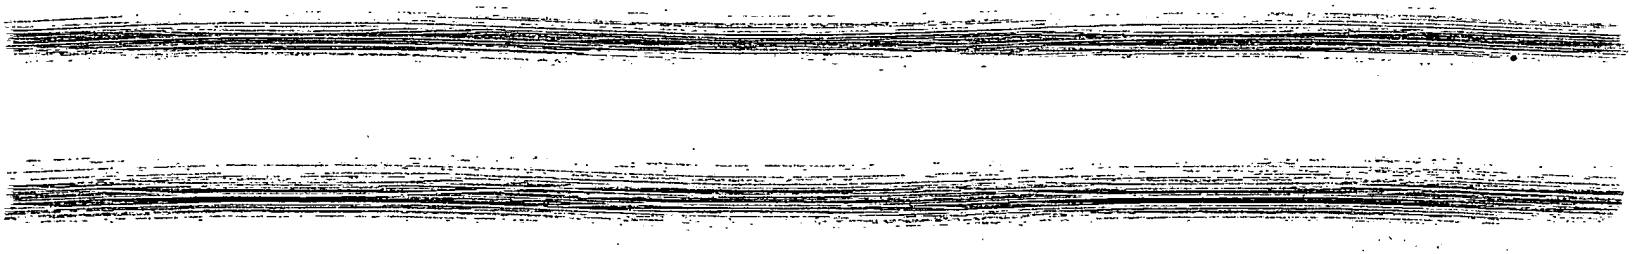

and ring mechanism at another desired location above the surface of the substrate. Alternatively, the pin and ring can be positioned over another, different surface.

In this exemplary implementation, the printing head is positioned on an x-y gantry that is capable of moving the printing head across the length and width of the platen, and thus over numerous slides retained on the platen. For example, the printing head may move in a serpentine manner from slide to slide along a column of slides arranged on the platen, and then back along an adjacent column of slides on the platen. The movement of the printing head may be controlled in accordance with various techniques such as using sensors to count markers and arrive at a preprogrammed destination. The printing head may optionally be directed under computer control to wash and dry stations to clean the pins and rings between spotting applications.

User Computer 100A

As shown in Figure 1 and noted above, arrayer 120 operates in the illustrated implementation under computer control, e.g., under the control of user computer 100A. Although computer 100A is shown in Figure 1 for clarity as being directly coupled to arrayer 120, it may alternatively be coupled to arrayer 120 over a local-area, wide-area, or other network, including an intranet and/or the Internet.

Figure 2 is a functional block diagram showing an illustrative implementation of computer 100A. Computer 100A may be a personal computer, a workstation, a server, or any other type of computing platform now available or that may be developed in the future. Typically, computer 100A includes known components such as processor (e.g., CPU) 205, operating system 210, system memory 220, memory storage devices 225, graphical user interface (GUI) controller 215, and input-output controllers 230, all of which typically communicate in accordance with known techniques such as via system bus 204. It will be understood by those skilled in the relevant art that there are many possible configurations of the components of computer 100A and that some components that may typically be included in computer 100A are not shown, such as cache memory, a data backup unit, and many other devices.

Input-output controllers 230 could include any of a variety of known devices for accepting and processing information from a user, whether a human or a machine.

whether local or remote. Such devices include, for example, modem cards, network interface cards, sound cards, or other types of controllers for any of a variety of known input devices. Output controllers of input-output controllers 230 could include controllers for any of a variety of known display devices for presenting information to a user, whether a human or a machine, whether local or remote. If one of these display devices provides visual information, this information typically may be logically and/or physically organized as an array of picture elements, sometimes referred to as pixels. GUI controller 215 may comprise any of a variety of known or future software programs for providing graphical input and output interfaces between computer 100A and a user 201 (e.g., an experimenter wishing to use arrayer 120 to generate spotted arrays), and for processing inputs from user 201 (hereafter sometimes referred to as user inputs or user selections).

Arrayer Manager Application 290

Arrayer manager application 290 of the illustrated implementation is a software application that controls functions of arrayer 120 and processes data supplied by user 201. As more particularly described with respect to certain implementations in U.S. Provisional Patent Application Serial No. 60/288,403, incorporated by reference above, application 290, when executed in coordination with processor 205, operating system 210, and/or GUI controller 215, performs user interface functions, data processing operations, and data transfer and storage operations. For example, with respect to user interface functions, user 201 may employ one or more of GUI's 282 to specify and describe particular clones and their location in particular wells of particular well plates. Using another of GUI's 282, user 201 may specify how spots of the clones are to be arranged in arrays on one or more slides. Yet another of GUI's 282 may be used to operate arrayer 120, e.g., to initiate the spotting of a number of slides without further user participation.

As will be evident to those skilled in the relevant art, application 290 may be loaded into system memory 220 and/or memory storage device 225 through an input device of devices 280. Alternatively, application 290 may be implemented as executable instructions stored in firmware. Executable code corresponding to

application 290 is referred to as arrayer manager application executable 290' and is shown for convenience with respect to the illustrated implementation as stored in system memory 220. However, instructions and data including executable instructions of application 290, and data used or generated by it, may be located in or shifted among
5 other memory devices, local or remote, as convenient for data storage, data retrieval, and/or execution.

Figure 3A is a graphical representation of illustrative data records in one implementation of a data file generated by arrayer manager application executable 290'. The data file in this illustration, referred to as array content file 292, consists of records
10 301, each one of which (i.e., records 301A through 301N for any number of N records) corresponds to one of N spots, i.e., probes, that have been deposited, or are planned to be deposited, on spotted arrays 121. For example, with reference to the graphical representation of spotted arrays 121 shown in Figure 3B, two arrays 121A and 121B (collectively, arrays 121) have been printed on microscope slide substrate 333 by
15 arrayer 120. Array 121A includes probe 370A. It is assumed for purposes of illustration that data relating to probe 370A is stored by executable 290' in probe record 301A. In this example, each of the records in file 292 includes the following illustrative fields: probe identifier(s) 302, probe x-coordinate identifier(s) 304, probe y-coordinate identifier(s) 306, probe data 308, probe data links 310, pin identifier 312, well plate
20 identifier 316, and user-supplied data 320.

The field in record 301A labeled probe identifier(s) 302A thus, in this example, includes certain information related to the identification of probe 370A. For instance, field 302A may include a name for cDNA deposited by a pin of arrayer 120 in array 121A to produce probe 370A. In various implementations, field 302A may also, or in
25 addition, include a nucleotide identifier and/or a gene symbol that identifies probe 370A. Also, field 302A may include a build or release number of a database so that the data source used to develop the probe can be identified. As yet another example of information that may be included in field 302A, a probe may be identified as either an original or as a replicate. For instance, for quality control or other reasons, probe 370B
30 of array 121A may be the same probe as probe 370A, or a number of such replicate

probes may be deposited. The designation of original or replicate number assists in comparing results from probes that are based on the same sample. As one of ordinary skill in the relevant art will readily appreciate, all or some of this identifying data may be stored as a single value in field 302A (such as, for example, concatenating name, nucleotide identifier, etc.), in separate fields (e.g., 302A', 302A", etc., not shown), in linked fields, and so on as may be convenient for data storage and/or processing. The other fields described below similarly are only representative of many possible storage and data retrieval architectures.

Field 308A, labeled probe data in this example, may include probe-related data such as the chromosome location of the gene or EST represented by the probe, the band location on the chromosome, a SNP or other type of marker that can identify the location on the chromosome, and so on. Field 310A, labeled probe data links in this example, similarly may include an accession number from GenBank, a UniGene cluster number, and/or another identifier that facilitates access to data related to probe 370A that is stored in a database. This database may, but need not, be external to computer 100A and accessed via network 125 and/or the Internet or other network. Systems for providing access to such information are described, for example, in U.S. Provisional Patent Application, Serial No. 60/288,429, hereby incorporated herein by reference in its entirety. Field 312A of this example identifies the pin on the print head(s) that is used to deposit probe 370A onto the slide. This information may be useful in comparing probes deposited with the same pin to determine, for example, if the pin is defective. Fields 314A and 316A contain information that respectively identifies the well plate and particular well from which biological fluid was taken to create probe 370A. Field 320A may contain a variety of data supplied by user 201 such as the user's name, the data of the experiment, and so on. It will be understood that there are many other types of data relating to probe 370A that may be stored, and that numerous alternative arrangements may be implemented for storing them.

Fields 304A and 306A are used to identify the location of probe 370A on the slide in x and y coordinates, respectively. It will be understood that other coordinate systems (e.g., radial system) could be used, and that the definition of the orientation and

zero points of the coordinate references of the present example are illustrative only. In one implementation of the present example, field 304A could include primary and secondary row coordinates, and field 306A could include primary and secondary column coordinates, that identify the position of probe 370A.

5 For instance, arrays 121A and 121B could be viewed as arranged in a single primary column (disposed horizontally in Figure 3B) in which array 121A occupies the first primary row and array 121B occupies the second primary row. Such an implementation may be said to involve relative, rather than absolute, locations because locations of probes are specified in relation to each other rather than in relation to a
10 reference point on the substrate. It may be advantageous in some implementations to specify absolute, rather than relative, locations. In one such implementation, orthogonal x and y axes could be defined in relation to the sides of the microscope slide, such as x axis 392 and y axis 394 of the illustrated example, with the 0,0 reference coordinates defined with reference to a particular point on the slide. For instance, some slides are
15 manufactured with a frosted area, such as area 380 of this example, so that a user may more easily label or write on the slide, or for other reasons. A particular point at a corner of the frosted area could readily be defined as the reference coordinate, or any of various other methods could be used to specify a reference coordinate on, or spatially related to, a point on the substrate.

20 It may be advantageous in some implementations to specify absolute, rather than relative, locations. In one such implementation, orthogonal x and y axes could be defined in relation to the sides of the microscope slide, such as x axis 392 and y axis 394 of the illustrated example, with the 0,0 reference coordinates defined with reference to a particular point on the slide. For instance, some slides are manufactured with a
25 frosted area, such as area 380 of this example, so that a user may more easily label or write on the slide, or for other reasons. A particular point at a corner of the frosted area could readily be defined as the reference coordinate, or any of various other methods could be used to specify a reference coordinate on, or spatially related to, a point on the substrate.

User 201 could thus, using for example one of GUI's 282, specify that the position of probe 370A should be 0.3 millimeters along x axis 392 and 3.0 millimeters along y axis 394. This specification could be accomplished, for example, by specifying where probe 370A is to be located in reference to the reference coordinate. Assuming a
5 spacing between probes of 300 microns, probe 370B of the example illustrated in Figure 3B would thus be positioned at x, y coordinates of 0.6 millimeters, 3.0 millimeters. In some implementations, user 201 could specify the spacing between probes (e.g., probes are to be located 300 microns from each other in both the x and y directions). In further implementations, user 201 could specify the locations of a subset, or all of, the probes
10 by specifying coordinates of each of the subset, or of all, of the probes in relation to a reference coordinate on the substrate. In yet other non-limiting illustrative implementations, user 201 could specify various probe array patterns such as ones in which a probe array is replicated on a same substrate at a specified x and y distance from the original probe array, or in which the rows or columns of an original and
15 replicate probe array are interleaved with each other. In such implementations, user 201 may hereafter be referred to as specifying one or more patterns of probe feature locations. Various combinations of each of the preceding techniques, and/or others, may also be used.

In some implementations, a printing head of arrayer 120 may include multiple
20 pins, quills, ink-jets, or other elements for depositing probes, and these devices may be positioned at fixed positions with respect to each other. Thus, assuming multiple elements deposit probes at each printing operation, the locations of some probes may be determined in part by the fixed positions rather than solely by the user. In other implementations, such as for example when a single printing element is used or printing
25 element positions are variable, user 201 may have freedom to specify a location for each probe in one or more probe arrays.

Probe location information such as stored in records 304 and 306 of file 292, as well as other information in that file, may be stored, as noted, in system memory 220 of user computer 100A, and may also be shared or distributed among other computers on
30 network 125 or elsewhere. In particular, it is illustratively assumed for purposes of the

present examples that the data in file 292, referred to as array content data 292', is transferred over network 125 to user computer 100B, described below.

Scanner 160A: Optics and Detectors

Any of a variety of conventional techniques, or ones to be developed in the future, may be used to generate probe-target pairs in probe arrays that may be detected using a scanner. As one illustrative example that will be familiar to those of ordinary skill in the relevant art, conventional fluidics stations, hybridization chambers, and/or various manual techniques (as, for example, generally and collectively represented by hybridization process 122 in Figure 1) may be used to apply one or more labeled targets to spotted arrays on microscope slides. In a particular implementation, for instance, sample of a first target may be labeled with a first dye (an example of what may more generally be referred to hereafter as an "emission label") that fluoresces at a particular characteristic frequency, or narrow band of frequencies, in response to an excitation source of a particular frequency. A second target may be labeled with a second dye that fluoresces at a different characteristic frequency. The excitation source for the second dye may, but need not, have a different excitation frequency than the source that excites the first dye, e.g., the excitation sources could be the same, or different, lasers. The target samples may be mixed and applied to the probes of spotted arrays on microscope slides, and conditions may be created conducive to hybridization reactions, all in accordance with known techniques. In accordance with other techniques, such as typically are applied with respect to Affymetrix® GeneChip® synthesized arrays, samples of one labeled target are applied to one array and samples of a second labeled target are applied to a second array having the same probes as the first array. Hybridization techniques are applied to both arrays. For example, synthesized arrays 134 of Figure 1 may be illustratively assumed to be two GeneChip® synthesized arrays that have been subject to hybridization processes with respect to two different target samples, each labeled with different fluorescent dyes. See, e.g., U.S. Patent No. 6,114,122, which is hereby incorporated by reference herein in its entirety.

Many scanner designs may be used to provide excitation signals to excite labels on targets or probes, and to detect the emission signals from the excited labels. In

references herein to illustrative implementations, the term "excitation beam" may be used to refer to light beams generated by lasers to provide the excitation signal.

However, excitation sources other than lasers may be used in alternative implementations. Thus, the term "excitation beam" is used broadly herein. The term

5 "emission beam" also is used broadly herein. As noted, a variety of conventional scanners detect fluorescent or other emissions from labeled target molecules or other material associated with biological probes. Other conventional scanners detect transmitted, reflected, or scattered radiation from such targets. These processes are sometimes generally and collectively referred to hereafter for convenience simply as
10 involving the detection of "emission beams." The signals detected from the emission beams are generally referred to hereafter as "emission signals" and this term is intended to have a broad meaning commensurate with that intended herein for the term "emission beams."

Various detection schemes are employed depending on the type of emissions
15 and other factors. A typical scheme employs optical and other elements to provide an excitation beam, such as from a laser, and to selectively collect the emission beams. Also generally included are various light-detector systems employing photodiodes, charge-coupled devices, photomultiplier tubes, or similar devices to register the collected emission beams. For example, a scanning system for use with a fluorescently
20 labeled target is described in U.S. Pat. No. 5,143,854, hereby incorporated by reference in its entirety for all purposes. Other scanners or scanning systems are described in U.S. Patent Nos. 5,578,832, 5,631,734, 5,834,758, 5,936,324, 5,981,956, 6,025,601, 6,141,096, 6,185,030, 6,201,639, 6,218,803, and 6,252,236; in PCT Application PCT/US99/ 06097 (published as WO99/47964); and in from U.S. Patent Applications
25 09/682,071; 09/682,074; and 09/682,076 all of which were filed on July 17, 2001, each of these patent documents is hereby incorporated by reference in their entireties for all purposes.

Figure 4 is a simplified graphical representation of selected components of an illustrative type of scanner 160A suitable for scanning hybridized spotted arrays 132A
30 and 132B disposed on slide 333 (i.e., in this example, spotted arrays 121A and 121B,

respectively, after hybridization process 122). These illustrative components, which will be understood to be non-limiting and not exhaustive, are referred to collectively for convenience as scanner optics and detectors 400. Scanner optics and detectors 400 include excitation sources 420A and 420B (collectively referred to as excitation sources 5 420). Any number of one or more excitation sources 420 may be used in alternative embodiments. In the present example, sources 420 are lasers; in particular, source 420A is a diode laser producing red laser light having a wavelength of 635 nanometers and , source 420B is a doubled YAG laser producing green laser light having a wavelength of 532 nanometers. Further references herein to sources 420 generally will 10 assume for illustrative purposes that they are lasers, but, as noted, other types of sources, *e.g.*, x-ray sources, may be used in other implementations.

Sources 120A and 120B may alternate in generating their respective excitation beams 435A and 435B between successive scans, groups of successive scans, or between full scans of an array. Alternatively, both of sources 120 may be operational at 15 the same time. For clarity, excitation beams 435A and 435B are shown as distinct from each other in Figure 4. However, in practice, turning mirror 424 and/or other optical elements (not shown) typically are adjusted to provide that these beams follow the same path.

Scanner optics and detectors 400 also includes excitation filters 425A and 425B 20 that optically filter beams from excitation sources 420A and 420B, respectively. The filtered excitation beams from sources 420A and 420B may be combined in accordance with any of a variety of known techniques. For example, one or more mirrors, such as turning mirror 424, may be used to direct filtered beam from source 420A through beam combiner 430. The filtered beam from source 420B is directed at an angle incident 25 upon beam combiner 430 such that the beams combine in accordance with optical properties techniques well known to those of ordinary skill in the relevant art. Most of combined excitation beams 435 are reflected by dichroic mirror 436 and thence directed to periscope mirror 438 of the illustrative example. However, dichroic mirror 436 has characteristics selected so that portions of beams 435A and 435B, referred to 30 respectively as partial excitation beams 437A and 437B and collectively as beams 437,

pass through it so that they may be detected by excitation detector 410, thereby producing excitation signal 494.

In the illustrated example, excitation beams 435 are directed via periscope mirror 438 and arm end turning mirror 442 to an objective lens 445. As shown in
5 Figures 5A and 5B, lens 445 in the illustrated implementation is a small, light-weight lens located on the end of an arm that is driven by a galvanometer around an axis perpendicular to the plane represented by galvo rotation 449 shown in Figure 4. Objective lens 445 thus, in the present example, moves in arcs over hybridized spotted arrays 132 disposed on slide 333. Fluorophores in hybridized probe-target pairs of
10 arrays 132 that have been excited by beams 435 emit emission beams 452 (beam 452A in response to excitation beam 435A, and beam 452B in response to excitation beam 435B) at characteristic wavelengths in accordance with well-known principles. Emission beams 452 in the illustrated example follows the reverse path as described with respect to excitation beams 435 until reaching dichroic mirror 436. In accordance
15 with well-known techniques and principles, the characteristics of mirror 436 are selected so that beams 452 (or portions of them) pass through the mirror rather than being reflected.

In the illustrated implementation, filter wheel 460 is provided to filter out spectral components of emission beams 452 that are outside of the emission band of the
20 fluorophore, thereby providing filtered beams 454. The emission band is determined by the characteristic emission frequencies of those fluorophores that are responsive to the frequencies of excitation beams 435. In accordance with techniques well known to those of ordinary skill in the relevant arts, including that of confocal microscopy, filtered beams 454 may be focused by various optical elements such as lens 465 and
25 also passed through illustrative pinhole 467 or other element to limit the depth of field, and thence impinges upon emission detector 415.

Emission detector 415 may be a silicon detector for providing an electrical signal representative of detected light, or it may be a photodiode, a charge-coupled device, a photomultiplier tube, or any other detection device that is now available or that
30 may be developed in the future for providing a signal indicative of detected light. For

convenience of illustration, detector 415 will hereafter be assumed to be a photomultiplier tube (PMT). Detector 415 thus generates emission signal 492 that represents numbers of photons detected from filtered emission beam 454.

Figure 5A is a perspective view of a simplified representation of the scanning arm portion of scanner optics and detectors 400. Arm 500 moves in arcs around axis 510, which is perpendicular to the plane of galvo rotation 449. A position transducer 515 is associated with galvanometer 515 that, in the illustrated implementation, moves arm 500 in bi-directional arcs. Transducer 515, in accordance with any of a variety of known techniques, provides an electrical signal indicative of the radial position of arm 500. Certain non-limiting implementations of position transducers for galvanometer-driven scanners are described in U.S. Patent No. 6,218,803, which is hereby incorporated by reference in its entirety for all purposes. The signal from transducer 515 is provided in the illustrated implementation to user computer 100B so that clock pulses may be provided for digital sampling of emission signal 492 when arm 500 is in certain positions along its scanning arc.

Arm 500 is shown in alternative positions 500' and 500" as it moves back and forth in scanning arcs about axis 510. Excitation beams 435 pass through objective lens 445 on the end of arm 500 and excite fluorophore labels on targets hybridized to certain of probes 370 in arrays 132 disposed on slide 333, as described above. The arcuate path of excitation beams 435 is schematically shown for illustrative purposes as path 550. Emission beams 452 pass up through objective lens 445 as noted above. Slide 333 of this example is disposed on translation stage 542 that is moved in what is referred to herein as the "y" direction 544 so that arcuate path 550 repeatedly crosses the plane of arrays 132.

Figure 5B is a top planar view of arm 500 with objective lens 445 scanning arrays 132 as translation stage 542 is moved under path 550. As shown in Figure 5B, arcuate path 550 of this example is such that arm 500 has a radial displacement of θ in each direction from an axis parallel to direction 544. What is referred to herein as the "x" direction, perpendicular to y-direction 544, is shown in Figure 5B as direction 543. Further details of confocal, galvanometer-driven, arcuate, laser scanning instruments

suitable for detecting fluorescent emissions are provided in PCT Application PCT/US99/06097 (published as WO99/47964) and in U.S. Patents Nos. 6,185,030 and 6,201,639, all of which have been incorporated by reference above. It will be understood that although a galvanometer-driven, arcuate, scanner is described in this illustrative implementation, many other designs are possible, such as the voice-coil-driven scanner described in U.S. Patent Application, Serial No. 09/383,986, hereby incorporated herein by reference in its entirety for all purposes.

Figure 6A is a simplified graphical representation of illustrative probe 370A as it is scanned by scanner 160A. It is assumed for illustrative purposes that probe 370A has hybridized with a fluorescently labeled target. Although Figure 6A shows probe 370A in idealized form, i.e. a perfect circle, it will be understood that many shapes, including irregular shapes, are possible.

In the manner described above, objective lens 445 scans over probe 370A (and other probes of arrays 132) in bi-directional arcs. An illustrative scan 620 is shown in Figure 6A, which is not necessarily drawn to scale; e.g., the ratio of the radius of the arc of scan 620 to the radius of probe 370A is illustrative only. As also noted, probe 370A moves under objective lens 445 carried by translation stage 542 in y-direction 544. In particular, in the illustrated implementation, arm 500 scans in an arc in one direction, shown as left-to-right scan 620 in Figure 6A. Translation stage 542 is then moved incrementally by a stepping motor (not shown) in y-direction 544 and arm 500 then scans back in the opposite direction, shown as right-to-left arcuate scan 622.

Translation stage 542 is again moved in direction 544, and so on in scan-step-scan-step sequences. The distance between scans 620 and 622 thus corresponds to the distance that translation stage 542 is moved in each increment, although it will be understood that the distance shown in Figure 6A is not necessarily to scale and is illustrative only. It will be understood that any other combination of scanning and stepping is possible in alternative implementations, and that scanning and moving of translation stage 542 may occur at the same or at overlapping times in some implementations. Translation stage 542 need not be stepped in some implementations, but may, for example, be moved continuously.

Figure 6B is a plot having a pixel clock axis 630 showing when clock pulses 632 occur. Clock pulses 632 may be generated by a pixel clock of scanner 160A (e.g., complex programmable logic device 830, described below) or, alternatively, they may be generated by software executing in computer 100B (e.g., executable 790, described below). Axis 630 in the illustrated implementation is a spatial axis; that is, each of clock pulses 632 occurs in reference to the radial location of arm 500 during each scan, as described in greater detail below. Thus, with reference to the position of translation stage 542 indicated by scan 620, a clock pulse 632A occurs prior to arm 500 passing over probe 370A from the left as shown in Figures 6A and 6B. (For sake of clarity of illustration only, vertical dotted lines are provided between Figures 6A and 6B, and between Figures 6B and 6C, to illustrate the alignment of these figures.) As another example, clock pulse 632C occurs with respect to scan 620 when arm 500 has just passed over portions of probe 370A indicated by pixel areas 610A and 610B. These areas are referred to as pixel areas because a digital value is assigned to each such area in the illustrated implementation based on the strength of a processed emission signal associated with that area. In accordance with known techniques, clock pulses 632 enable the digital sampling of the processed emission signal.

As noted, clock pulses 632 are spatially rather than temporally determined in the illustrated implementation. Moreover, in some aspects of the illustrated implementation, galvanometer 516 is driven by a control signal provided by user computer 100B such that the velocity of arm 500 in x-direction 444 is constant in time during those times when arm 500 is over probe 370A (and, typically, over other of probes 370 of arrays 132 as they are scanned). That is, dx/dt is a constant (and thus the angular velocity varies) over the probe-scanning portions of each arc and, in particular, it is a constant during the times when clock pulses are generated to enable digital sampling. As is evident, dx/dt must be reduced to zero between each successive scan, but this deceleration and reversal of direction takes place after arm 500 has passed over probe 370A (or, more generally, array 132A or 132B). The design and implementation of a galvanometer control signal to provide constant dx/dt are readily accomplished by those of ordinary skill in the relevant art.

Thus, the approximate sampling rate may readily be calculated based on the desired scanning speed (dx/dt) and desired pixel resolution. To provide an illustrative example, a spot deposited by an Affymetrix® 417™ or 427™ Arrayer typically has a diameter of approximately 150 to 200 microns. Spotted arrays made using these
5 instruments typically may be deposited over a surface having a width of about 22 millimeters on a microscope slide that is 25 millimeters wide. In order to achieve pixel resolution of about 10 microns, a sampling rate of about 160 kHz is sufficient for scanning speeds typical for scanners used with respect to these probe arrays, such as the Affymetrix® 428™ scanner. Other sampling rates, readily determined by those of
10 ordinary skill, may be used in other applications in which, for example, different scanning speeds are used and/or different pixel resolutions are desired. The desired pixel resolution typically is a function of the size of the probe features, the possibility of variation in detected fluorescence within a probe feature, and other factors.

Figure 6C shows digital values representative of emission signal 492 as sampled
15 at (and/or collected for an adjoining period before) points on scans 620 and 622 represented by constant radial position lines 625A-K (collectively referred to as radial position lines 625). The voltages sampled during scan 620 are shown as dots, while the voltages sampled during scan 622 are shown as x's. The determination of when to initiate pixel clock signals may be made using position transducer 515, as described in
20 greater detail in U.S. Provisional Patent Application Serial No. 60/286,578, incorporated by reference above. Thus, for example, voltage 650C of Figure 6C is representative of emission signal 492 based on sampling enabled by a pixel clock pulse at point 632C on axis 630 that is triggered when arm 500 is at radial position 625C during scan 620. After translation stage 542 has been incremented, voltage 652C is
25 sampled during scan 622 at the same radial position, shown as radial position 625C".

User Computer 100B

As shown in Figure 1 and noted above, scanner 160B operates in the illustrated implementation under computer control, e.g., under the control of user computer 100B, as shown in greater detail in Figure 7. Although computer 100B is shown in Figures 1
30 and 7 for clarity as being directly coupled to scanner 160A, it may alternatively be

coupled to scanner 160A over a local-area, wide-area, or other network, including an intranet and/or the Internet. Computer 100B may be a personal computer, a workstation, a server, or any other type of computing platform now available or that may be developed in the future. Typically, computer 100B includes known components
5 such as processor (e.g., CPU) 705, operating system 710, system memory 720, memory storage devices 725, GUI controller 715, and input-output controllers 730, all of which typically communicate in accordance with known techniques such as via system bus 704. It will be understood by those skilled in the relevant art that there are many possible configurations of the components of computer 100B and that some components
10 that may typically be included in computer 100B are not shown, such as cache memory, a data backup unit, and many other devices.

Input-output controllers 730 could include any of a variety of known devices for accepting and processing information from a user, whether a human or a machine, whether local or remote. Such devices include, for example, modem cards, network
15 interface cards, sound cards, or other types of controllers for any of a variety of known input devices. Output controllers of input-output controllers 730 could include controllers for any of a variety of known display devices for presenting information to a user, whether a human or a machine, whether local or remote. If one of these display devices provides visual information, this information typically may be logically and/or
20 physically organized as an array of picture elements, sometimes referred to as pixels. Graphical user interface (GUI) controller 715 may comprise any of a variety of known or future software programs for providing graphical input and output interfaces between computer 100B and a user 701 (e.g., an experimenter wishing to use scanner 160A to acquire and analyze information from spotted arrays), and for processing inputs from
25 user 701 (hereafter sometimes referred to as user inputs or user selections). To avoid confusion, references hereafter to a "GUI" generally are directed to one or more graphical user interfaces displayed on a display device of devices 780 to user 701, such as GUI 782A of Figures 8 and 9, described below. To be distinguished are references to a "GUI controller," such as GUI controller 715, that operates to display the GUI's to
30 user 701 and to process input information provided by user 701 through the GUI's. As

is well known in the relevant art, a user may provide input information using a GUI by selecting, pointing, typing, speaking, and/or otherwise operating, or providing information into, one or more input devices of devices 780 in a known manner.

Computer 100B may optionally include process controller 740 that may, for example, be any of a variety of PC-based digital signal processing (DSP) controller boards, such as the M44 DSP Board made by Innovative Integration of Simi Valley, California. More generally, controller 740 may be implemented in software, hardware or firmware, or any combination thereof.

Scanner Control and Analysis Application 790

Scanner control application 790 of the illustrated implementation is a software application that controls functions of scanner 160A. In addition, when executed in coordination with processor 705, operating system 710, GUI controller 715, and/or process controller 740, application 790 performs user interface functions, data and image processing operations, and data transfer and storage operations related to data provided by or to scanner 160A and/or user 701, as described in greater detail below. Affymetrix® Jaguar™ software, available from Affymetrix, Inc., is a commercial product that, in some implementations, includes various aspects of application 790.

More particularly as shown in Figure 8A, scanner control application 790' in the illustrated implementation includes a GUI manager 810A, which enables user 701 to specify a file (or other data structure in other implementations) including location data corresponding to probe-feature locations on a substrate to be scanned. Also included in application 790' is data retriever 820A, which, based on the selection made by user 701, accesses the location data and provides this data to another element of application 790', scan area controller 840. Scan area controller 840 controls scanner 160A so that its scanning area includes a scanning area within which the probe-feature locations specified by the location data are located. These operations are now further described and their relations to method steps of the illustrative flow chart of Figure 11A are parenthetically indicated.

In connection with Figures 2 and 3A, it was noted above that user 201 may specify probe feature locations in a variety of ways (see corresponding illustrative

method step 1110A in Figure 11A). These selections, as also noted, may be stored in computer 100A as an array content file (or other data structure) such as illustrative file 292 (see step 1120A). GUI manager 810A, in cooperation with GUI controller 715 noted above, receives user selections of file identifiers in an illustrative implementation

5 from user 701 through GUI 782A as shown in Figure 9A (see step 1130A). GUI 782A includes a file tree window 910 in which user 701 may select from a list of "csv" files that, in this example, are array content files (such as file 292) identified by a ".csv" file extension. In particular, it is illustratively assumed that user 701 selects array content file 920 from expandable-collapsible csv node 915A (Figure 9A). Alternatively, user

10 701 may make this selection in accordance with any of a variety of other conventional techniques, such as selecting an item from a pull down list using graphical elements 930A and 932A. Referring to Figure 8A, GUI manager 810A, in accordance with conventional techniques, thus provides to data retriever 820A user 701's specification of location data 812 for use in scanning a substrate specified, for example, in one or more

15 of graphical elements 940A-F (Figure 9A).

Employing any of a variety of conventional techniques for retrieving data over a network or otherwise, data retriever 820 retrieves array content data 292' and, in this implementation, stores it in array data file 792 in system memory 720 of computer 100B, as shown in Figure 7. In particular, data retriever 820 may extract probe location

20 data from array data 792, as illustrated by location data 822 of Figure 8A (see step 1140). Data retriever 820 in this example provides this data to scan area controller 840 and, in some implementations, to GUI manager 810A. Using this data, GUI manager 810A may advantageously display to user 701 the probe location information obtained by data retriever 820. For example, GUI 782B of Figure 9B includes scan area display

25 window 1009 and scan area data window 1020. Included in window 1019 are x and y coordinate information as extracted from array data 792 showing, for example, user-selected reference x and y coordinates 1022 and 1024. Illustratively assuming that user 701 had selected a spacing between probe locations, as discussed above, then the these coordinates 1022 and 1024 establish probe locations for probes in the array or arrays

30 identified by graphical element 940A of GUI 782A and corresponding graphical

element 1040 of GUI 782B. In the example illustrated in Figure 9B, user 701 may change the scan area by changing coordinates 1022 and/or 1024, perhaps based on viewing a representation of the scan area 1012 as displayed in window 1009. User 701 may also change the scan area by changing the values for scan area width 1026 and/or scan area height 1028 in window 1019, and/or by dragging buttons provided on the representation of scan area 1012, all in accordance with conventional techniques.

User 701 may initiate a scan that includes scan area 1012 in accordance with any of a variety of conventional techniques, such as by selecting start scan button 1049 (see decision element 1150A and step 1160A in Figure 11A). Upon receiving this command, scan area controller 840 (Figure 8A) initiates scanning by scanner 160A, typically through output devices of input/output devices 780 (Figures 8A and 8B).

In some implementations, controller 840 may cause repeated scans to be made on each of two or more different substrates using probe location data extracted from one or more user-selected array content files. For example, user 701 may specify two or more array content files 292, as by selecting multiple files from node 915. Controller 840 then may initiate batch scans, in serial or parallel, using one or more scanners 160, of multiple slides or other substrates using the location data contained in the user-selected array content files.

As will be evident to those skilled in the relevant art, application 790 may be loaded into system memory 720 and/or memory storage device 725 through an input device of devices 780. Alternatively, application 790 may be implemented as executable instructions stored in firmware, or a combination of firmware and software. Executable code corresponding to application 790 is referred to as scanner control and analysis application executable 790' and is shown for convenience with respect to the illustrated implementation as stored in system memory 720. However, instructions and data including executable instructions of executable 790', and data used or generated by it, may be located in or shifted among other memory devices, local or remote, as convenient for data storage, data retrieval, and/or execution. The instructions of executable 790', also called computer control logic, when executed by processor 705, enable computer 100B to perform functions of the illustrated systems. Accordingly,

executable 790' may be referred to as a controller of computer 100B. More specifically, in some implementations, the present invention includes a computer program product comprising a computer usable medium having control logic (computer software program, including program code) stored therein. In various embodiments, software products may be implemented using any of a variety of programming languages, such as Visual C++ or Visual Basic from Microsoft Corporation, Java™ from Sun Microsystems, Inc., and/or other high or lower level programming languages. The control logic, when executed by processor 705, causes processor 705 to perform some of the functions of the invention, as described herein. In other embodiments, some functions of the present invention may be implemented primarily in hardware using, for example, a hardware state machine. Implementation of the hardware state machine so as to perform the functions described herein will be apparent to those skilled in the relevant arts.

Gain Adjustment Components 890

Figure 8 is a simplified functional block diagram of one example of a configuration of gain adjustment components of illustrative scanner system 150A. For convenience of illustration, these components are described with reference to user computer 100B of Figures 1 and 7 and scanner 160B of Figures 1, 4, 5A, and 5B, although it will be understood that many alternative computer and/or scanner implementations are possible. For sake of clarity, Figure 8 omits some aspects of computer 100B and scanner 160B as described above (e.g., communications among components of computer 100B via system bus 704), the functions of which are implicit in Figure 8 and will be evident to those of ordinary skill in the relevant art.

A reason for providing gain adjustment is that, under certain conditions, the dynamic range of scanner 160B may be exceeded. For example, the dynamic range of scanner 160B may be exceeded due to excitation source 420A or 420B having been set at too high a gain, a higher-than-anticipated responsiveness of labels to excitation beams 435, a high gain setting of emission detector 415, a high gain setting of circuitry that amplifies emission signal 492 (e.g., variable gain amplifier 815, described below), or for other reasons. When the dynamic range is exceeded, some image pixels displayed to

represent emission signal intensities may appear to be equally bright even though they represent emissions of varying intensities. This effect, whatever its cause, may interfere with the implementation of conventional techniques that, for example, search for the boundaries between bright and dim elements in an alignment pattern. The unintended result may be that an alignment grid is inaccurately positioned over an image because
5 the grid was inaccurately aligned with an alignment pattern defined by boundaries between bright and dim pixels. See, e.g., U.S. Patent Application, Serial No. 09/681,819, hereby incorporated herein in its entirety for all purposes. Another unintended result may be that data regarding emission signal values is lost due to signal
10 saturation.

One example of a saturation effect is illustrated by Figures 6C and 6D. In Figure 6C, analog voltage values of emission signal 492 (or amplified and/or filtered versions of that signal, as described below) are sampled by process controller 740 according to pixel clock pulses 632. The sampled analog voltages are shown on axis
15 640 of Figure 6C, some of which (such as voltages 650I and 650H) are above a saturation value 660. Saturation value 660 typically is imposed because of limitations in digital conversion such as represented by digital conversion range 662. For example, it may be determined, based on desired resolution, anticipated dynamic range, and digital processing constraints, that analog voltages within range 662 will be converted to
20 digital values between 0 and $2^{16}-1$, i.e., between 0 and 65,535. Analog voltages above value 660 would thus typically be represented by digital values 690H and 690I at the maximum digital conversion value represented by maximum digital voltage line 672. Specifically, in this example, the digital value both of values 690H and 690I is 65,535, even though corresponding analog voltages 650I and 650H have different values. It is
25 also possible that hardware limitations, such as the range of power supplies in amplifier 815, described below, impose an analog saturation voltage such that voltages 650I and 650H would have a same value even though they represented emissions of different intensities. Similarly, emission detector 415 may saturate so that values of emission signal 492 are constant above a saturation value.

The gain adjustment components of scanner 160A, as shown in the illustrated implementation of Figure 8, include emission detector 415, filters 810 and 820, variable gain amplifier 815, and CPLD 830. Emission detector 415 may be any of a variety of conventional devices including, for example, a photomultiplier tube (PMT), such as
5 included in the HC120 Series PhotoSensor Modules available from Hamamatsu Corporation USA of Bridgewater, New Jersey. VGA 815 is a type of what more generally is referred to as a variable gain element. VGA 815 may be any of a variety of conventional amplification devices such as the model AD606 amplifier available from Analog Devices of Norwood, Massachusetts. CPLD 830 may be any conventional
10 CPLD (or similar device such as a Field Programmable Gate Array), such as are available from Altera Corporation of San Jose, California, or other suppliers.

Filter 810 may be any filter designed to eliminate high frequency spikes that may be present in signal 492 and thus provide protection to VGA 815. As described in U.S. Provisional Patent Application Serial No. 60/286,578 incorporated above, it
15 generally is desirable for bi-directional scanning, such as in the illustrated implementation of Figures 4, 5A, 5B, and 6A, that the rise and fall response characteristics of emission signal filters be symmetrical. Thus, linear-phase filters, such as high-order Bessel filters, may advantageously be employed. In particular, filter 810 may be the first stage of a Bessel filter. Filter 820 may advantageously comprise
20 additional Bessel filter stages having the desired response characteristics while providing low-pass filtering of noise in emission signal 492. As described in application 60/286,578, noise may be present due to the use of relatively inexpensive lasers such that noise in excitation beams 435 causes corresponding noise in emission beams 452.

25 CPLD 830 provides pixel clock pulses 632 to controller 740 so that, in accordance with known analog-to-digital techniques, it may sample analog emission signal 822. CPLD 830 determines clock pulses 632 in the illustrated implementation by comparing radial position information from galvo position transducer 515 with radial position data stored in system memory 220, as described in application 60/286,578.

User-Selected Gain Adjustment: The illustrative configuration of components of scanner system 150A shown in Figure 8, and GUI 782A shown in Figure 9, address the problem of emission signal saturation based either on user-selected gain adjustment or automatic gain adjustment. Illustrative implementations are now described with
5 respect to Figures 10, 11, 12A, and 12B that are directed to the option of user-selected gain adjustment.

In this illustrative implementation, GUI 782A is employed to enable user 701 to vary emission detector control signal 784 over a first range of values and/or to vary variable gain element (VGA) control signal 783 over a second range of values, thereby
10 controlling the gains of emission detector 415 and variable gain amplifier 815, respectively, during the scanning process (also referred to herein as a "scanning operation"). User 701 may determine that a gain adjustment is desirable by inspecting an image comprising scanned pixels, generated as described above with respect to Figures 6A-6D, for a previously conducted experiment similar to a new experiment, or a
15 prior attempt at conducting the first experiment. User 701 may note that a significant portion of the previously scanned pixels in the prior experiment or prior attempt were uniformly and maximally bright (perhaps indicating saturation due to excessive scanner gain), that there are no maximally bright pixels (perhaps indicating that a low gain setting has resulted in a less-than-attainable dynamic range), or that there are a
20 significant number of dark pixels (again perhaps indicating less-than-attainable dynamic range). Alternatively, during the previously conducted scan, executable 790' may have counted the number of pixels having digital voltage values represented by maximum digital voltage line 672. If this number exceeded either a predetermined or user-selected threshold, executable 790' could have provided an appropriate message to user 701
25 through a graphical user interface or another conventional technique. Similarly, executable 790' may have counted the number of dark pixels to determine, for example, if the proportion of dark pixels exceeds an anticipated threshold. In any of these cases, user 701 may decrease the gain to avoid saturation or increase the gain to improve resolution of small signals for future scanning operations. These, and other, optional

operations by executable 790' are described below in relation to implementations including automatic gain adjustment.

More generally, user 701 may determine the desired gain based on a variety of additional factors, such as experience with scanner 160A, experience with the
5 fluorescent labels in particular dyes to be used, and so on. By rescanning multiple times at a series of gain settings, user 701 may obtain measures of pixel intensities across a range that exceeds the dynamic range of the scanner. For one example of how extended dynamic range may be determined, see U.S. Patent No. 6,171,793, hereby incorporated by reference herein for all purposes.

10 Figure 9 is a graphical representation of one of many possible implementations of GUI 782A. GUI 782A includes up-arrow and down-arrow graphical elements 912 and 914 that, in accordance with known techniques, enable user 701 to respectively increase or decrease a value displayed in graphical element 910. For example, user 701 may illustratively be assumed to be enabled to vary the value displayed in element 916
15 between "0" and "70," wherein the selected value represents a decibel (dB) value within this range. In this manner, user 701 may set a gain in relation to a reference gain at which scanner 160A nominally operates, i.e., operates when the user-selected gain value is zero.

The reference gain in this example is illustratively assumed to be set by the
20 maker of scanner 160A in accordance with various objectives. One objective may be to ensure that the reference gain is sufficiently low that saturation will not occur at that level. Thus, user 701 may be presented simply with the option of increasing gain in order to more accurately identify low-intensity emissions and need not be concerned with saturation if the user-selected gain value remains at zero. In alternative
25 implementations, the reference gain may be set higher and the user provided with options for decreasing, as well as increasing, the gain of scanner 160A in relation to that reference.

Another objective that may be relevant to establishing the reference gain is to calibrate scanner 160A with other scanners. For example, a technician may adjust the
30 reference gain based on scanning a benchmark fluorescent feature on a calibration slide.

The technician measures the value of emission signal 492 when the benchmark is excited and adjusts the gain of emission detector 415 so that signal 492 is a standard value. As noted, this standard value is low enough to ensure that saturation will not occur if the user-selected gain value remains at a default value of zero. This procedure
5 typically is repeated for each of excitation sources 420 because the response of emission detector 415 may vary depending on the wavelength of filtered emission beam 454.

In the illustrated implementation, it is illustratively assumed that the gain of emission detector 415 may be varied over a range of 60 decibels by varying a control voltage (shown in Figure 8 as emission detector control signal 784). It is further
10 illustratively assumed that up to 30 decibels is reserved for making the calibration. That is, even if the calibration requires an increase of 30 decibels in emission signal 492, a range of an additional 30 decibels will be available for user-selected adjustment of signal 492. Figure 10 is a graphical representation of an illustrative distribution of both calibration and user-selected gain settings as applied to emission detector 415 and
15 variable gain amplifier 815. As shown in Figure 10, executable 790' stores the calibrated gain settings for each of excitation sources 420 in a memory unit of computer 100B, as illustratively represented by calibration data 798 in system memory 720 of the present example. For instance, data 798 may include records specifying that the calibration setting for detector 415 when source 420A (e.g., diode laser) is operational is
20 15 decibels, and the calibration setting for detector 415 when source 420B (e.g., doubled YAG laser) is operational is 5 decibels. These functions are indicated in Figure 10 by the dotted line showing the correspondence between calibration range 1040 (30 dB in this example) and executable 790', and the transfer of the calibration control value from data 798 via executable 790' and emission detector control signal 784 to emission
25 detector 415.

In a specific illustrative implementation, a gain value, as selected by user 701 using graphical elements 912 or 914 and displayed in element 910, is provided to executable 790' in accordance with known GUI techniques. User 701 typically may wish to select a gain value that is specific to the particular one of excitation sources 420
30 used to generate emission signal 492. This option is desirable because, as noted, the

response of emission detector 415 may vary depending on the wavelength of emission signal 492 that, in turn, generally depends on the wavelength of the excitation signal generated by the excitation source. Other experimental parameters, such as the type of label (e.g., fluorophore dye), may similarly influence user 701's selection of gain. In the example shown in Figure 9, user 701 has determined that for a scanning operation related to a particular experiment identified in graphical element 910, in which the dye "CY5" (see graphical element 927) may have been associated with hybridized probe-target pairs of one of arrays 132, and in which the array is to be excited by red diode laser 420A (see graphical element 925), the user-selected gain should be 43 decibels (see graphical element 916). User 701 could similarly specify that, in the same scanning operation, another dye is also potentially present and that another one of sources 420 is to be used (in the same or sequential scan, depending on the design of scanner 160A) to excite the fluorophores of this dye, if present.

It is now illustratively assumed that user 701 instructs executable 790' to cause scanner 160A to scan an array in a scanning operation undertaken in accordance with the experiment represented in Figure 9. Executable 790' causes digital signals to be generated that represents the user-selected gain values for the specified excitation sources, and these signals are provided to a digital-to-analog converter (not shown) that provides analog control signals representative of the user-selected gain values, all in accordance with any of a variety of known techniques. For a gain value between zero and 40 decibels in the illustrated implementation, executable 790' causes switching to be enabled such that the representative analog value (e.g., VGA control signal 783) is provided to a control input of variable gain element (VGA) 815. Thus, for instance, user 701 may select a gain of 5 decibels by manipulating elements 912 or 914 as described above or, in an alternative implementation of aspects of GUI 782A shown in Figure 10, placing user-selectable slide element 1005 to a first position A as represented by element 1005A. The result in either case is that a control voltage is applied to VGA 815 such that, in accordance with known techniques, amplified analog emission signal 817 is increased by 5 decibels over a nominal operating gain (e.g., unity) for VGA 815. In this illustrative range of zero to 40 decibels, no portion of the user-selected gain is

allocated to emission detector 415; i.e., all of the user-selected gain is allocated to VGA 815. Thus, the portion of user-selected gain allocated to emission detector 415 may hereafter be referred to as a "no-change value" to indicate that, although the gain of emission detector 415 may have been adjusted for purposes of calibration or for other reasons, it is not adjusted based on the user-selected gain in this example.

For user-selected gain values of 40 decibels and above in the illustrated implementation, executable 790' maintains emission detector control signal 784 such that the output of VGA 815, i.e., emission signal 817, is increased by 40 decibels above its nominal 0 dB level. Executable 790' also causes emission detector control signal 784 to assume a value representative of the amount that the user-selected value exceeds 40 decibels. For instance, if user 701 selects 45 dB, as represented by user-selectable slide element 1005B, VGA control signal 783 is set at a value such that VGA 815 provides 40 decibels of gain, and emission detector control signal 784 assumes a value such that emission detector 415 provides an additional 5 decibels of gain.

It will be understood that many other techniques are available by which user 701 may select a desired gain and by which a portion of this gain may be implemented by emission detector 415 and a portion by variable gain amplifier 815. For example, the initial range of gain could be implemented by emission detector 415 rather than by VGA 815 as in the illustrated example. Also, any user-selected gain could be implemented in a same range in any proportion between emission detector 415 and VGA 815. For example, any gain selected by user 701 could be implemented 50% by emission detector 415 and 50% by VGA 815. Further, in some implementations, any available capacity in calibration range 1040 (e.g., if scanner 160A were calibrated at 20 decibels so that 10 decibels of the 30 decibels in range 1040 were available) could be provided for user-selected gain so that, in the illustrated example, user-selectable range of gain values 1020 could be increased from 30 decibels to 40 decibels. Also, many alternative user interfaces may be used. For example, GUI gain adjustment element 1000 was described above as having a single user selectable slide element 1005 that could be moved by user 701 between various positions such as positions A and B of the illustrated example. In one of many alternative implementations, two slide elements

could be provided so that user 701 could separately select a gain attributed specifically to emission detector 784 (e.g., a separate slide element 1005B operating over a range of gain values 1020) and a gain attributed specifically to VGA 815 (e.g., a separate slide element 1005A operating over a separate range of gain values 1030). In this alternative
5 implementation, gain ranges 1020 and 1030 could, of course, be separated from each other rather than stacked.

Figure 11 is a functional block diagram including elements of application executable 790' that implement some of the operations described above with respect to the illustrative example. Figures 12A-C are flow charts showing method steps
10 corresponding to some of these operations. As shown in Figure 11, application executable 790' includes calibration-gain data manager 1110 that receives calibration-gain data (i.e., values of calibrated gains for each of excitation sources 420) input by technician 1101 through an appropriate user interface (not shown). (See corresponding method step 1205.) Calibration-gain data manager 1110 stores this data in appropriate
15 records or other data-storage formats of calibration data 798 so that a calibration gain is associated with each of excitation sources 420 (see step 1210).

Application executable 790' also includes user-selected gain data manager 1120 that receives the user-selected gain to be applied to emission detector 415 and VGA 815. This gain may input via GUI 782A of Figure 8, or alternative interfaces such as
20 that employing graphical elements 912 and 914 or user-selectable slide element 1005. The user-selected gain typically is associated by user 701 with particular ones of excitation sources 420 and/or particular experiments in which, for example, certain dyes with fluorescent labels are to be used. (See corresponding method step 1225.) Thus, user 701 may repeatedly use GUI 782A, or another interface, to select a gain to be used
25 for particular excitation sources and/or experiments. User-selected gain data manager 1120 stores this data in appropriate records or other data-storage formats of scanner gain data 799 so that a user-selected gain is associated with each of excitation sources 420, typically for each of one or more specified experiments (see step 1230).

For example, an illustrative record 799A is shown that stores the information
30 that, when a particular scan of a microarray experiment, identified as "Scan ID = 0001,"

is performed, emission signal 492 from red diode laser source 420A is to be amplified by 45 decibels by providing a gain of 5 decibels from emission detector 415 and 40 decibels from VGA 815. It is illustratively assumed that user 701 directs scanner 160A to perform scan 0001 by using an interface such as illustrative GUI 782A that is graphically represented in Figure 9 (see step 1260 and graphical elements 940 or 950, described below).

Application executable 790' includes scan gain controller 1130 that, in accordance with any of a variety of known data search and retrieval techniques, retrieves record 799A. Alternatively, rather than storing scanner gain data 799 and later initiating a scan, user 701 may specify scanner gain data 799 and provide scan initiation data 1106 using a common user interface and/or in a common operation in accordance with other known techniques. (See step 1270.) Scan initiation data 1106 typically includes an indicator that user 701 has initiated a scan or a preview scan, such as may be done, for example, by selecting graphical elements 950 or 940, respectively. Also, initiation data 1106 may include other information such as a selected preview resolution, described below.

Based on scanner gain data 799, scan gain manager 1130 allocates the user-selected gain value between emission detector 415 and VGA 815 (see step 1275). Scan gain manager 1130 then applies these gains by, for example, causing emission detector control signal 784 to be sent to emission detector 415 to set its gain at 5 decibels and causing VGA control signal 783 to be sent to VGA 815 to set its gain at 40 decibels (see step 1280). Typically, these control signals are provided via a conventional output device of input/output devices 780 (see step 1280).

Automatic Gain Adjustment: User 701 also may choose to employ automatic gain adjustment rather than user-selected gain adjustment as just described. This choice may be implemented in accordance with a variety of known techniques, such as by user 701 selecting graphical element 920. Typically, this selection deactivates graphical elements for the implementation of user-selected gain (e.g., by graying out element 916 and deactivating elements 912 and 914). However, in some implementations, both options may be provided so that, for example, a user-selected gain value is used if the

automatic gain adjustment technique is not able to function due to a lack of data or other reason. Also, automatic gain adjustment may be a default option, or it may be provided without providing the option of user-selected gain adjustment.

Figure 13 is a flow chart showing steps by which, in one illustrative embodiment, scan
5 gain controller 1130 automatically determines a gain, allocates it between emission detector 415 and VGA 815, and applies it to those elements.

As indicated by method step 1305, controller 1130 in this example determines whether user 701 has enabled the automatic gain feature. If user 701 has not enabled the automatic gain feature, or it is de-selected by default or otherwise not enabled, a
10 user-selected gain may be determined and allocated as described above (see step 1307, invoking step 1250).

If user 701 has enabled the automatic gain feature, user 701 in this example may also optionally provide parameters according to which a preview scan will be initiated by controller 1130 (see step 1315). Controller 1130 causes a preview scan to be made
15 in order to obtain pixel intensity samples indicative of the range of pixel intensities in the scanned image (see step 1320).

To provide one of many possible examples of the implementation of steps 1315 and 1320, it is illustratively assumed that user 701 selects graphical element 942 (labeled "Preview Resolution") to be 20 microns, as shown in GUI 782A of Figure 9.
20 Assuming, as above, a nominal pixel resolution of 10 microns, then this user selection is illustratively assumed to indicate that each group of two pixel values is averaged to provide a single sample pixel value. Thus, this user selection specifies a resolution parameter such that the resolution is 20 microns, or half the nominal resolution value. In alternative implementations, this user selection could indicate that only every other
25 pixel is obtained or recorded, thus providing another sample measure for the same resolution.

It further is illustratively assumed in accordance with previous examples that translation stage 542 moves 10 microns in the "y" direction between each line scan. The user selection in this example of 20 micron pixel resolution may further be
30 implemented by scanning every other line rather than every line, thus reducing the pixel

resolution in the y direction also by half. Thus, for instance, in a regular scan mode, sample pixels are obtained both for scans 620 and successive scan 622 of the example of Figure 6A. When user 701 selects 20 microns for the value of graphical element 942 indicating one half the nominal resolution, then, in this specific implementation, pixels
5 from every other scan line, rather than every scan line, are included in the samples. Similarly, user 701 may select 50 micron resolution, resulting in this illustrative implementation in the averaging of every five 10-micron pixels in each scan line, and scanning only one-fifth as many lines in the y direction as would nominally be the case. That is, translation stage 542 is stepped five increments between scans, rather than the
10 nominal one increment. As can be seen from Figure 6A, at least two scan lines of sample pixels would be obtained from scanning probe 370A even if user 701 had elected to obtain sample pixels only from every fifth scan line, assuming that probe 370A is a spot of about 150 to 200 microns diameter, as is typical in some applications.

It will be understood that scanner 160A typically scans across many probes in
15 each scan line. The scan line may extend from one edge of the substrate (e.g., microscope slide) to the other, or at least across the width of a portion of the substrate often referred to as a "scanning area" because within it are contained the "features" (i.e., in the present example, probes or probe-target pairs, sometimes therefore referred to as "probe features") to be scanned. The locations on the substrate where probe features are
20 located may therefore be referred to herein as "probe-feature locations." Similarly, translation stage 542 typically is moved a sufficient distance in the y direction so that the full height of the scanning area is scanned. In the illustrated example of GUI 782A of Figure 9, user 701 may define the scanning area by selecting values in a graphical portion 960 (labeled "Scan Area"). For example, a value for "X" in portion 960
25 indicates a distance in the x direction from the left edge of the slide to the left edge of the scanning area, a value for "Y" in portion 960 indicates a distance in the y direction down from the top edge of the slide to the top edge of the illustrative rectangular scanning area, and the "Width" and "Height" values in portion 960 specify the width and height of the illustratively rectangular scanning area. Alternatively, user 701 may
30 employ conventional drag or other techniques to change the dimensions of the scanning

area as represented by the rectangular graphical element 970 of this example. It will be understood that the scanning area need not be a rectangle in other implementations, but may be any shape.

Controller 1130 may store the sample pixel intensity values collected during the
5 preview scan over the scanning area in an appropriate data structure, such as represented by sample intensity data 797 stored in system memory 720 as shown in Figure 7. Based on these sample values, controller 1130 determines a value for the automatic gain adjustment (see step 1330). This determination may be made in a variety of ways. One illustrative technique is represented by the flow chart of Figure 14 and the functional
10 block diagram of Figure 15. As shown in step 1410, controller 1130 determines an initial auto-gain value for a first iteration of the preview scan (see auto-gain value selector 1505). For instance, using the present example of a 70 decibel range of gain achieved by a combination of gain from emission detector 815 and gain from VGA 415, controller 1130 may select an initial gain at the mid-point of this range, i.e., 35 decibels,
15 although any other initial value may be selected in other implementations. Controller 1130 may, but need not, allocate this 35 decibels of gain between emission detector 815 and VGA 415 in the same manner as described above with respect to the allocation of user-selected gain. Thus, in the illustrated example in which the first 40 decibels is allocated to VGA 415 (above the calibration gain allocated to emission detector 815),
20 the 35 decibels would all be allocated to VGA 415. As indicated by step 1420 and described above, sample pixels are then collected for the scanning area at the user-selected resolution and with the initial value of auto gain selected by controller 1130 (see intensity manager 1540).

Controller 1130 then compares the distribution of sample pixel intensities to a
25 desired distribution (see comparison manager 1550). This comparison may be accomplished in accordance with any of a wide variety of statistical and other techniques. In some applications, a statistical measure, such as a mean or average, may be calculated and compared with a desired mean or average intensity. Generally, however, such an approach would not necessarily take into account the characteristics of
30 a typical scan in which, for example, the number of "background pixels," i.e., pixels

associated with a dark background (i.e., no fluorescent probe-target features possible since probes were not deposited) are relatively large and relatively predictable. Thus, it typically is advantageous to devise a comparison technique that takes into account expected relationships of low intensity (hereafter sometimes referred to for convenience
5 as "dark") pixels to high intensity ("light") pixels, including the expected relationship of background pixels to "probe pixels," i.e. pixels associated with probes that may be associated with fluorescent labels or other emission labels.

As but one non-limiting example of a technique that accounts for anticipated scan characteristics, controller 1130 may assign each pixel intensity value to a bin of a
10 histogram. As in the example of digital conversion range 662 of Figure 6C, the possible digital range of these pixel intensity values in this illustration is between 0 and 65,535. Thus, for instance, 15 bins may be used wherein bins 1 through 5 contain the lower intensity values (where pixels of intensity value 0 are assigned to bin 1), bins 6 through 10 contain mid-range intensity values, and bins 11 through 15 contain high-range
15 intensity values (where pixels of intensity value 65,535 are assigned to bin 15).

Controller 1130 calculates in this specific illustrative example a ratio determined by dividing the number of pixel intensity values in the mid-range bins by the number of pixel intensity values in the high-range bins. If this ratio is equal to or greater than 2.0, then the auto-gain used to conduct the preview scan is deemed to be satisfactory. This
20 determination, as indicated, may be based on empirical data from successful scans under various conditions of dyes, excitation sources, and other factors; on knowledge of expected ratios of background pixels to probe pixels; on knowledge of expected intensity ranges of fluorescent signals; and/or other considerations. Various other tests or comparisons may be applied. For example, if the number of intensity values in bin
25 15 is above some threshold expected value, then it may be concluded that saturation has occurred and that the auto gain used in the preview scan was too high. Similarly, a high number of intensity values in bin 1 may indicate that the auto gain was set too low. Many varieties and combinations of such tests and comparisons will now be appreciated by those of ordinary skill in the relevant art based on the present description.

If the ratio mentioned above is less than 2.0 in this specific example, controller 1130 concludes that the auto gain used for the preview scan was too high, thus resulting in a greater than desired or expected number of intensity values in the high-range bins. Alternatively, as noted in one of many alternative or additional tests, controller 1130
5 may draw the same conclusion based on the number of intensity values in the high-range bins. In any event, it is now illustratively assumed that controller 1130 determines that the actual distribution of intensity values did not conform to the expected or desired intensity value distribution because of a surplus of light pixels (see "no" exit from decision element 1440). Controller 1130 then reduces the auto gain in
10 accordance with any of a variety of techniques (see step 1440). For example, controller 1130 may reduce the gain by one-half, i.e., to $35/2 = 17.5$ decibels in an illustrative specific, non-limiting, example. Another preview scan may then be done (see step 1420) using the revised auto gain of 17.5 decibels. If controller 1130 determines that this gain also is too high, then this value may be reduced by about one-half, i.e., to
15 about 9 decibels, and this new auto-gain value used in another preview scan.

Similarly, if the ratio mentioned above exceeds the target ratio value of about 2.0 in this specific example by a threshold amount (e.g., if the ratio is 4.0 or above), controller 1130 may conclude that the auto gain used for the preview scan was too low, thus resulting in a greater than desired or expected number of intensity values in the
20 mid- (and/or low-) range bins. Alternatively, as noted, controller 1130 may draw the same conclusion based on the number of intensity values in the mid- or low-range bins. In any of these cases, controller 1130 consequently increases the auto gain in accordance with any of a variety of techniques (see step 1440 and auto-gain adjuster 1560). For example, controller 1130 may increase the gain by one-half, i.e., to $35 +$
25 $17.5 = 52.5$ decibels in the illustrative example. Another preview scan may then be done (see step 1420) using the revised auto gain of 52.5 decibels. If controller 1130 determines that this gain also is too low, then this value may be further increased by about one-half, and so on. If the new gain is too high, then it may be decreased by half of the difference between it and the previous gain, i.e., from 52.5 decibels to $52.5 -$
30 $(17.5/2) =$ about 44 decibels. This process may be repeated a predetermined number of

times, a number of times selected by user 701, or a number of times computed based on the likelihood of finding a value that meets all tests (see decision element 1445).

It is now illustratively assumed that controller 1130 succeeds in determining an acceptable automatic gain adjustment value (see decision element 1335). Controller
5 1130 may notify user 701 in accordance with known techniques that a gain value has been determined so that user 701 may initiate a scan at nominal resolution (e.g., by selecting "start scan" graphical element 950) using the automatically determined gain value. Alternatively, controller 1130 may automatically initiate a scan at nominal resolution using the automatically determined gain.

10 In the illustrated implementation, controller 1130 allocates a portion of the automatically determined gain value to be applied to emission detector 815 and a portion to be applied to VGA 815 (see step 1350). As in the case of user-selected gains, these apportioned gains typically are applied via an output device of input/output devices 780 (see step 1360). If controller 1130 is not able to automatically determine a
15 gain value, user 701 may be given the opportunity to select a gain value (see element 1337 and step 1307). Alternatively, controller 1130 may notify user 701 of the situation and/or initiate a full resolution scan using the gain value that provided the closest match with the desired pixel distribution.

We refer again to scanner control application 790 described above in connection
20 with controls functions of scanner 160A. As more particularly shown in Figures 8A and 8B, scanner control application 790 in the illustrated implementation includes a GUI manager 810A, which receives one or more user-selected grid aligning parameters. Also included in application 790 is grid aligner 830B, which aligns a grid with a first image. Another element of application 790 in this implementation is image analysis
25 manager 850 that includes image analyzer 852, image analysis data storer 855, and multiple scan alignment controller 860. Image analyzer 852 generates grid alignment data based on the alignment of the grid with the first image. Image analysis data storer 855 stores the grid alignment data in memory, such as in illustrative image A analysis data file 799A that, as shown in Figure 7, may be stored in system memory 720 of
30 computer 100B. Multiple scan alignment controller 860 in this implementation

retrieves the grid alignment data (e.g., from file 799A) responsive to an indication to align a second image. Image analyzer 852 analyzes the second image based on the retrieved grid alignment data. These operations are now further described with reference to the GUI of Figure 16 and the illustrative images of Figures 16A and 16B.

- 5 The relations of these operations to method steps of the illustrative flow chart of Figure 16C are parenthetically indicated.

In the present example, it is illustratively assumed that GUI manager 810A provides GUIs 782A and 782B (Figures 9, 9A and 9B) to user 701, typically in response to a user selection. User 701 employs GUI 782 to select illustrative grid aligning
10 parameters (see corresponding step 1610 of Figure 16C). For example, user 701 may select whether grid alignment is to be done using a fixed algorithm shape with an "easy" threshold, a fixed algorithm shape with "tight" threshold, a variable algorithm shape with easy threshold, or a variable algorithm shape with tight threshold. In the illustrated implementation, a selection of "variable circle size," for instance, indicates that grid
15 aligner 830B should use circles of varying diameter independently to identify pixels to represent each probe feature in the array image.

For example, Figure 16A shows variable algorithm circles 1130 such that each circle may encompass a variable number of pixels to represent the probe encircled probe feature. A "tight" threshold means that the circle should tend to be drawn around the
20 brightest group of pixels and not include dimmer pixels that could be encompassed, for example, by a larger diameter circle. An "easy" threshold means that the dimmer pixels should tend to be included within the circle. Figure 16B shows fixed algorithm circles 1632, all of which are a same diameter, which may be user selected in some implementations. In this context, a tight threshold means that the circles tend to be
25 centered around the brightest group of pixels, whereas an easy threshold means that dimmer pixels tend to be included in determining the center of the circle. As indicated by graphical element 920, user 701 may also select an estimated feature size. For instance, if the probe features are deposited using a pin, such as ones employed using the Pin-and-Ring™ technology of the Affymetrix® 417™ or 427™ Arrays, then user
30 701 may select a pin size, e.g., 125-microns as shown in element 920.

It is now illustratively assumed that GUI manager 810A provides GUI 782B of Figure 16 to user 701, also typically in response to a user selection. User 701 employs GUI 782B to select a number of images to generate by scanning (see step 1615). For example, graphical elements 1629 are provided in this example so that user 701 may enter any positive integer number (that may, of course, be limited based on practicalities of scanning, storing data, and so on) to indicate the number of images. Using tabs 1619 (1619A and 1619B), or other conventional techniques, user 701 may provide further options for specifying scan parameters such as the gain to be employed (see graphical element 1639).

10 In some implementations, each of the scans will be done on a same probe array. For example, one scan may be done using excitation source 420A and another scan may be done using excitation source 420B. Because the same probe features are scanned in both cases, they are thus generally assured to be in the same locations. Therefore, although the images generally will not be the same (since one excitation source elicits
15 emissions of one wavelength providing one image and the other excitation source elicits emissions of another wavelength to provide another image), an alignment grid based on one of the images may be applied to the other image (or multiple other images using, for instance, multiple additional excitation sources) due to the commonality of probe feature locations. Moreover, in some implementations, the images need not be scanned
20 from the same probe array. Rather, for example, arrayer 120 may be programmed to deposit spots in particular locations in the same pattern on multiple slides and/or on multiple spotted probe arrays on a same slide. Thus, probe feature locations thus may generally be expected to be the same, or close to the same, in the multiple spotted probe arrays. Commonality of probe feature locations also typically may be achieved with
25 substantial precision in synthesized arrays. Thus, implementations described herein in which multiple images are described as being scanned from a same array will be understood to be illustrative and non-limiting.

In some implementations, all of the scans may be done before further processing by application 790 (see steps 1620 and 1625). However, it need not be so; rather, an

image may be scanned and analyzed, then another scanned and analyzed, and so on in any sequence.

As noted, grid aligner 830B aligns a grid with a first image. Any technique for aligning a grid with an image, now available or to be developed in the future, may be employed by aligner 830B. As one non-limiting example, aligner 830 may employ the techniques and methods described in U.S. Patent Application, Serial No. 09/681,819, incorporated by reference, and/or the techniques and methods described in U.S. Patent No. 6,090,555, hereby incorporated herein by reference in its entirety for all purposes. Examples of alignment grids superimposed on a scanned image are shown as grid 1610A of Figure 16A and grid 1610B of Figure 16B. Although grids 1610A or 1610B of these figures are shown as consisting of horizontal and parallel lines, other grid configurations may be employed in other implementations.

Referring again to Figure 8B, image analysis manager 850 includes image analyzer 852, which generates grid alignment data for a particular image, referred to as a "first image" or, "image A," based on the alignment by grid aligner 830B of a grid with the first image (see step 1640 in Figure 16C). This alignment of a grid with image A may be initiated by a user selection of an appropriate element in an interface (see decision element 1630 in Figure 16C) or, in other implementations, it may be initiated automatically by application 790 when scanning is completed or at the occurrence of another event. It will be understood that the terms "first image," or "image A," are applied to distinguish this image from other images, and are not intended to limit the image to the first one scanned in time or to any other particular image. Rather, any of the N images selected by user 701 may be used as this "first image" or "image A." Grid alignment data generated by analyzer 852 typically includes data to identify the pixels associated with each probe feature for purposes of analysis (such as gene expression analysis) and thus distinguish the pixels of one probe feature from the pixels of other probe features and from background pixels.

In the present illustrative implementation, the grid alignment data based on image A is stored by storer 855 in any appropriate file, data structure, or in accordance with other conventional techniques for storing information (see step 1645 in Figure

16C). For example, the data may be stored in an analysis data file 799 corresponding to image A, i.e., file 799A. Other analysis information, such as the distribution of pixel intensities in probe features of image A typically are also stored in, for example, records of file 799A corresponding to each of the probe features.

5 Multiple scan alignment controller 860 (shown in Figure 8B) retrieves the grid alignment data (e.g., from file 799A, see step 1635 in Figure 16C), which may be done automatically or responsive to a user-selected indication to align a second image (see decision element 1650). Image analyzer 852 analyzes the second image (and other of the user-selected N images) based on the retrieved grid alignment data (see steps 1655
10 and 1660 in Figure 16C). Image analysis data storer 855 stores the resulting analysis data in a file, appropriate data structure, or in accordance with other conventional techniques (see element 1665 in Figure 16C).

Having described various embodiments and implementations of the present invention, it should be apparent to those skilled in the relevant art that the foregoing is
15 illustrative only and not limiting, having been presented by way of example only. Many other schemes for distributing functions among the various functional elements of the illustrated embodiment are possible in accordance with the present invention. The functions of any element may be carried out in various ways in alternative embodiments. Also, the functions of several elements may, in alternative embodiments,
20 be carried out by fewer, or a single, element.

For example, for purposes of clarity the functions of computer 100B and scanner 160A are described as being implemented by the functional elements shown in Figure 8. However, aspects of the invention need not be divided into these distinct functional elements. Similarly, operations of a particular functional element that are described
25 separately for convenience need not be carried out separately. For example, some or all of the functions of CPLD 830 could be implemented by process controller 740, and vice versa. Similarly, in some embodiments, any functional element may perform fewer, or different, operations than those described with respect to the illustrated embodiment. Also, functional elements shown as distinct for purposes of illustration may be
30 incorporated within other functional elements in a particular implementation. For

example, filters 810 and/or 820 may be components of amplifier 815, although they are shown separately in Figure 8 for purposes of illustration. Also, a user may provide gain and scan data at the same time as scan initiation data.

Similarly, for example, arrayer manager application 290 is described as
5 executing on computer 100A that controls arrayer 120, and scanner control application 790 is described as executing on computer 100B that control scanner 160A. However, aspects of the invention need not be divided into these distinct functional elements. Rather, for example, applications 290 and 790 could be executed on a same computer that may, for example, control both arrayer 120 and scanner 160A. Moreover,
10 applications 290 and 790 may be part of a same computer program product irrespective of whether they are executed on a same, or different, computers.

Also, the sequencing of functions or portions of functions generally may be altered. For example, the method steps shown in Figure 11A generally need not be carried out in the order suggested by this figure. Among many possible examples, steps
15 1130A and 1140A could be combined or carried out in parallel, steps 1130A and 1140A could be carried out after steps 1125A and 1127A, and so on.

Also, the sequencing of functions or portions of functions generally may be altered. For example, the method steps shown in Figures 12A-C and 13 generally need not be carried out in the order suggested by the figures. Among many possible
20 examples, the steps and decision elements of Figure 13 could be included in Figure 12C, steps 1350 and 1360 could be combined or carried out in parallel, and so on.

In addition, it will be understood by those skilled in the relevant art that control and data flows between and among functional elements of the invention and various data structures may vary in many ways from the control and data flows described above.
25 More particularly, intermediary functional elements (not shown) may direct control or data flows, and the functions of various elements may be combined, divided, or otherwise rearranged to allow parallel processing or for other reasons. Also, intermediate data structures or files may be used, various described data structures or files may be combined, the sequencing of functions or portions of functions generally
30 may be altered, and so on. Numerous other embodiments, and modifications thereof,

are contemplated as falling within the scope of the present invention as defined by appended claims and equivalents thereto.

Copyright Statement

A portion of the disclosure of this patent document contains material that is
5 subject to copyright protection. The copyright owner has no objection to the facsimile reproduction by anyone of the patent document or the patent disclosure as it appears in the Patent and Trademark Office patent file or records, but otherwise reserves all copyright rights whatsoever.

What is claimed is:

CLAIMS

1. A computer program product for adjusting the gain of a scanner having one or more excitation sources, an emission detector having a first gain, and a variable
5 gain element having a second gain, wherein the computer program product, when executed on a computer system, performs a method comprising:

(a) providing a first user interface constructed and arranged to enable a user to select a user-selected gain value;

(b) receiving the user-selected gain value;

10 (c) adjusting the first gain based, at least in part, on a first portion of the user-selected gain value; and

(d) adjusting the second gain based, at least in part, on a second portion of the user-selected gain value.

15 2. The computer program product of claim 1, wherein the adjusting (c) includes:

(i) determining the first portion to be equal to a no-change value when the user-selected gain value is equal to or less than a threshold value, and

(ii) determining the first portion to be equal to an excess of the user-selected
20 gain value over the threshold value, when the user-selected gain value is greater than the threshold value; and

wherein the adjusting (d) includes:

(i) determining the second portion to be equal to the user-selected gain value when the user-selected gain value is equal to or less than a threshold value, and

25 (ii) determining the second portion to be equal to the threshold value when the user-selected gain value is equal to or greater than the threshold value.

3. The computer program product of claim 2, wherein the threshold value is predetermined.

4. The computer program product of claim 1, wherein the adjusting (c) includes:

(i) determining the first portion to be equal to the user-selected gain value when the user-selected gain value is equal to or less than a threshold value, and

5 (ii) determining the first portion to be equal to the threshold value when the user-selected gain value is equal to or greater than the threshold value; and

wherein the adjusting (d) includes:

(i) determining the second portion to be equal to a no-change value when the user-selected gain value is equal to or less than a threshold value, and

10 (ii) determining the second portion to be equal to an excess of the user-selected gain value over the threshold value, when the user-selected gain value is greater than the threshold value.

5. The computer program product of claim 4, wherein the threshold value is
15 predetermined.

6. The computer program product of claim 1, wherein the method further comprises:

(e) receiving a calibration gain for a first of the one or more excitation sources,
20 wherein the calibration gain is based, at least in part, on an output of the emission detector responsive to the first excitation source exciting a calibration source; and

(f) adjusting the first gain, the second gain, or both based, at least in part, on the calibration gain.

25 7. The computer program product of claim 6, wherein the calibration gain is based on a measurement that depends, at least in part, on the output of the emission detector.

8. The computer program product of claim 1, wherein the first user interface further is constructed and arranged to enable the user to associate the user-selected gain value with a first of the one or more excitation sources;

the receiving (b) further includes receiving from the first user interface the
5 association of the user-selected gain value with the first excitation source; and
the adjusting (c) and (d) are done when the first excitation source is operational.

9. The computer program product of claim 8, wherein the user associates the user-selected gain value with the first excitation source based, at least in part, on
10 identifying a scanning operation in which the first excitation source is operational.

10. The computer program product of claim 1, wherein
the first user interface further is constructed and arranged to enable the user to associate the user-selected gain value with a first of one or more emission labels;
15 the receiving (b) further includes receiving from the first user interface the association of the user-selected gain value with the first emission label; and
the adjusting (c) and (d) are done when the first emission label is excited in a scanning operation.

20 11. The computer program product of claim 1, wherein the method further comprises:

(e) providing a second user interface constructed and arranged to enable a user to initiate a scanning operation; and the receiving (b) further comprises

(i) receiving the user-selected gain value from the first user interface and storing
25 the user-selected gain value in a memory storage unit, and

(ii) retrieving the user-selected gain value from the memory storage unit responsive to the user initiating a scanning operation.

12. The computer program product of claim 1, wherein the first and second
30 user interfaces are included in a same user interface.

13. The computer program product of claim 1, wherein the emission detector includes a photomultiplier tube.

5 14. The computer program product of claim 1, wherein the first gain amplifies an emission signal based, at least in part, on emissions from an emission label spatially associated with a probe of a probe array.

15 15. The computer program product of claim 14, wherein the probe array is a spotted probe array.

16. The computer program product of claim 14, wherein the probe array is a synthesized probe array.

15 17. A computer program product for adjusting the gain of a scanner having one or more excitation sources, an emission detector having a first gain, and a variable gain element having a second gain, wherein the computer program product, when executed on a computer system, performs a method comprising:

20 (a) receiving one or more user-selected gain values from one or more ranges of gain values;

(b) adjusting the first gain based, at least in part, on a first of the one or more user-selected gain values; and

(c) adjusting the second gain based, at least in part, on a second of the one or more user-selected gain values.

25

18. The computer program product of claim 17, wherein the method further comprises:

(d) receiving a calibration gain for a first of the one or more excitation sources, wherein the calibration gain is based, at least in part, on an output of the emission
30 detector responsive to the first excitation source exciting a calibration source; and

(e) adjusting the first gain, the second gain, or both based, at least in part, on the calibration gain.

19. The computer program product of claim 17, wherein the user interface further is
5 constructed and arranged to enable the user to associate the first user-selected gain value with a first of the one or more excitation sources;

the receiving (a) further includes receiving from the user interface the
association of the first user-selected gain value with the first excitation source; and
the adjusting (b) and (c) are done when the first excitation source is operational.

10

20. A computer program product for adjusting the gain of a scanner having
one or more excitation sources, an emission detector having a first gain, and a variable
gain element having a second gain, wherein the computer program product, when
executed on a computer system, performs a method comprising the steps of:

15 (a) receiving a user-selected gain value;

(b) adjusting the first gain based, at least in part, on a first portion of the user-
selected gain value, including

(i) determining the first portion to be equal to a no-change value when
the user-selected gain value is equal to or less than a threshold value, and

20 (ii) determining the first portion to be equal to an excess of the user-
selected gain value over the threshold value, when the user-selected gain value is greater
than the threshold value;

(c) adjusting the second gain based, at least in part, on a second portion of the
user-selected gain value;

25 (d) receiving a calibration gain for a first of the one or more excitation sources,
wherein the calibration gain is based, at least in part, on an output of the emission
detector responsive to the first excitation source exciting a calibration source; and

(e) adjusting the first gain, the second gain, or both based, at least in part, on the
calibration gain.


30

21. A gain adjustment system, comprising:
a scanner including one or more excitation sources, an emission detector having
a first gain, and a variable gain element having a second gain;
a computer-implemented user interface constructed and arranged to enable a user
5 to select a user-selected gain value; and
scanner control and analysis control logic comprising a user-selected gain data
manager constructed and arranged to receive the user-selected gain value, and a scan
gain controller constructed and arranged to adjust the first gain based, at least in part, on
a first portion of the user-selected gain value, and to adjust the second gain based, at
10 least in part, on a second portion of the user-selected gain value.

22. The system of claim 21, wherein:
the scan gain controller further is constructed and arranged to determine the
second portion to be equal to the user-selected gain value, and the first portion to be a
15 no-change value, when the user-selected gain value is equal to or less than a threshold
value; and to determine the second portion to be equal to the user-selected gain value,
and the first portion to be equal to an excess of the user-selected gain value over the
threshold value, when the user-selected gain value is greater than the threshold value.

20 23. The system of claim 21, wherein:
the scan gain controller further is constructed and arranged to determine the first
portion to be equal to the user-selected gain value, and the second portion to be a no-
change value, when the user-selected gain value is equal to or less than a threshold
value; and to determine the first portion to be equal to the user-selected gain value, and
25 the second portion to be equal to an excess of the user-selected gain value over the
threshold value, when the user-selected gain value is greater than the threshold value.

24. The system of claim 21, wherein:
the scan gain controller further is constructed and arranged to receive a
30 calibration gain for a first of the one or more excitation sources, wherein the calibration

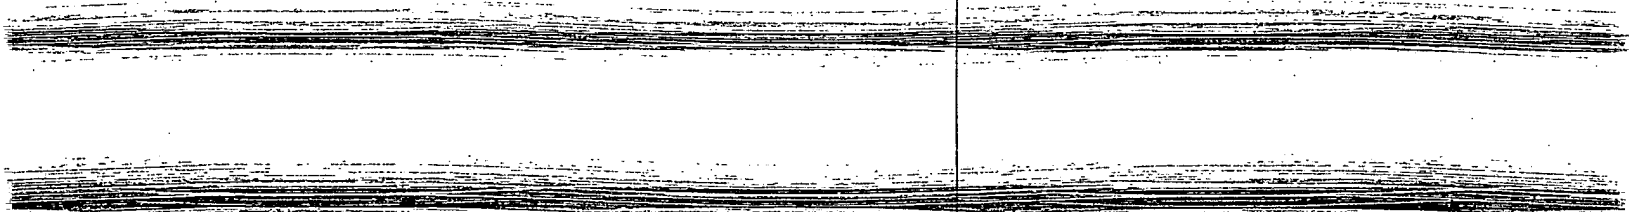

gain is based, at least in part, on an output of the emission detector responsive to the first excitation source exciting a calibration source; and to adjust the first gain, the second gain, or both based, at least in part, on the calibration gain.

- 5 25. A method for adjusting the gain of a scanner having one or more excitation sources, an emission detector having a first gain, and a variable gain element having a second gain, comprising:
- (a) receiving a user-selected gain value;
 - (b) adjusting the first gain based, at least in part, on a first portion of the user-
 - 10 selected gain value; and
 - (c) adjusting the second gain based, at least in part, on a second portion of the user-selected gain value.

26. The method of claim 25, wherein the adjusting (b) and (c) include the
- 15 step of allocating the user-selected gain between the first and second portions based, at least in part, on one or more operational characteristics of the emission detector.

27. The method of claim 26, wherein the operational characteristics include signal to noise ratio.
- 20

28. A computer program product for adjusting the gain of a scanner having one or more excitation sources, an emission detector having a first gain, and a variable gain element having a second gain, wherein the computer program product, when executed on a computer system, performs a method comprising:
- 25 (a) selecting an auto-gain value;
- (b) adjusting the first gain based, at least in part, on a first portion of the auto-gain value;
 - (c) adjusting the second gain based, at least in part, on a second portion of the auto-gain value;

(d) causing the scanner to collect a plurality of sample pixel intensity values using the adjusted first and second gains;

(e) determining a comparison measure based on comparing one or more of the plurality of sample pixel intensity values to one or more of a plurality of desired pixel intensity values; and

(f) adjusting the auto-gain value based on the comparison measure.

29. A gain adjustment system, comprising:

a scanner having one or more excitation sources, an emission detector having a first gain, and a variable gain element having a second gain; and

a scanner control and analysis control logic comprising a scan gain controller constructed and arranged to

(i) select an auto-gain value,

(ii) adjust the first gain based, at least in part, on a first portion of the auto-gain value;

(iii) adjust the second gain based, at least in part, on a second portion of the auto-gain value;

(iv) cause the scanner to collect a plurality of sample pixel intensity values using the adjusted first and second gains;

(v) determine a comparison measure based on comparing one or more of the plurality of sample pixel intensity values to one or more of a plurality of desired pixel intensity values; and

(vi) adjust the auto-gain value based on the comparison measure.

30. A method for adjusting the gain of a scanner having one or more excitation sources, an emission detector having a first gain, and a variable gain element having a second gain, comprising:

(a) selecting an auto-gain value;

(b) adjusting the first gain based, at least in part, on a first portion of the auto-gain value;

(c) adjusting the second gain based, at least in part, on a second portion of the auto-gain value;

(d) causing the scanner to collect a plurality of sample pixel intensity values using the adjusted first and second gains;

5 (e) determining a comparison measure based on comparing one or more of the plurality of sample pixel intensity values to one or more of a plurality of desired pixel intensity values; and

(f) adjusting the auto-gain value based on the comparison measure.

10 31. A computer program product, comprising:

(a) a gain-value receiver that receives a user-selected gain value;

(b) a first gain controller that applies a first gain to the emission signal based, at least in part, on a first portion of the user-selected gain value; and

15 (c) a second gain controller that applies a second gain to the emission signal based, at least in part, on a second portion of the user-selected gain value.

32. A method for adjusting an emission signal, comprising the steps of:

(a) receiving a user-selected gain value;

20 (b) applying a first gain to the emission signal based, at least in part, on a first portion of the user-selected gain value; and

(c) applying a second gain to the emission signal based, at least in part, on a second portion of the user-selected gain value.

33. A computer program product, comprising:

25 (a) an auto-gain value selector;

(b) a first gain controller that applies a first gain to the emission signal based, at least in part, on a first portion of the auto-gain value;

(c) a second gain controller that applies a second gain to the emission signal based, at least in part, on a second portion of the auto-gain value;

(d) an intensity manager that determines a plurality of sample pixel intensity values based on the emission signal having applied to it the first and second gains;

(e) a comparison manager that determines a comparison measure based on comparing one or more of the plurality of sample pixel intensity values to one or more
5 of a plurality of desired pixel intensity values; and

(f) an auto-gain adjuster that adjusts the auto-gain value based on the comparison measure.

34. A method for adjusting an emission signal, comprising the steps of:

10 (a) selecting an auto-gain value;

(b) applying a first gain to the emission signal based, at least in part, on a first portion of the auto-gain value;

(c) applying a second gain to the emission signal based, at least in part, on a second portion of the auto-gain value;

15 (d) determining a plurality of sample pixel intensity values based on the emission signal having applied to it the first and second gains;

(e) determining a comparison measure based on comparing one or more of the plurality of sample pixel intensity values to one or more of a plurality of desired pixel intensity values; and

20 (f) adjusting the auto-gain value based on the comparison measure.

35. A gain adjustment system, comprising:

(a) a scanner having one or more excitation sources, an emission detector having a first gain, and a variable gain element having a second gain; and

25 (b) a scan gain controller that adjusts the first and second gains.

36. A gain adjustment system, comprising:

a scanner means having one or more excitation source means, an emission detector means having a first gain, and a variable gain element means having a second
30 gain; and

a scan gain control means for adjusting the first and second gains.

37. A method comprising:

- 5 (a) receiving location data corresponding to a plurality of probe-feature locations on a substrate;
- (b) storing the location data;
- (c) accessing the location data; and
- (d) scanning the substrate based, at least in part, on the accessed location data.

10 38. The method of claim 37, wherein the receiving (a) includes providing a first user interface that enables user specification of the probe feature locations.

39. The method of claim 38, wherein the accessing step (c) includes

- 15 (i) providing a second user interface that enables user selection of the location data; and
- (ii) accessing the location data based, at least in part, on the user selection.

40. The method of claim 38, wherein the first user interface enables user

20 specification of the probe-feature locations by specifying one or more spacing distances between probe features.

41. The method of claim 38, wherein the first user interface enables user

specification of the one or more probe-feature locations by specifying one or more

25 patterns of probe feature locations.

42. The method of claim 38, wherein the first user interface enables user

specification of the one or more probe-feature locations by specifying coordinates.

43. The method of claim 42, wherein the coordinates include x and y coordinates.

44. The method of claim 42, wherein the coordinates include user-specified
5 coordinates of a reference point on the substrate.

45. The method of claim 42, wherein:
the coordinates include user-specified coordinates of one or more probe-feature
locations on the substrate.

10

46. The method of claim 37, wherein the storing (b) includes storing the
location data in an array content file in a memory unit of a first computer.

47. The method of claim 46, wherein:
15 the first computer is constructed and adapted to control an arrayer.

48. The method of claim 47, wherein:
step (c) includes
(i) transferring the location data from the first computer to a memory unit
20 of a second computer;
(ii) providing a second user interface that enables user selection of the
location data; and
(iii) accessing the location data from the memory unit of the second
computer based, at least in part, on the user selection.

25

49. The method of claim 48, wherein the second computer is constructed and
adapted to control a scanner.

50. The method of claim 37, wherein the probe-feature locations include
30 locations of probes of a spotted array.

51. The method of claim 37, wherein the probe-feature locations include locations of probes of a synthesized array.

5 52. A method comprising the steps of:

(a) accessing location data corresponding to a plurality of probe-feature locations on a substrate, wherein the location data is stored in a memory unit of a computer; and

(b) scanning the substrate based, at least in part, on the accessed location data.

10

53. A computer program product comprising:

(a) an arrayer manager application constructed and arranged to

(i) receive location data corresponding to a plurality of probe-feature locations on a substrate, and

15

(ii) store the location data; and

(b) a scanner control application constructed and arranged to

(i) access the location data, and

(ii) cause scanning of the substrate based, at least in part, on the accessed location data.

20

54. A computer program product, comprising:

(a) a user-interface manager that

(i) enables user specification of a plurality of probe-feature locations on a substrate, and

25

(ii) provides location data corresponding to the probe-feature locations;

(b) a data storage manager that stores the location data in a memory unit; and

(c) an output manager enabled to provide the location data to a scanner control application constructed and arranged to cause scanning of the substrate based, at least in part, on the accessed location data.

30

55. The computer program product of claim 54, wherein:
the user interface manager enables user specification of the probe-feature
locations by specifying one or more spacing distances between probe features.

5 56. The computer program product of claim 54, wherein:
the user interface manager enables user specification of the one or more probe-
feature locations by specifying one or more patterns of probe feature locations.

57. The computer program product of claim 54, wherein:
10 the user interface manager enables user specification of the one or more probe-
feature locations by specifying coordinates.

58. A computer program product, comprising:
(a) a data retriever that accesses location data corresponding to a plurality of
15 probe-feature locations on a substrate; and
(b) a scan-area controller that controls scanning of the substrate based, at least in
part, on the accessed location data.

59. The computer program product of claim 58, wherein:
20 the location data is stored in a memory unit of a first computer.

60. The computer program product of claim 59, wherein:
the first computer is constructed and adapted to control an arrayer.

25 61. The computer program product of claim 60, wherein:
the data retriever provides a user interface that enables user selection of the
location data, and accesses the location data based, at least in part, on the user selection.

62. The computer program product of claim 61, wherein:

the data retriever receives the location data from the first computer and stores the location data in a memory unit of a second computer.


63. The computer program product of claim 62, wherein:
5 the second computer is constructed and adapted to control a scanner.

64. A scanning system, comprising:
(a) a scanner; and
(b) a computer program product, comprising
10 (i) a data retriever that accesses location data corresponding to a plurality of probe-feature locations on a substrate, and
(ii) a scan-area controller that controls scanning by the scanner of the substrate based, at least in part, on the accessed location data.

65. A scanning system, comprising:
(a) a computer;
(b) a scanner; and
(c) a computer program product that, when executed on the computer, performs a method comprising the steps of
15 (i) accessing location data corresponding to a plurality of probe-feature locations on a substrate, and
(ii) controlling scanning by the scanner of the substrate based, at least in part, on the accessed location data.

66. A scanning system, comprising:
a scanner means; and
a computer means including a data retriever means for accessing location data
corresponding to a plurality of probe-feature locations on a substrate, and a controller
means for controlling scanning by the scanner of the substrate using the accessed
20 location data.
30

67. A scanning system, comprising:
a scanner means; and
a computer means capable of executing a computer program product means for
5 performing a method comprising the steps of (i) accessing location data corresponding
to a plurality of probe-feature locations on a substrate, and (ii) controlling scanning by
the scanner of the substrate based, at least in part, on the accessed location data.
68. A method comprising:
10 (a) aligning a grid with a first image;
(b) generating grid alignment data based on the alignment of the grid with the
first image;
(c) storing the grid alignment data in memory;
(d) retrieving the grid alignment data responsive to an indication to analyze a
15 second image; and
(e) analyzing the second image based on the retrieved grid alignment data.
69. The method of claim 68, wherein:
the first image is generated by scanning a first probe array; and
20 the second image is generated by scanning the first probe array.
70. The method of claim 69, wherein:
the first image is generated by scanning the first probe array with a first
excitation beam; and
25 the second image is generated by scanning the first probe array with a second
excitation beam.
71. The method of claim 70, wherein the first excitation beam has a first
wavelength; and the second excitation beam has a second wavelength different from the
30 first wavelength.

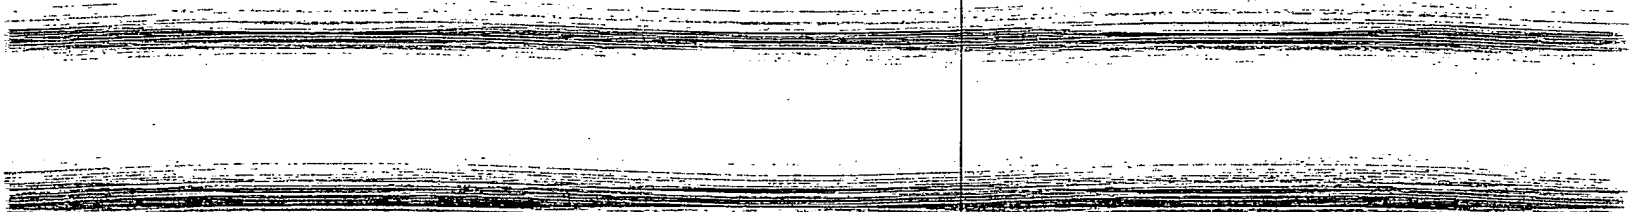72. The method of claim 69, wherein the first probe array is a spotted array.
73. The method of claim 69, wherein the first probe array is a synthesized
5 array.
74. The method of claim 68, further comprising:
(f) receiving one or more user-selected grid aligning parameters.
- 10 75. The method of claim 74, wherein the user-selected grid aligning parameters include any one or more of the group consisting of a fixed algorithm shape with easy threshold, a fixed algorithm shape with tight threshold, a variable algorithm shape with easy threshold, a variable algorithm shape with tight threshold, or an estimated feature size.
- 15 76. The method of claim 74, wherein the user-selected grid aligning parameters include an estimated feature size based on a dimension of a depositing element.
- 20 77. The method of claim 68, further comprising:
(f) scanning a first probe array to generate the first and second images prior to performing the aligning (a).
78. The method of claim 77, wherein the first and second images are scanned
25 sequentially.
79. The method of claim 77, wherein the first and second images are scanned in parallel using two excitation beams.
- 30 80. The method of claim 68, further comprising:
- 

(f) retrieving the grid alignment data responsive to an indication to analyze one or more images in addition to the first and second images; and

(g) analyzing each of the one or more additional images based on the retrieved grid alignment data.

5

81. The method of claim 80, further comprising:

(h) receiving a user selection of a number of images to scan; and

(i) scanning the user-selected number of images.

10

82. The method of claim 81, further comprising:

(j) receiving a user selection of one or more parameters for scanning.

83. The method of claim 82, wherein the one or more parameters for scanning include a gain for one or more of the user-selected number of images.

15

84. The method of claim 82, wherein the one or more parameters for scanning include an indicator of an excitation source for one or more of the user-selected number of images.

20

85. A computer program product comprising:

(a) a grid aligner that aligns a grid with a first image; and

(b) an image analysis manager comprising

(i) an image analyzer that generates grid alignment data based on the alignment of the grid with the first image,

25

(ii) an image analysis data storer that stores the grid alignment data in memory, and

(iii) a multiple scan alignment controller that retrieves the grid alignment data responsive to an indication to analyze a second image;

wherein the image analyzer analyzes the second image based on the retrieved

30 grid alignment data.

86. The computer program product of claim 85, wherein the first image is generated by scanning a first probe array; and the second image is generated by scanning the first probe array.

5

87. The computer program product of claim 85, wherein the first image is generated by scanning a first probe array; and
the second image is generated by scanning a second probe array.

10

88. A scanning system, comprising:

a scanner that scans a first probe array to generate a first image and a second image; and

a programmed computer, comprising

(a) a grid aligner that aligns a grid with the first image; and

15

(b) an image analysis manager including

(i) an image analyzer that generates grid alignment data based on the alignment of the grid with the first image,

(ii) an image analysis data storer that stores the grid alignment data in memory, and

20

(iii) a multiple scan alignment controller that retrieves the grid alignment data responsive to an indication to analyze the second image;

wherein the image analyzer analyzes the second image based on the retrieved grid alignment data.

25

89. The system of claim 88, wherein said scanner is constructed and arranged to scan the first and second images sequentially.

90. The system of claim 88, wherein said scanner is constructed to use two excitation beams for scanning the first and second images in parallel.

30

91. A scanning system, comprising:

a scanner means for scanning a first probe array to generate a first image and a second image; and

a computer means for aligning a grid with the first image; generating grid
5 alignment data based on the alignment of the grid with the first image; storing the grid
alignment data in memory; retrieving the grid alignment data responsive to an
indication to analyze the second image; and analyzing the second image based on the
retrieved grid alignment data.

-10- 92. A computer program product, comprising:

(a) aligning a grid with a first image;

(b) generating grid alignment data based on the alignment of the grid with the
first image;

(c) storing the grid alignment data in memory;

15 (d) retrieving the grid alignment data responsive to an indication to analyze a
second image; and

(e) analyzing the second image based on the retrieved grid alignment data;

wherein the first image is generated by scanning a first probe array and the
second image is generated by scanning a second probe array different from the first
20 probe array.

FIGURE 1

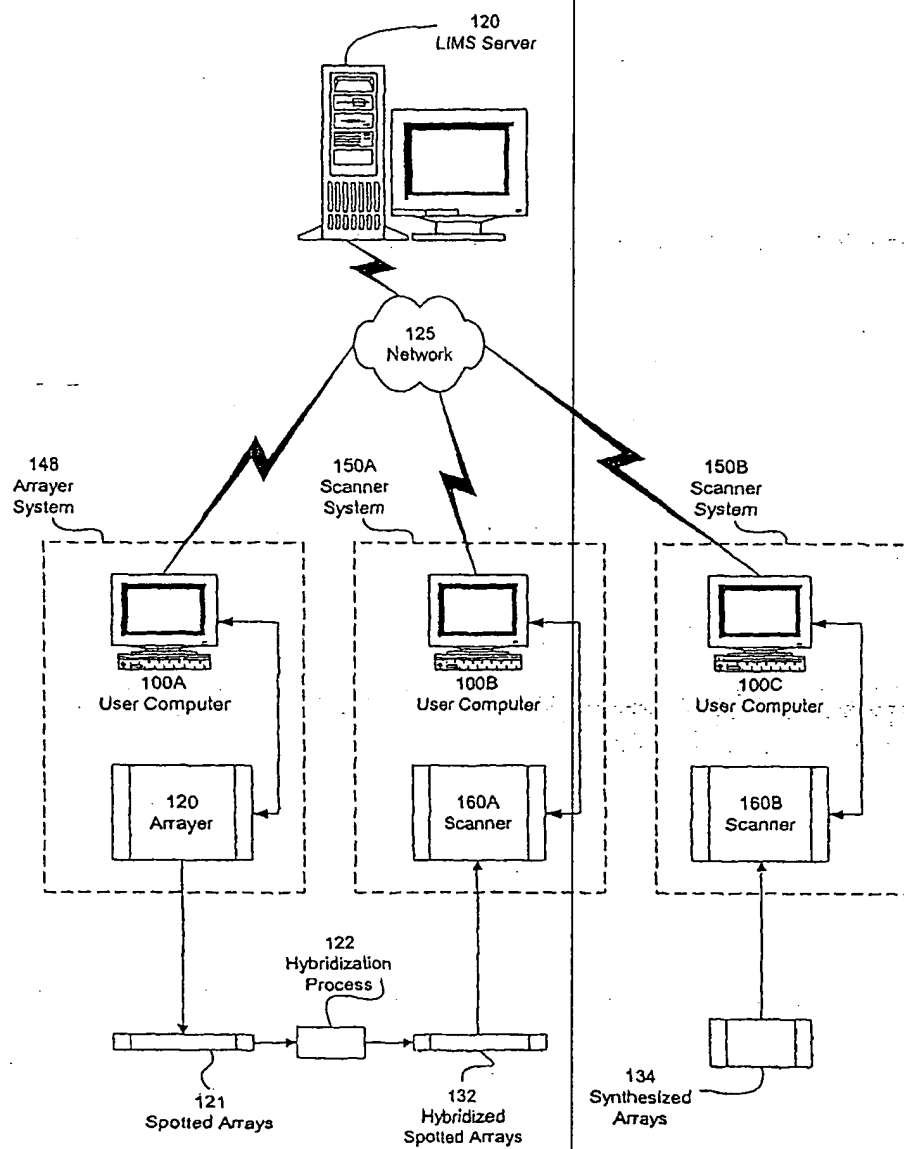
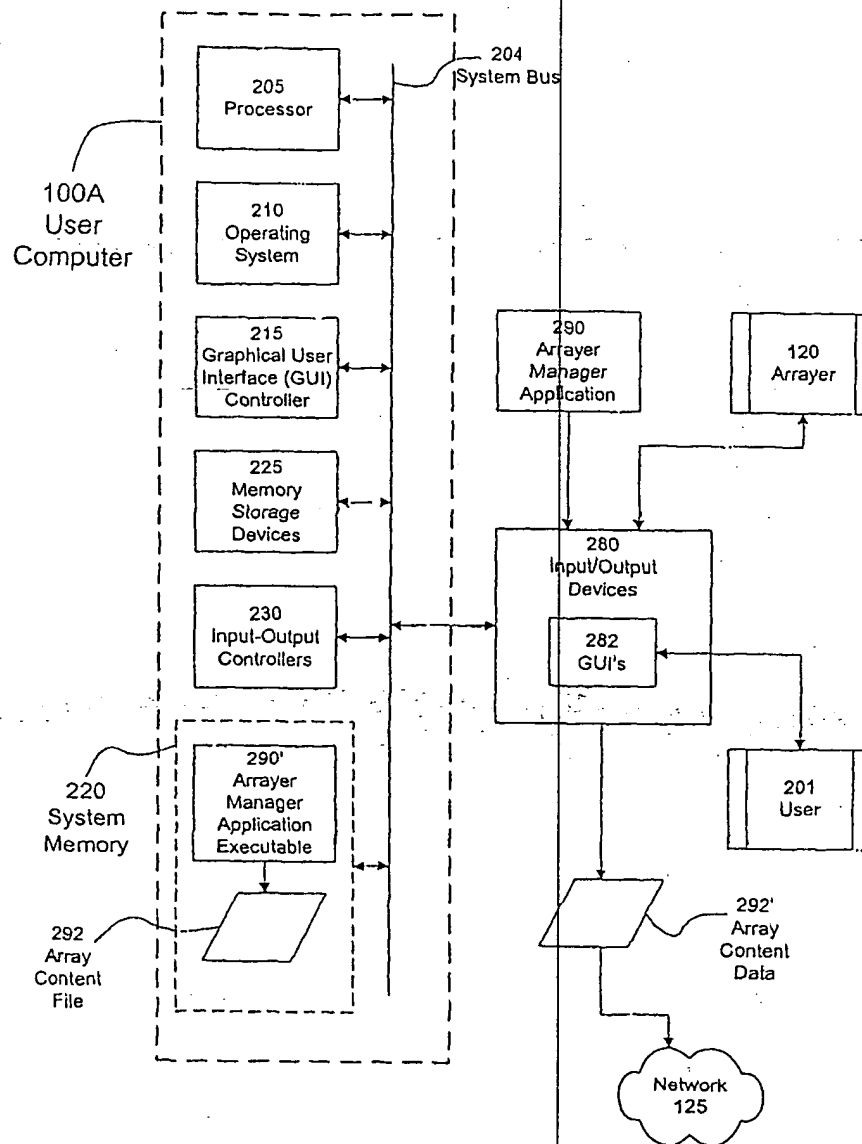


FIGURE 2



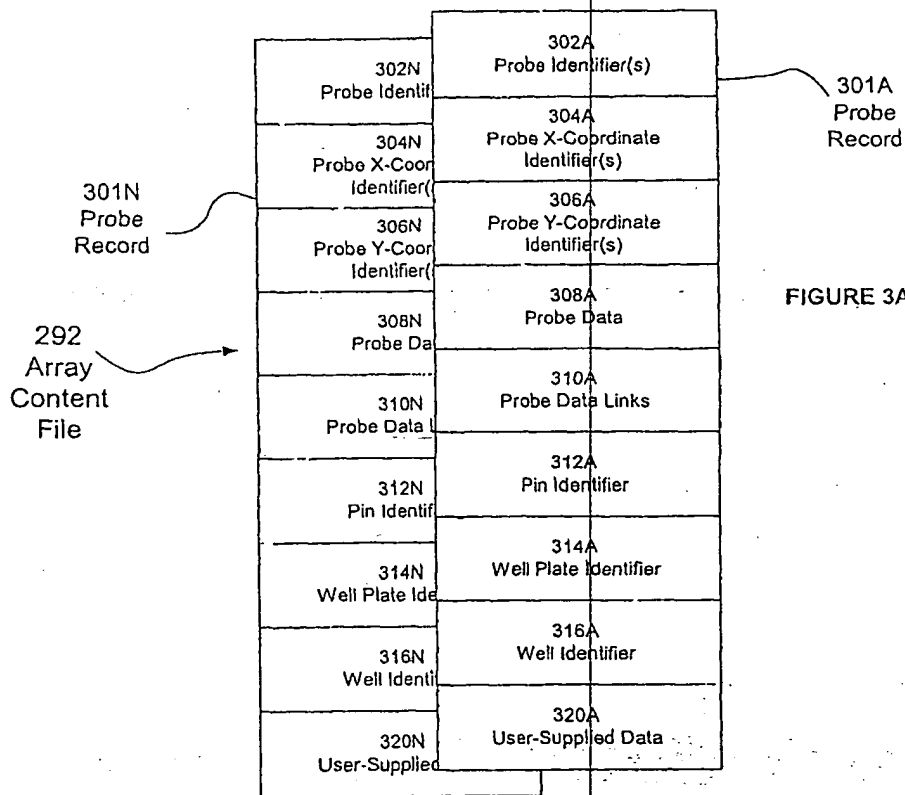


FIGURE 3A

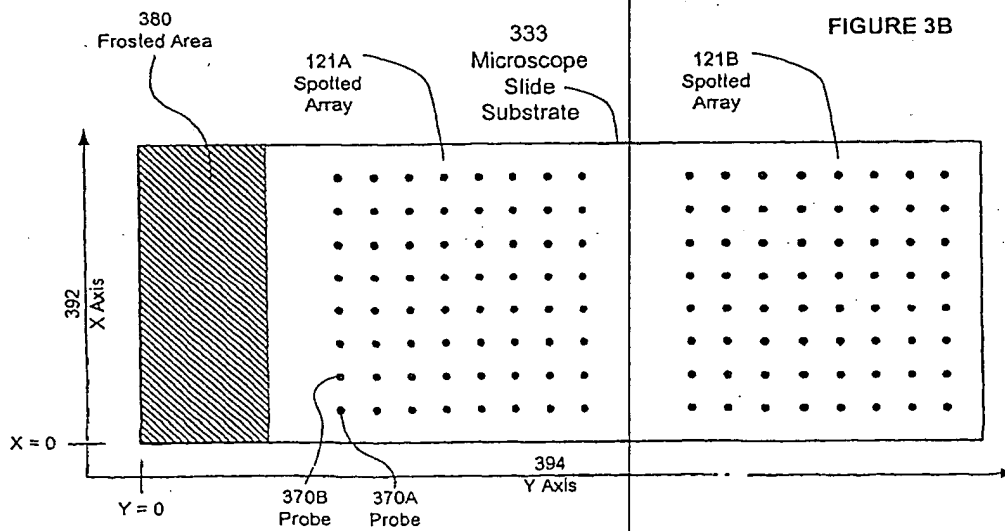


FIGURE 3B

FIGURE 4

400
SCANNER
OPTICS AND DETECTORS

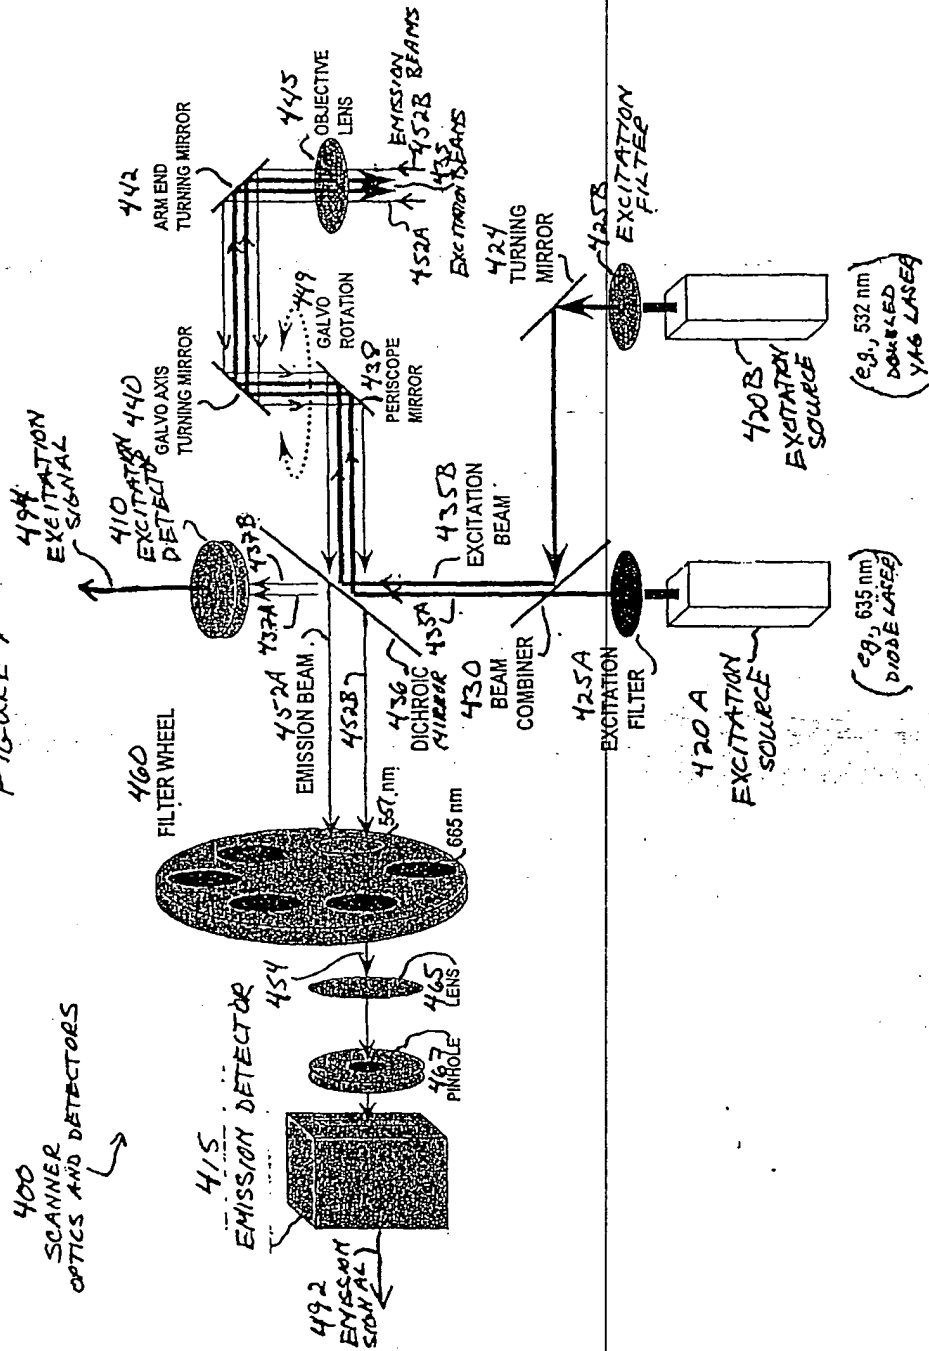


FIGURE 5A

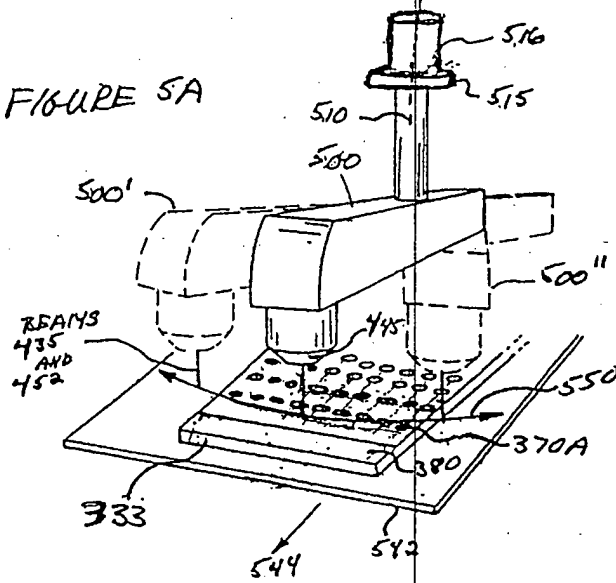
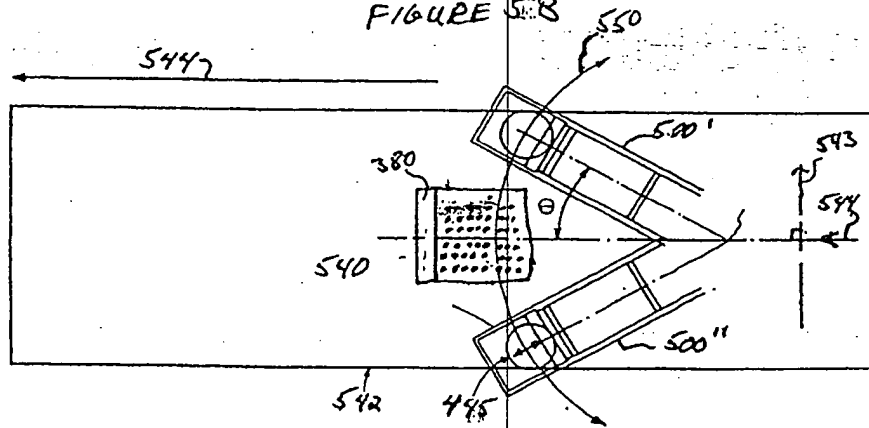


FIGURE 5B



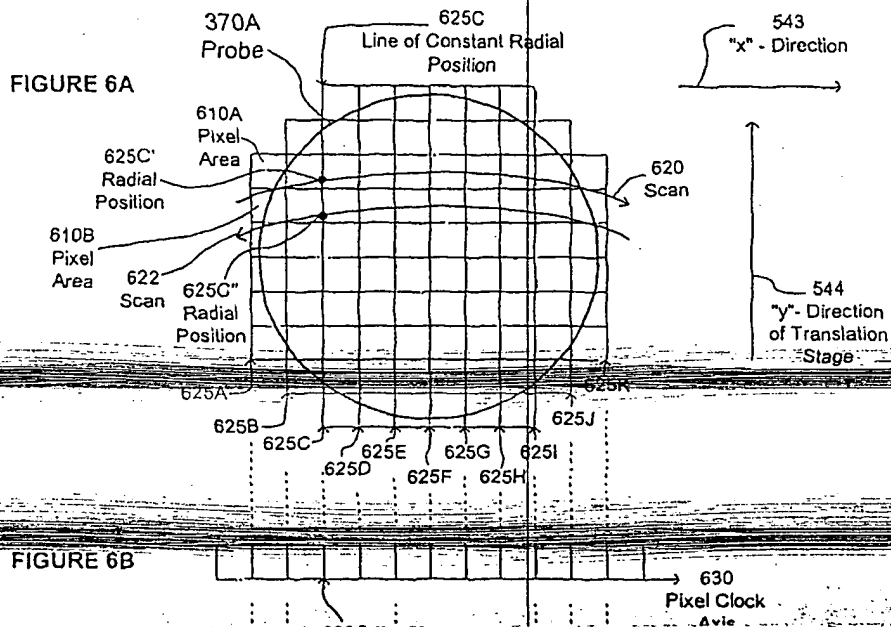


FIGURE 7

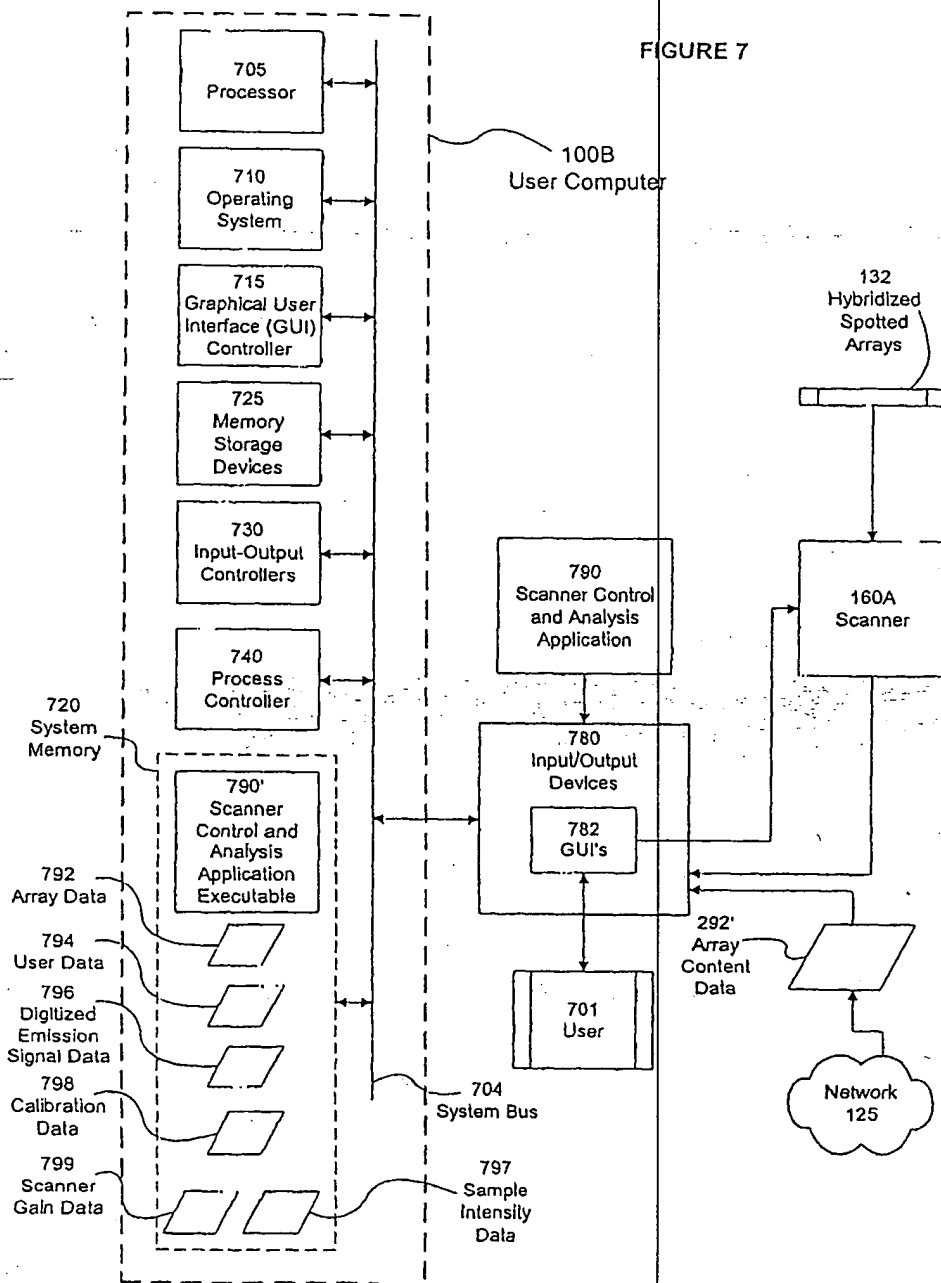


FIGURE 8

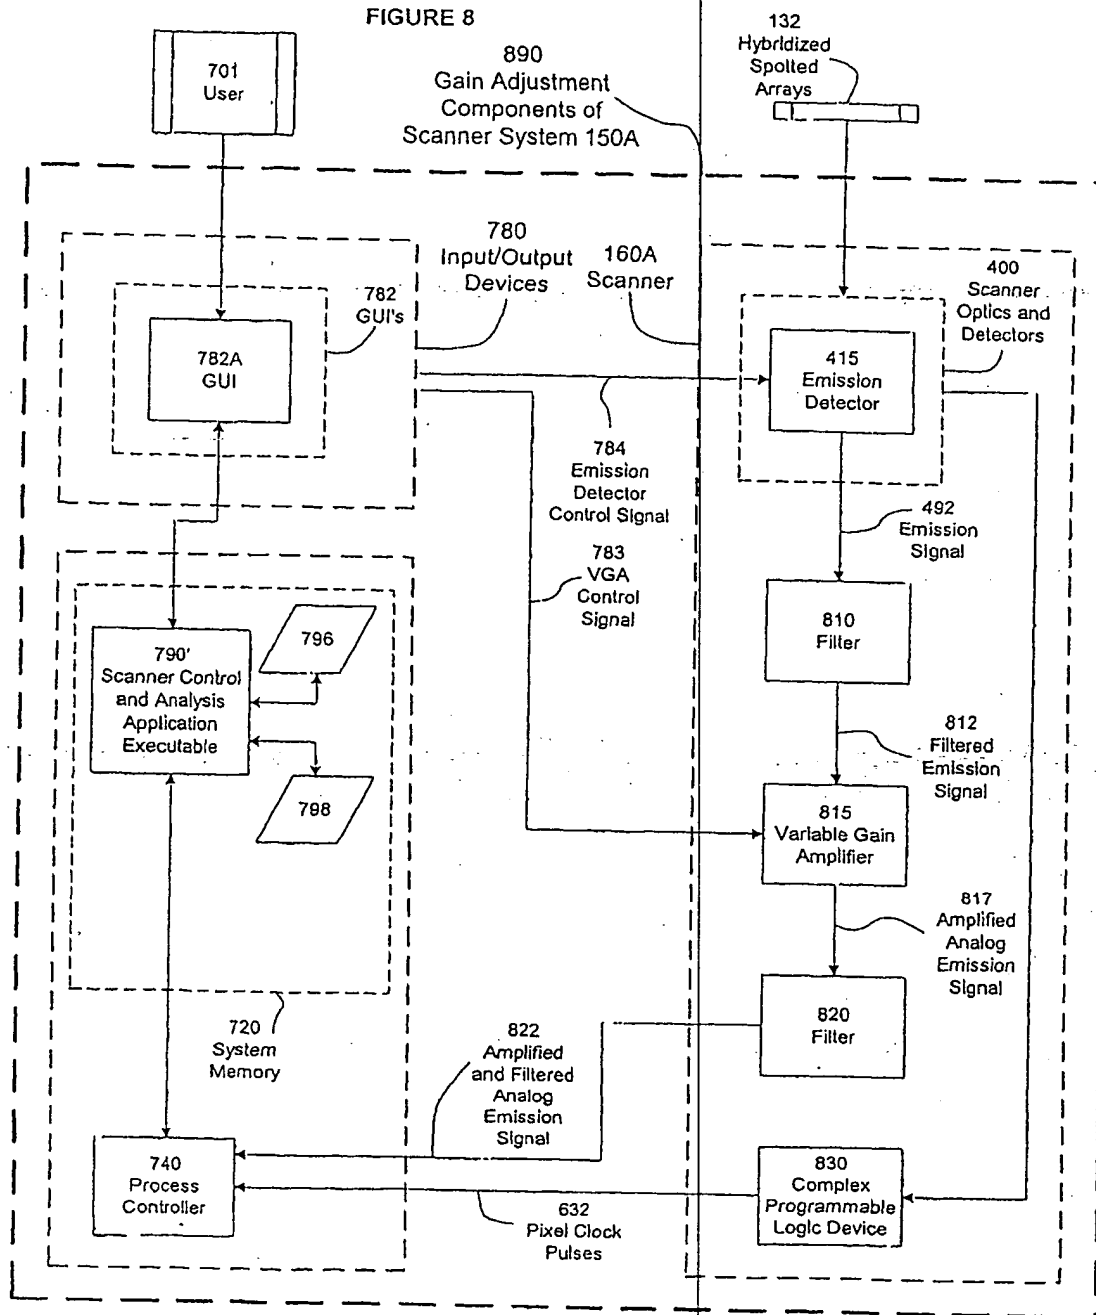
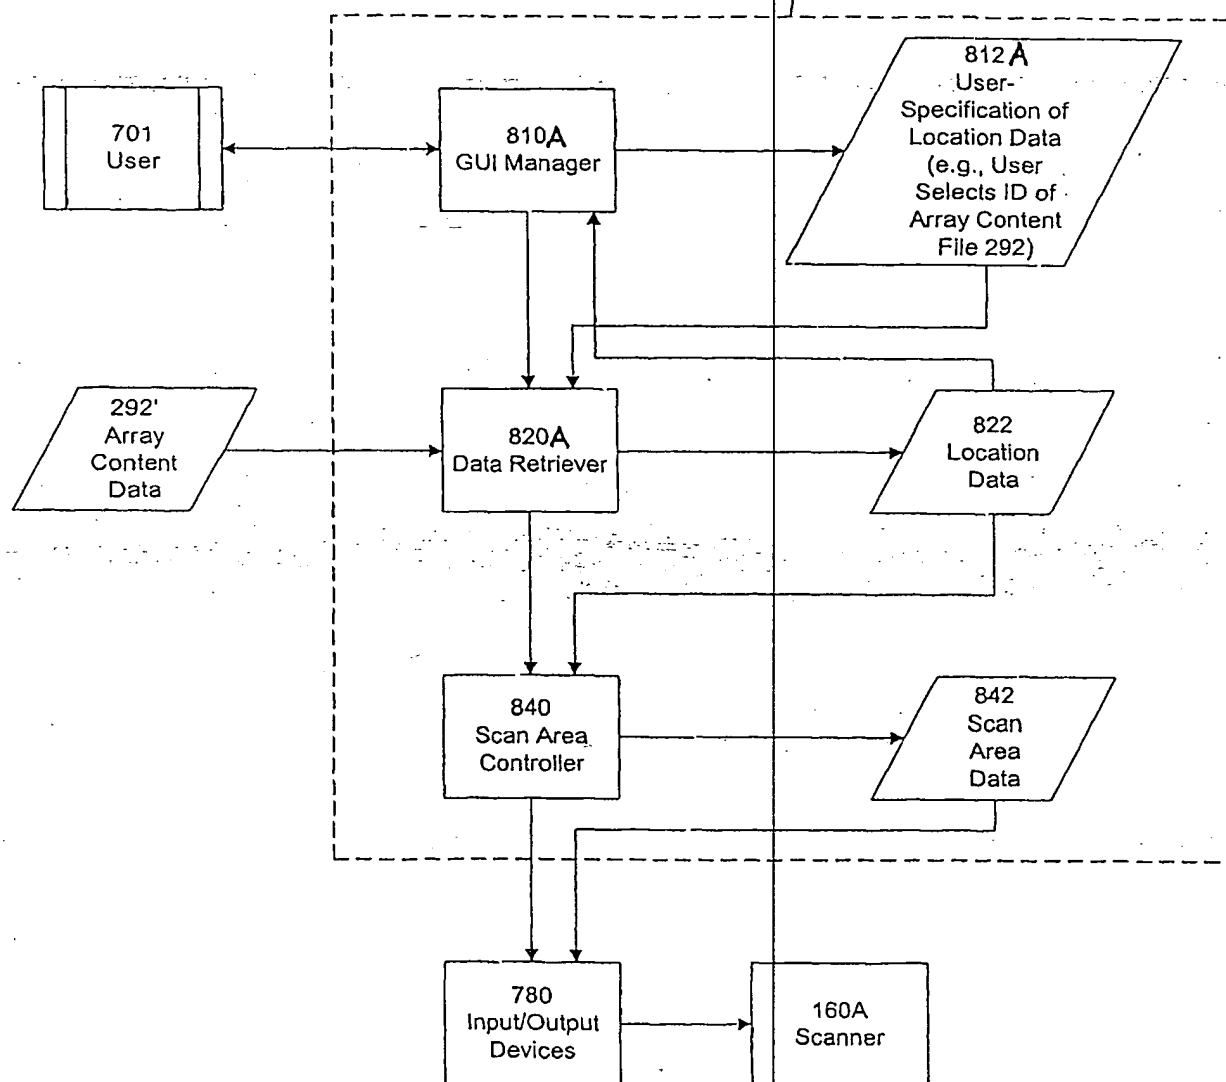


FIGURE 8A

790'
Scanner Control
and Analysis
Application
Executable



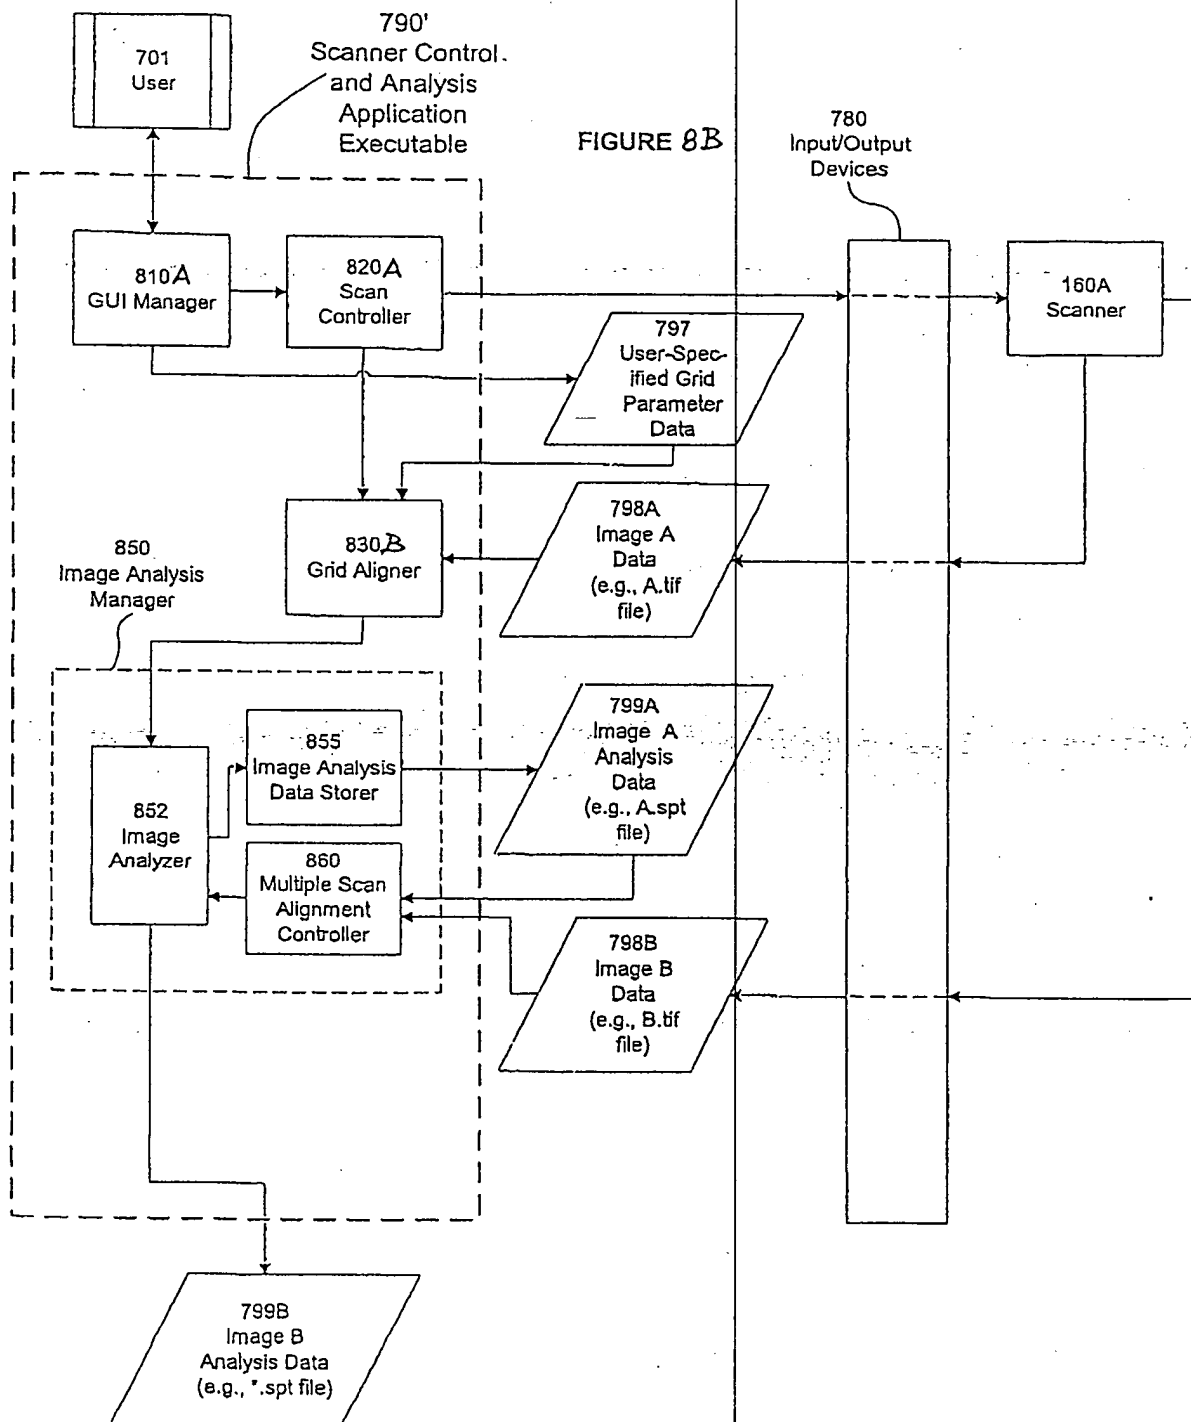


FIGURE 9

782A
GUI

Scanner

Data File Location: c:\program files\allymetrix\jaguar 2\0\data

Experiment Name: #1 428 gain43 cy5

☒ Include Scanned Experiments

Scan 1

Dye: CY5

Laser: 1: Red (635nm)

Filter: 1: FM665-12

Gain: Auto ☒ db

Substrate: Unknown

Line Average: 1

Preview Resolution: 20 μ

Start Preview

Start Scan

Cancel

Scan Area

X: 1.5 mm

Y: 0 mm

Width: 22 mm

Height: 75 mm

☐ Use for All Scans

Est Time: 4:10

2200 x 7500 pixels

31.5 MByte

Use ROI

910

960

970

927

925

912

920

916

914

946

940

942

950

FIGURE 9A

782A
GUI

782A GUI

915A

920

910A

Jaguar 2.0 - [Experiments]

File Edit View Run Tools Window Help

Open Save Print Time Show Status Help

Exit Scan Stop Eject Focus Gain

Data Files

- Experiments
- Image
- Spot
- ART
- CSV
- MegaArray-Test1
- ResGen Pattern

Data File Location: c:\program files\valmetrix\jaguar 2.0\data

Experiment Name: physine-test

Operator Name: Scanner User

Company Name: company name

Array Type: array type

Description: experiment description

ART/CSV File: Edit ResGen Pattern - Physine.csv

Number of Scans: 2

Substrate: Glass

Scan: Scan 2

Queue Name: CY3

Gain: 40 db

Laser: Green (532nm)

Filter: FM570-10

Scan Area

X: 1.5 mm

Y: 22 mm

Width: 19.5 mm

Height: 21 mm

940A

940B

940C

940D

940E

932A

930A

910F

FIGURE 9B

782B
GUI

Scanner

Data File Location: c:\program files\affymetrix\jaguar 2.0\data

Experiment Name: [plysine-test]

☐ Include Scanned Experiments

Scan 1 | Scan 2

Dye: [CY3]

Laser: [2: Green (532nm)]

Filter: [2: FM 570-10]

Gain: ☐ Auto [40] db

Substrate: [Glass]

Line Average: [1]

Preview Resolution: [20 μ]

Start Preview

Scan Area

X: [1.5] mm

Y: [22] mm

Width: [19.5] mm

Height: [21] mm

☒ Use for All Scans

Est. Time: [1:10]

[1950 x 2100] pixels

[7.8] MByte

Start Scan

Cancel

Use ROI

1039

1019

1022

1021

1026

1028

1012

1009

1049

FIGURE 10

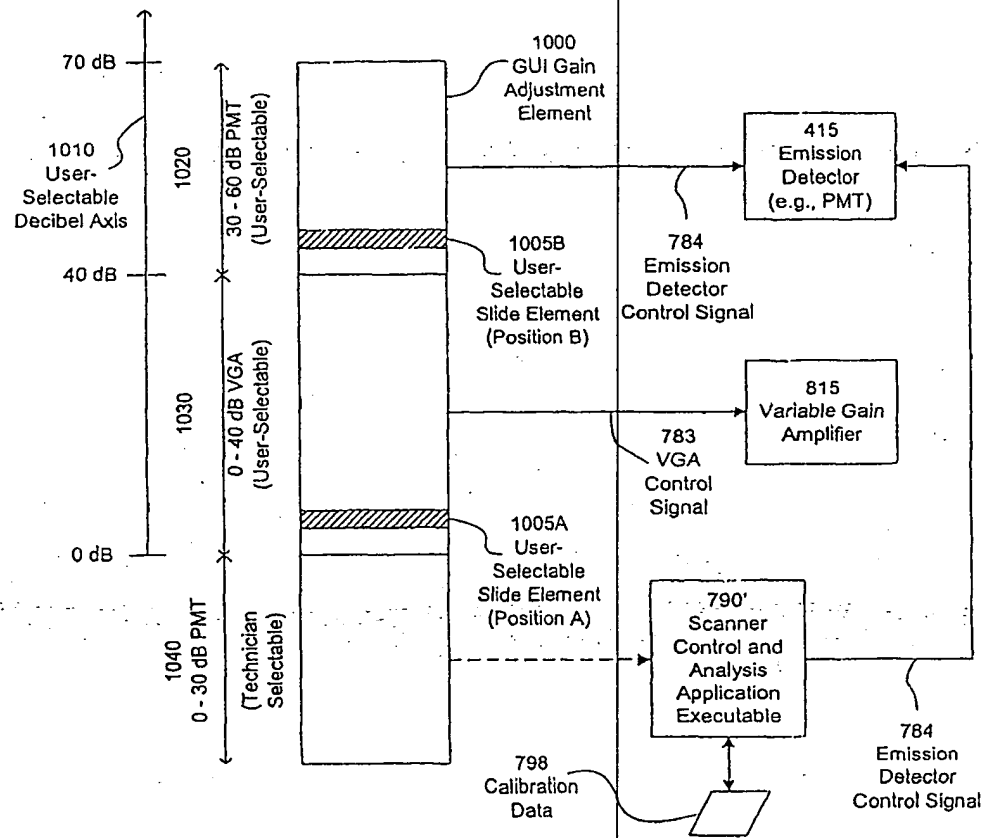


FIGURE 11

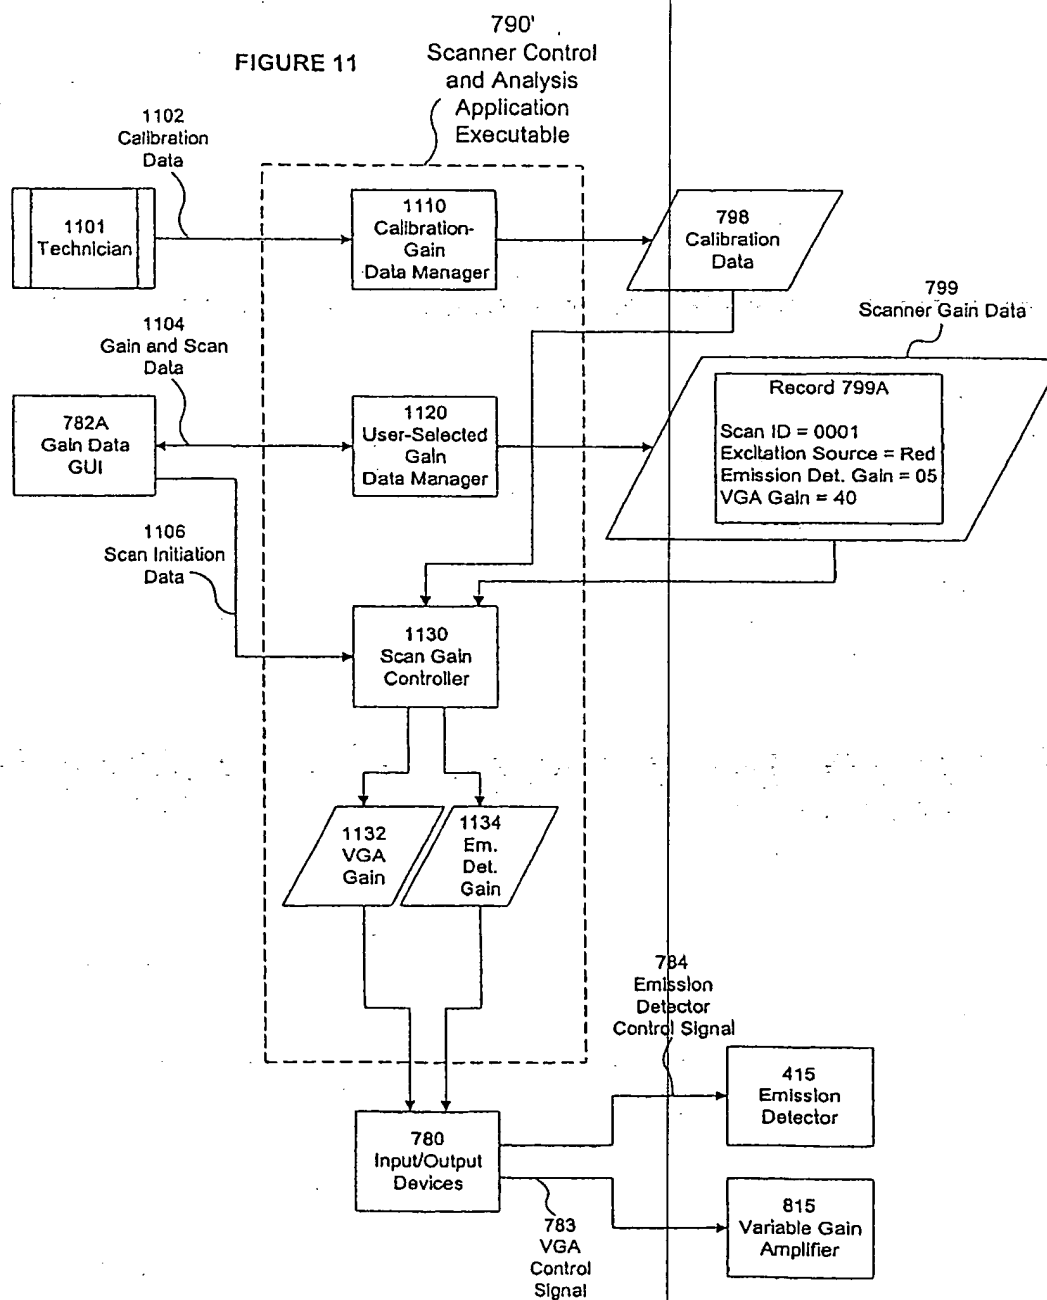


FIGURE 11A

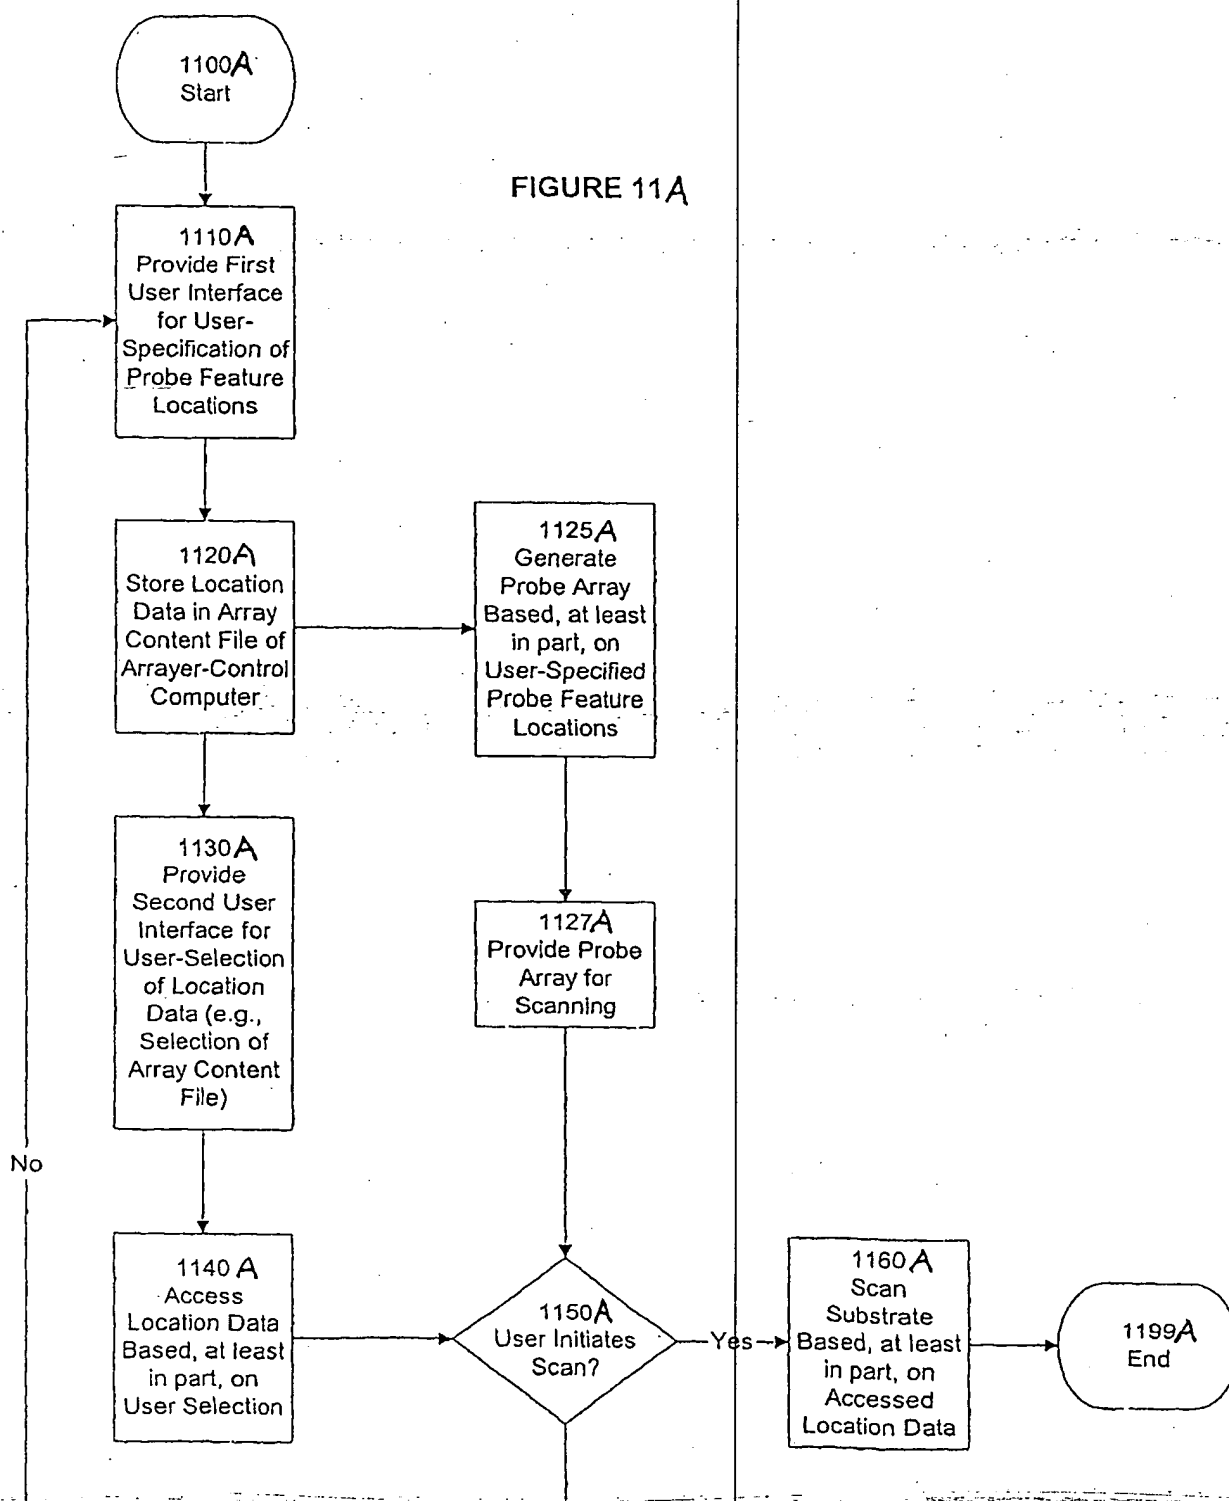


FIGURE 12A

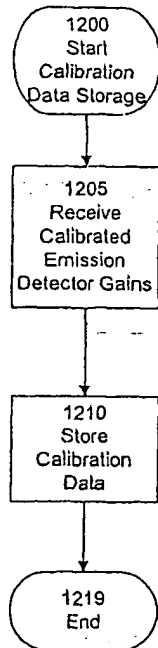


FIGURE 12B

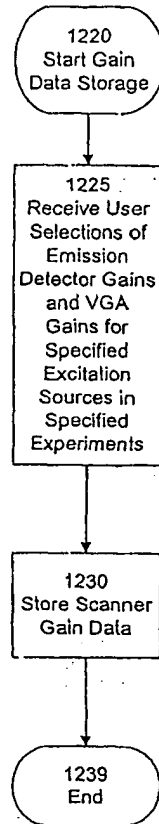


FIGURE 12C

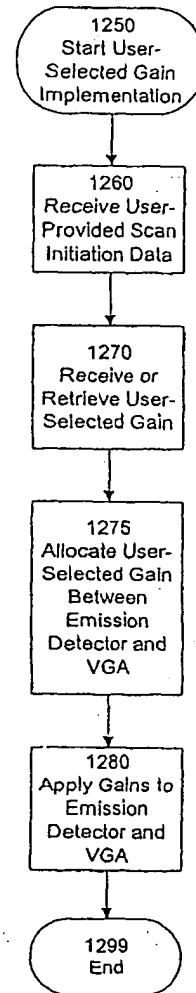


FIGURE 13



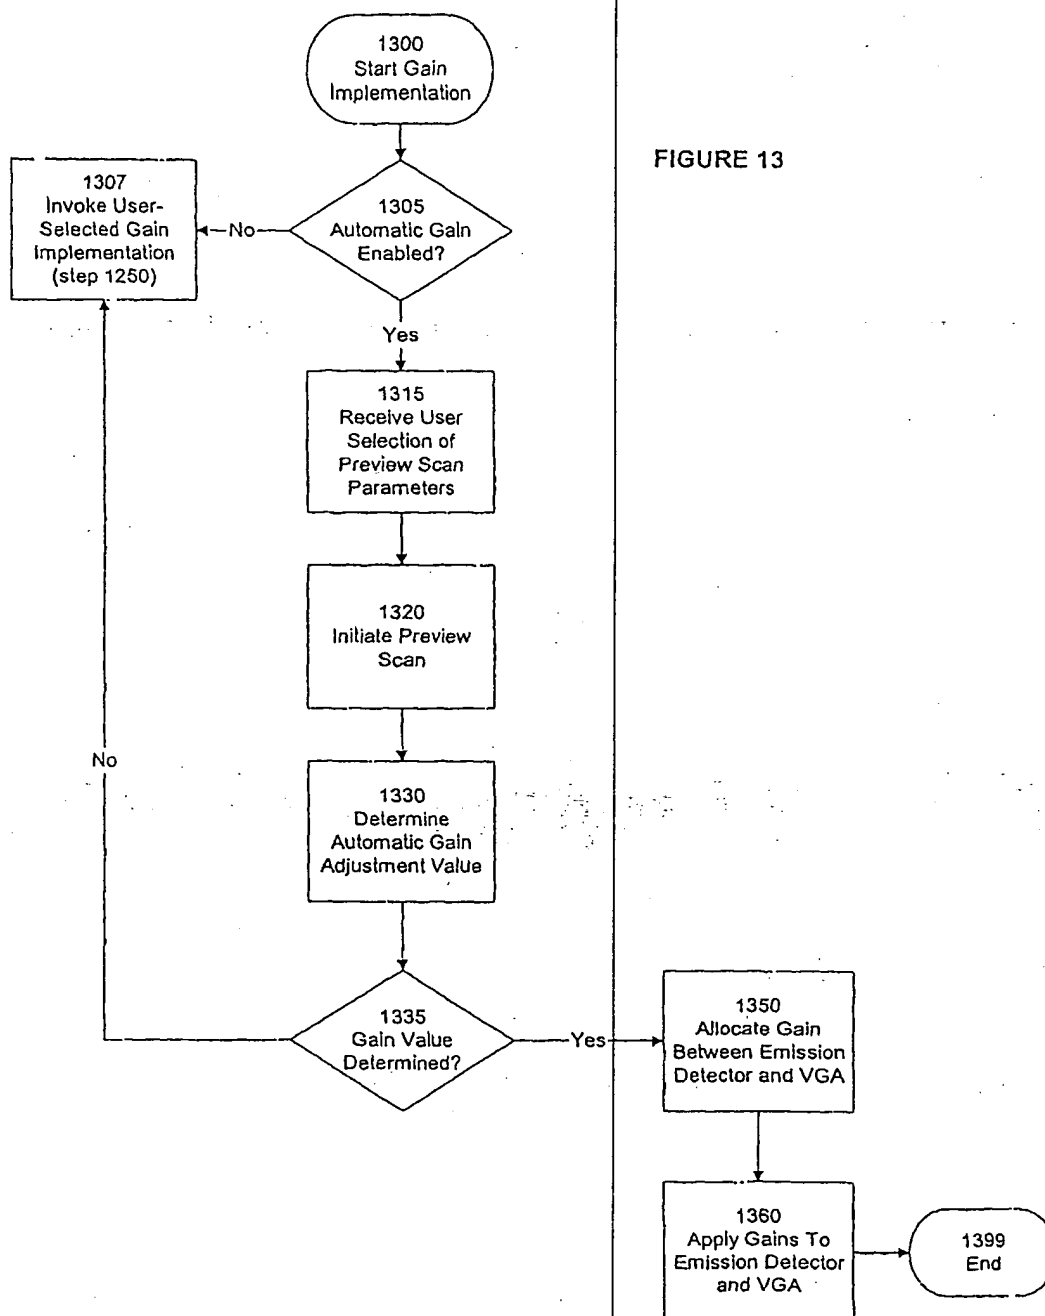


FIGURE 14

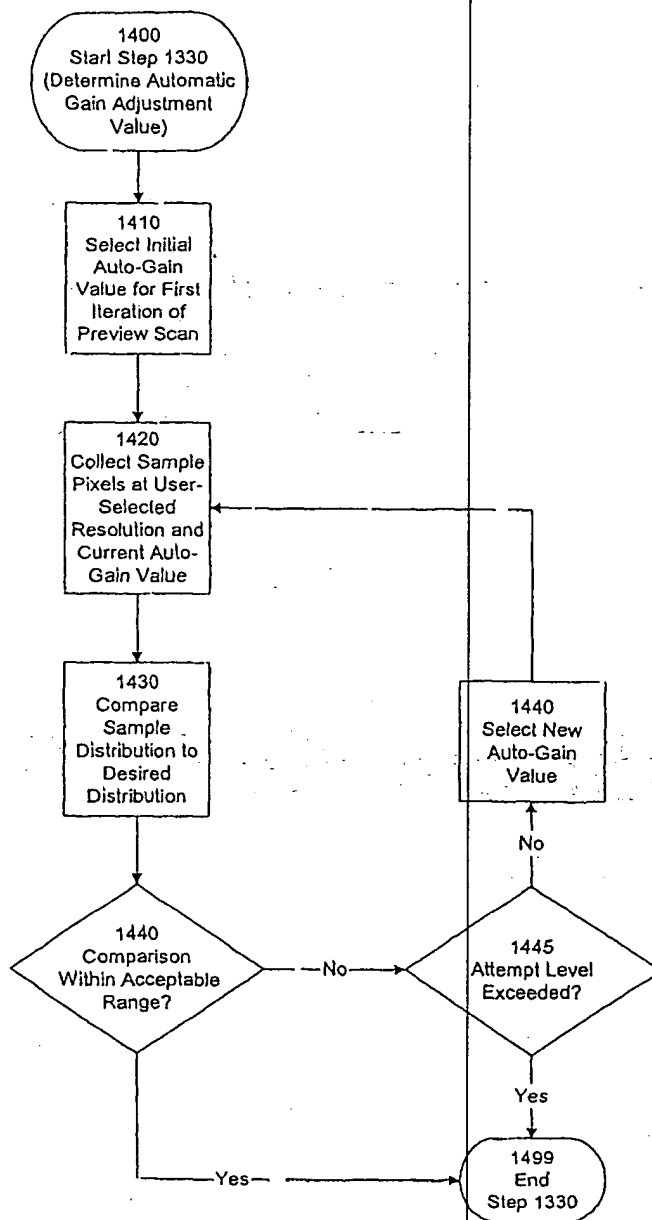

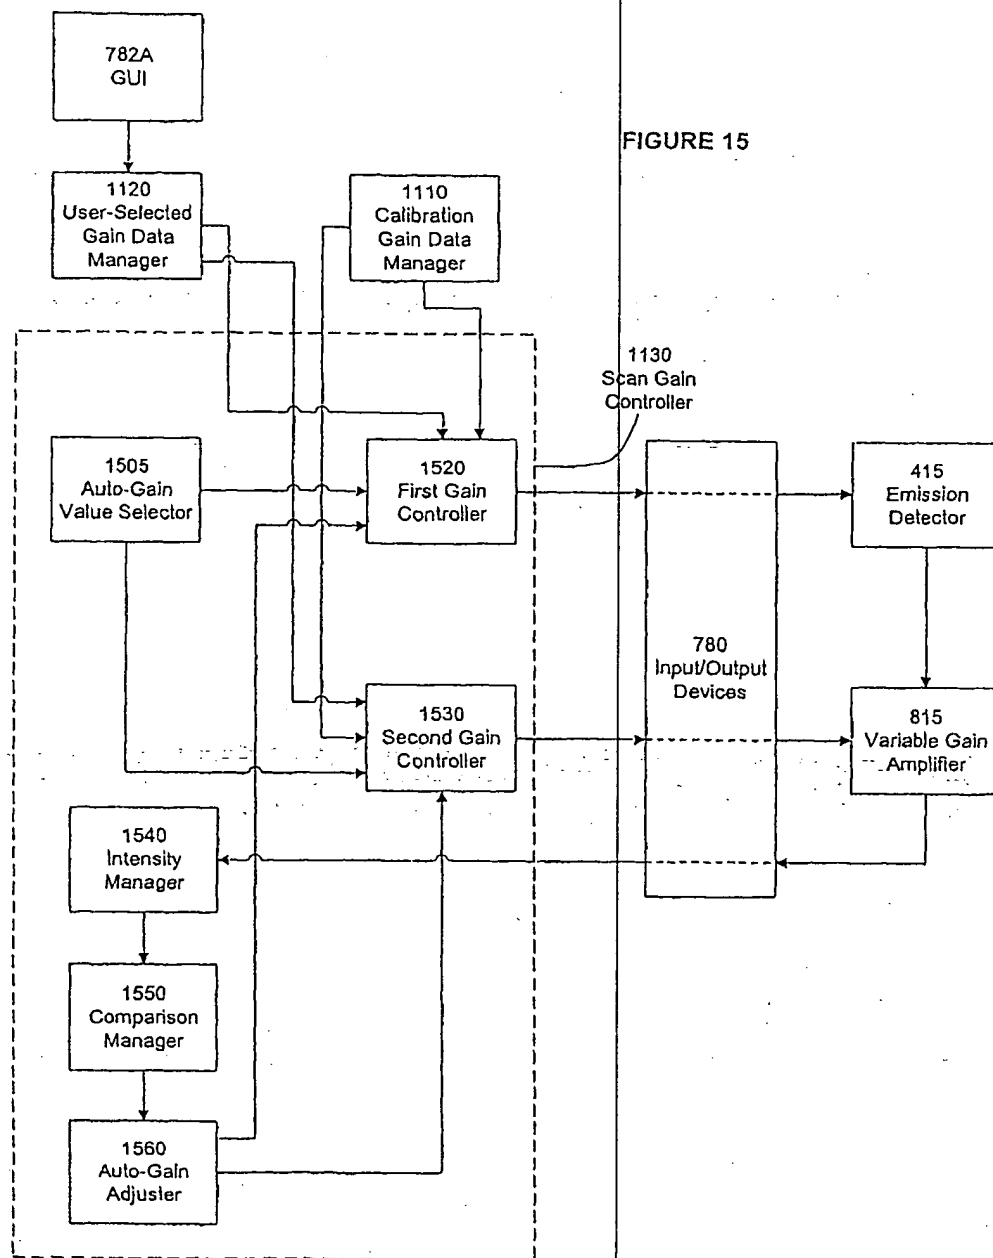

782B
GUI

FIGURE 16

Jaguar 2.0 - [Experiments]

File Edit View Options Help

Experiments Scan Stop

DATA FILES

- Experiments
- Image
- Spot
- ART
- CSV
- MegaArray-Test
- ResGen Pattern

Experiment Name	physine-test
Operator Name	Scanner User
Company Name	company name
Array Type	array type
Description	experiment description
ART, CSV, Image, or Editor	ResGen Pattern - Physine.csv
Number of Scans	2
Substrate	Glass
Scan 1	1619B
Scan 2	1619B
Pin Name	D3
Pin	40
Filter	Green (532nm)
Filter	EM57040

1629

1619A

1639

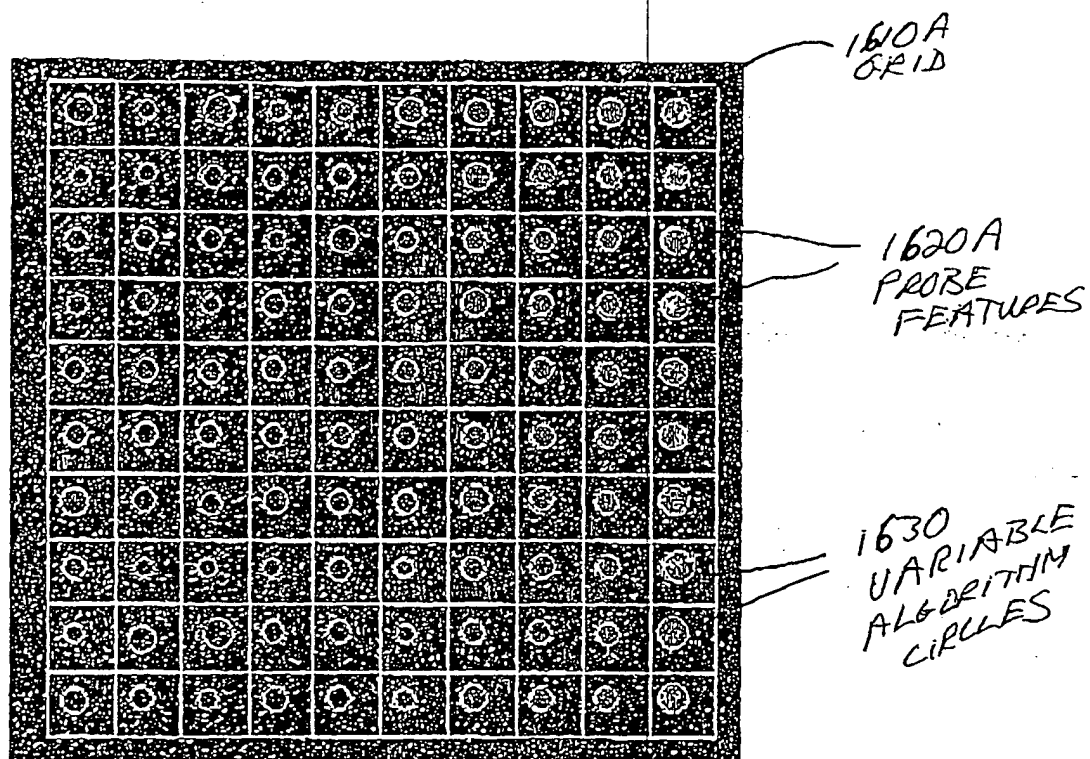


FIGURE 16A

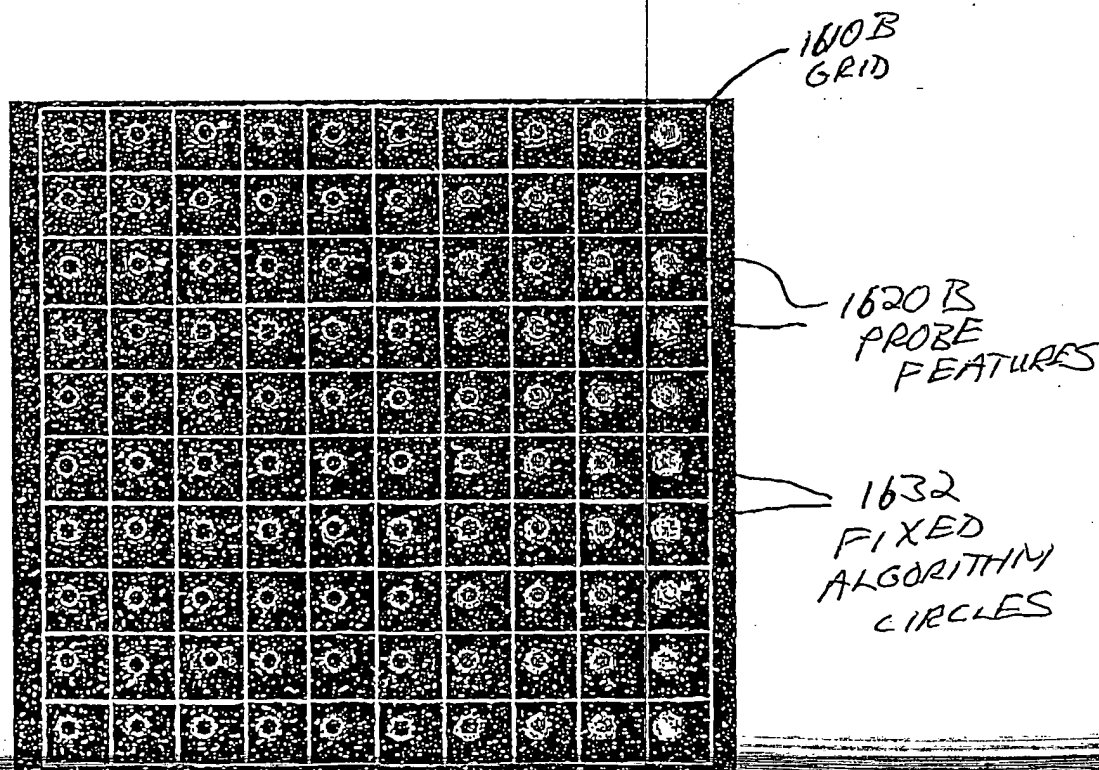


FIGURE 16B

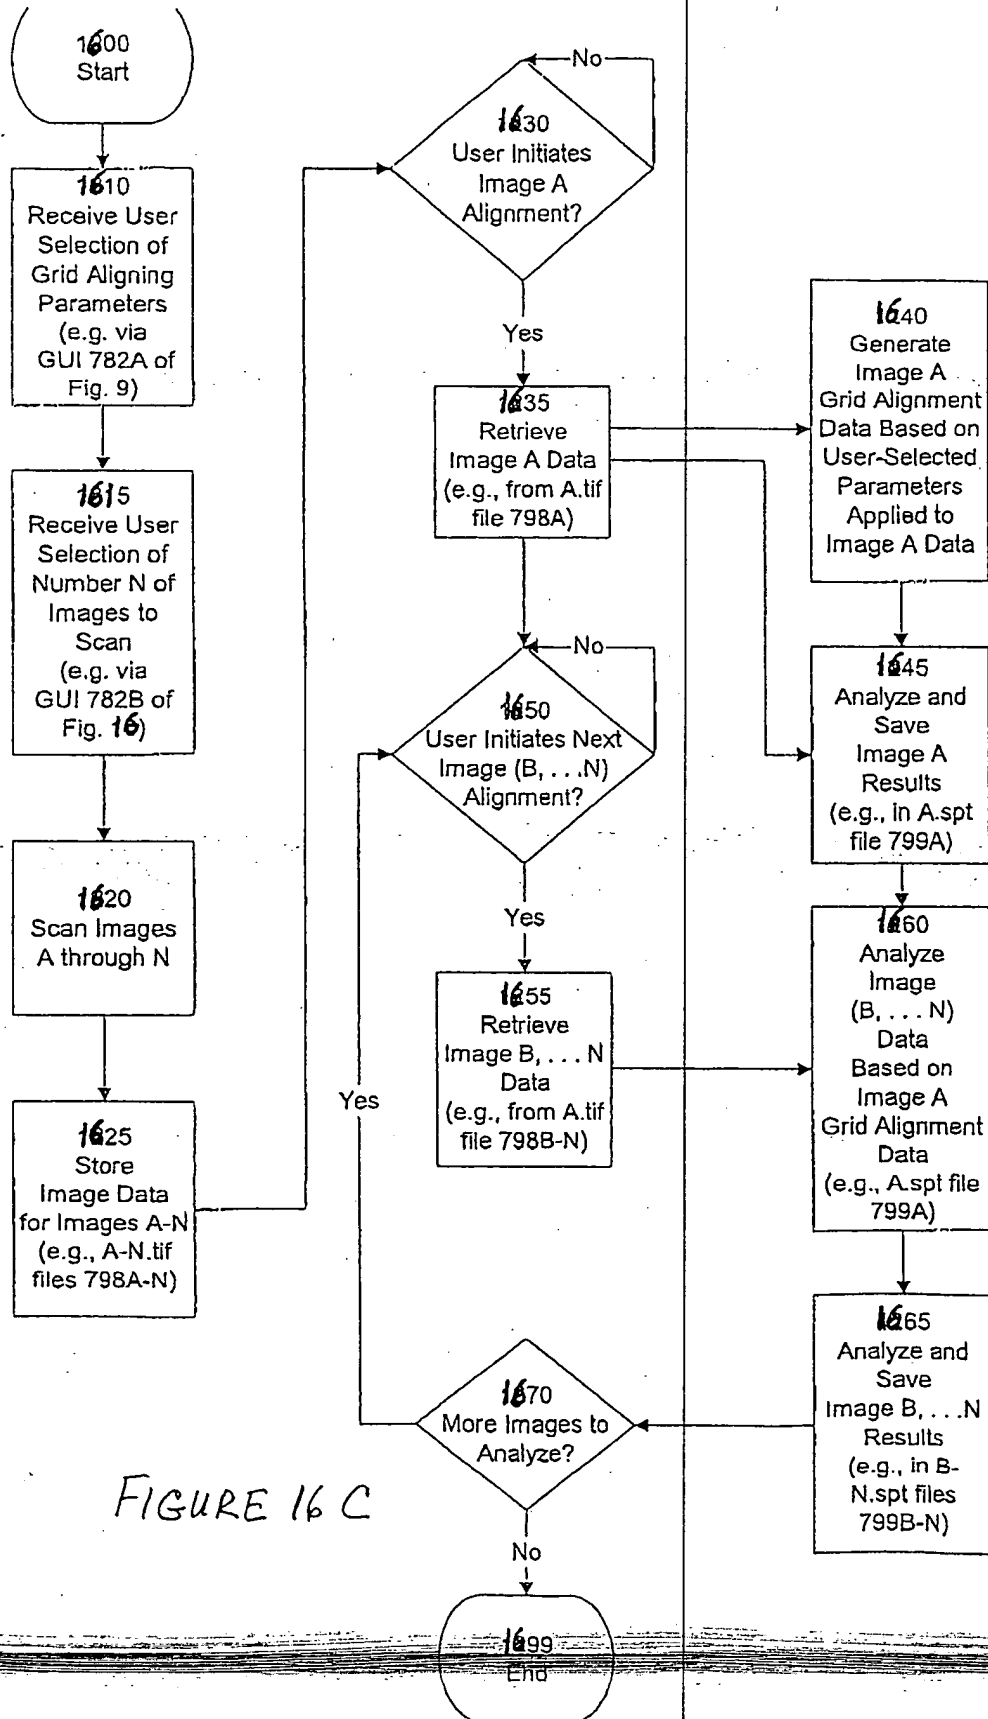


FIGURE 16C